



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C210219	2021/03/12	Vicky	△ X4
E	C210796	2021/05/24	Vicky	△ X1
F	C221890	2022/12/23	Vicky	△ X1

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

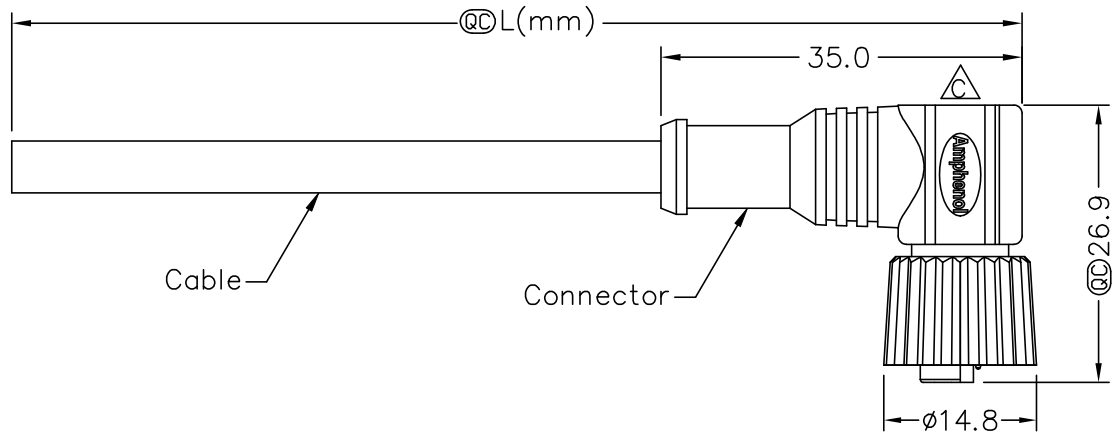

Pin Out	Pin #	Wire
5	Green	綠
4	Black	黑
3	Blue	藍
2	White	白
1	Brown	棕

Conn.	5P
Pin Assignments Front View	

△ 12P-XXBFIM-SR8AXX  
 XX: No. Of Pin  
 XX: 01~99Meters  
 01: 01Meter  
 02: 02Meters  
 :  
 :  
 99: 99Meters  
 Cable Length(L): 01~99Meters

- △ Note:
- \* RoHS Compliant
  - \* @C Important dimension
  - △ \* Waterproof rate: IP68, mated 1m/24h IP69K, mated
  - \* Connector
  - △ Housing: Thermoplastic, Black
  - Pin: Copper alloy, Gold plated
  - O-Ring: Rubber, Green
  - Nut: Thermoplastic, Black
  - Outer mold: Thermoplastic, Black
  - \* Cable: UL2464, 22#\*5C+Talcum, OD=5.5mm, PVC Jacket, UV Resistant, Black
  - △ \* Cable length tolerance:
    - 1M: +50/-0 mm
    - 1M < L ≤ 3M: +100/-0 mm
    - 3M < L ≤ 5M: +150/-0 mm
    - 5M < L ≤ 10M: ±100 mm
    - 10M < L ≤ 20M: ±200 mm
    - 20M < L ≤ 30M: ±300 mm
    - △ 30M < L ≤ 99M: ±500 mm

UNIT:mm		TITLE O SEN, M12 A -PLASTIC(I) △ △ CABLE W/O SR, F, I, MOLDING	<b>Amphenol LTW</b>		ITEM NO	DRAWN BY Zhao Rong Fu	DATE 2009/02/04
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1	<b>安費諾亮泰企業股份有限公司</b>		DWG NO 12P-XXBFIM-SR8AXX △	CHECKED BY Tina	DATE 2009/02/04
REV. F	SIZE A4	@C : Inspection Item			CUSTOMER ALTW	APPROVED BY Luke	DATE 2009/03/12