


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
E	C210219	2021/03/15	Vicky	△ X4
F	C210796	2021/05/24	Vicky	△ X4
G	C221890	2022/12/23	Vicky	△ X1

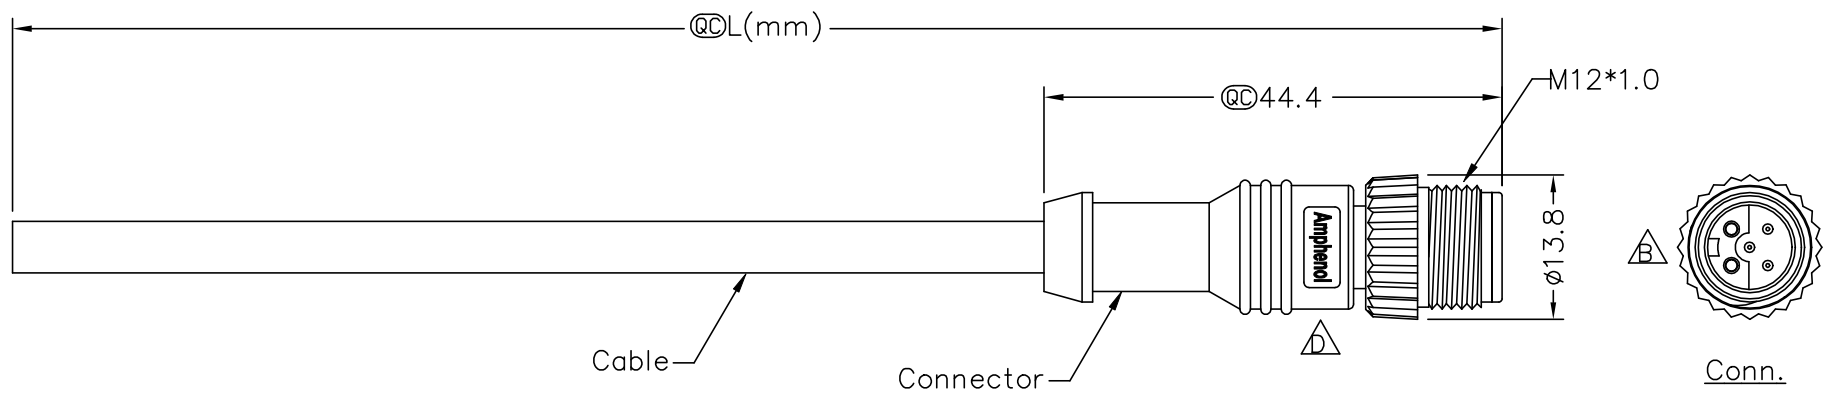

Pin Out	Pin #	Wire
5	Green	綠
4	Black	黑
3	Blue	藍
2	White	白
1	Brown	棕

Conn.	5P
Pin Assignments Front View	

△ 12P-XXBMIM-SL8AXX
 XX: No. Of Pin
 XX: 01~99Meters
 01: 01Meter
 02: 02Meters
 :
 :
 99: 99Meters
 Cable Length(L): 01~99Meters

- △ Note:
- * RoHS Compliant
 - * @D Important dimension
 - △ * Waterproof rate: IP68, mated 1m/24h
IP69K, mated
 - * Connector
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
Nut: Thermoplastic, Black
Outer mold: Thermoplastic, Black
 - * Cable: UL2464, 22#*5C+Talcum, OD=5.5mm,
PVC Jacket, UV Resistant, Black
 - △ * Cable length tolerance:
1M: +50/-0 mm
1M < L ≤ 3M: +100/-0 mm
3M < L ≤ 5M: +150/-0 mm
5M < L ≤ 10M: ±100 mm
10M < L ≤ 20M: ±200 mm
20M < L ≤ 30M: ±300 mm
△ 30M < L ≤ 99M: ±500 mm

UNIT:mm		TITLE
TOLERANCE	±0.5mm	0 SEN, M12 A -PLASTIC(I) △ △ CABLE W/O SR, M, I, MOLDING
SCALE	Free	SHEET 1 OF 1
REV.	G	SIZE A4
◎ : Inspection Item		

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE

12P-XXBMIM-SL8AXX △
 ALTW
 Vicky
 Rita
 Lisa
 2016/06/06
 2016/06/06
 2016/06/06

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.