



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C210219	2021/03/15	Vicky	△ X4
E	C210796	2021/05/24	Vicky	△ X1
F	C221890	2022/12/23	Vicky	△ X1

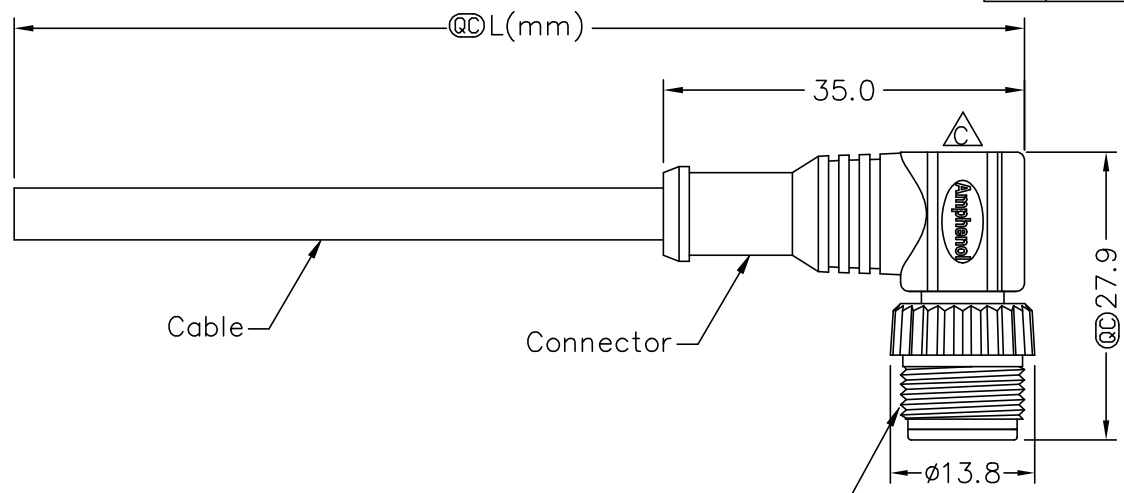

Pin Out	Pin #	Wire	Color
5		Green	綠
4		Black	黑
3		Blue	藍
2		White	白
1		Brown	棕

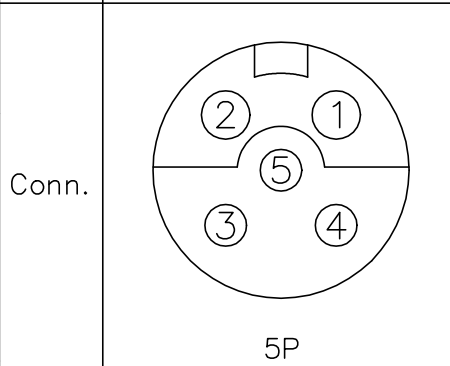

△△12P-XXBMIM-SR8AXX
 XX: No. Of Pin
 XX: 01~99Meters
 01: 01Meter
 02: 02Meters
 :
 :
 99: 99Meters
 Cable Length(L): 01~99Meters

- △ Note:
 * RoHS Compliant
 * @ Important dimension
 △ * Waterproof rate: IP68, mated 1m/24h
 IP69K, mated
 * Connector
 △ Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 Nut: Thermoplastic, Black
 Outer mold: Thermoplastic, Black
 * Cable: UL2464, 22#*5C+Talcum, OD=5.5mm,
 PVC Jacket, UV Resistant, Black
 △ * Cable length tolerance:
 1M: +50/-0 mm
 1M < L ≤ 3M: +100/-0 mm
 3M < L ≤ 5M: +150/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 20M: ±200 mm
 20M < L ≤ 30M: ±300 mm
 △ 30M < L ≤ 99M: ±500 mm

Pin Assignments
Front View

UNIT:mm		TITLE
TOLERANCE	±0.5mm	0 SEN, M12 A -PLASTIC(I) △△ CABLE W/O SR, M, I, MOLDING
SCALE	Free	SHEET 1 OF 1
REV.	F	SIZE A4
		@ : Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
	Zhao Rong Fu	2009/02/04
	Tina	2009/02/04
ALTW	Luke	2009/03/13

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.