



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1670212~214	2016-07-13	Feng_Li	Modify Note and Product No.

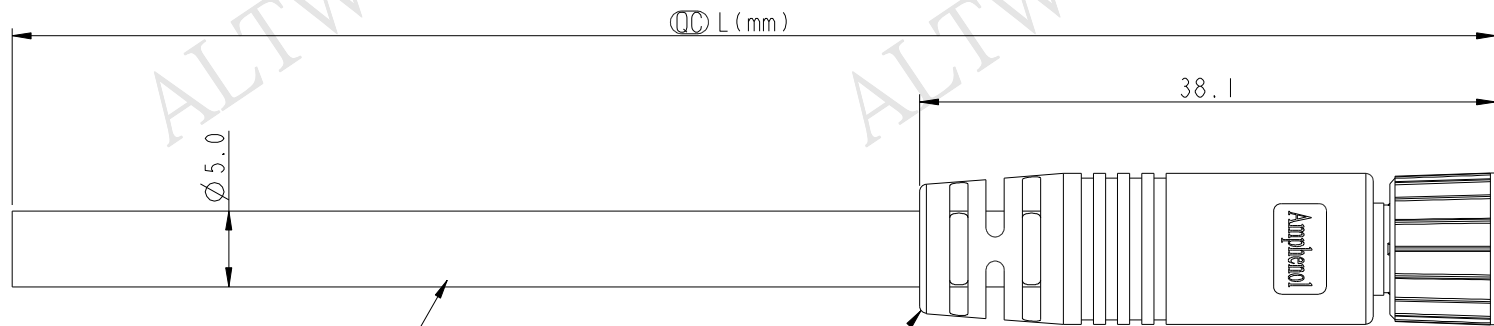


Conn.

Cable ②  
 △ 8A-06AFFM-SL7000  
 Color: Black

△ 8A-06AFFM-SL7AXX  
 XX: 01~99Meters  
 01: 01Meter  
 02: 02Meter  
 ...  
 99: 99Meters  
 Cable Length(L): 01~99Meters



- Note:
- \* ① Important Dimension.
  - \* Waterproof Rate: IP67.
  - \* Connector: PU, Black.
  - \* Female Pin: Copper Alloy, Gold Plated.
  - \* Screw Nut: Zinc Alloy, Nickel Plated.
  - \* Cable: UL2464 24AWG\*6C+Al/Mylar, PVC Jacket, UV Resistant, OD=5.0, Black.
  - \* Cable Length Tolerance:
    - 01M: ±40mm
    - 02~05M: ±60mm
    - 06~10M: ±100mm
    - 11~30M: ±200mm
    - 31~99M: ±500mm



Pin Assignments  
Front View

6	Green 綠
5	Yellow 黃
4	Orange 橘
3	Red 紅
2	Brown 棕
1	Black 黑
Conn.	Wire Color

Pin Out

UNIT:mm		
TOLERANCE ±0.5 mm		

TITLE M8 6Pin Cable F Conn. F Pin			
SCALE 2:1	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. A.4	①: Inspection item	

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Feng_Li	DATE 2016-07-13
DWG NO 8A-06AFFM-SL7AXX	CHECKED BY Jinhai	DATE 2016-07-13
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2016-07-13