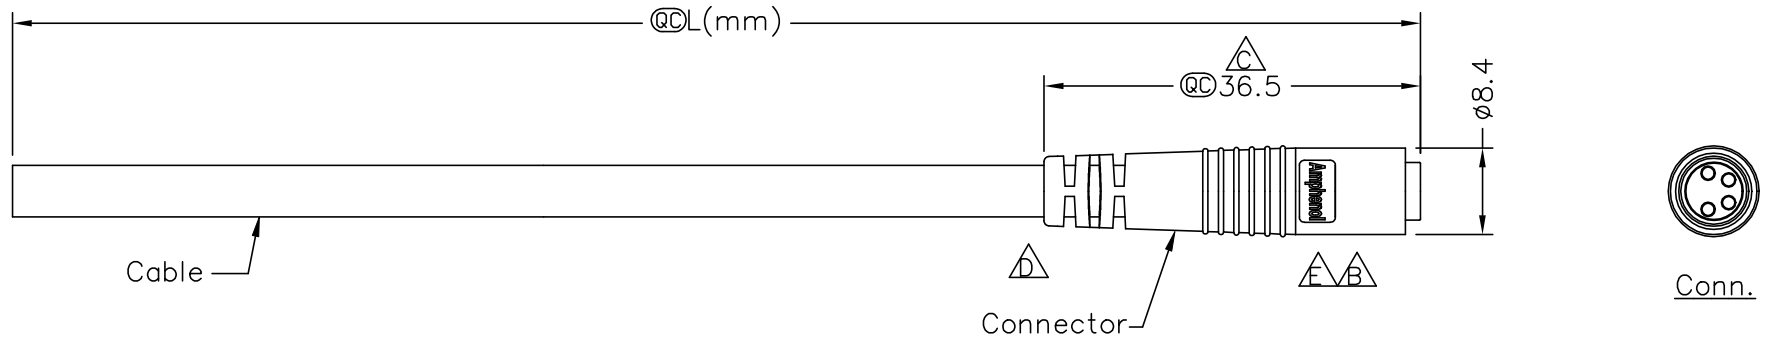


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
E	LEN1530302~306	2015/02/11	Ruru	Change Logo
F	C210213	2021/07/23	Ruru	△X8
G	C221880	2022/12/06	Vicky	△X1



- △△△ Note:**
- \* RoHS Compliant
  - \* @C Important dimension
  - △G** \* Waterproof rate: IP65, mated
  - \* Connector
    - Housing: Thermoplastic, Black
    - Pin: Copper alloy, Gold plated
    - Outer mold: Thermoplastic, Black
  - \* Cable: UL2464, PVC Jacket, Black
  - \* Cable length tolerance:
    - 1M: +50/-0 mm
    - 1M < L ≤ 3M: +100/-0 mm
    - 3M < L ≤ 5M: +150/-0 mm
    - 5M < L ≤ 10M: ±100 mm
    - 10M < L ≤ 20M: ±200 mm
    - 20M < L ≤ 30M: ±300 mm
    - 30M < L ≤ 99M: ±500 mm

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

UNIT: mm	TITLE 0 SEN, M8 PLASTIC △△△ CABLE W/SR, F, F, MOLDING		<b>Amphenol LTW</b> 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY	DATE
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 2		DWG. NO △ 8P-XXAFFM-QL5AXX	CHECKED BY	DATE
	REV. G	SIZE A4	@C : Inspection Item	CUSTOMER ALTW	APPROVED BY	DATE
					Ruru	2015/02/11
					Rita	2015/02/11
					Lion	2015/02/11



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

4P	5.0	22	8P-04FFM-QL5AXX
3P	5.0	22	8P-03FFM-QL5AXX
Contacts	Cable OD	AWG	Item No.

△  
8P-XXAFFM-QL5AXX

XX: No. Of Pin

XX: 01~99Meters  
 01: 01Meter  
 02: 02Meters  
 :  
 :  
 99: 99Meters

△ Pin Out	4 Black 黑 3 Blue 藍 1 Brown 棕	4 Black 黑 3 Blue 藍 2 White 白 1 Brown 棕
	Pin # Wire	Pin # Wire
Conn.		
	3P	4P
Pin Assignments Front View		

UNIT: mm TOLERANCE ±0.5 mm	TITLE 0 SEN, M8 PLASTIC △△ CABLE W/SR, F, F, MOLDING		<b>Amphenol LTW</b> 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Ruru	DATE 2015/02/11
	SCALE Free	SHEET 2 OF 2		DWG. NO △ 8P-XXAFFM-QL5AXX	CHECKED BY Rita	DATE 2015/02/11
REV. G	SIZE A4	QC: Inspection Item	CUSTOMER ALTW	APPROVED BY Lion	DATE 2015/02/11	