


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
E	LEN1530302~306	2015/02/11	Ruru	Change Logo
F	C210213	2021/07/23	Ruru	F X8
G	C221880	2022/12/06	Vicky	G X1

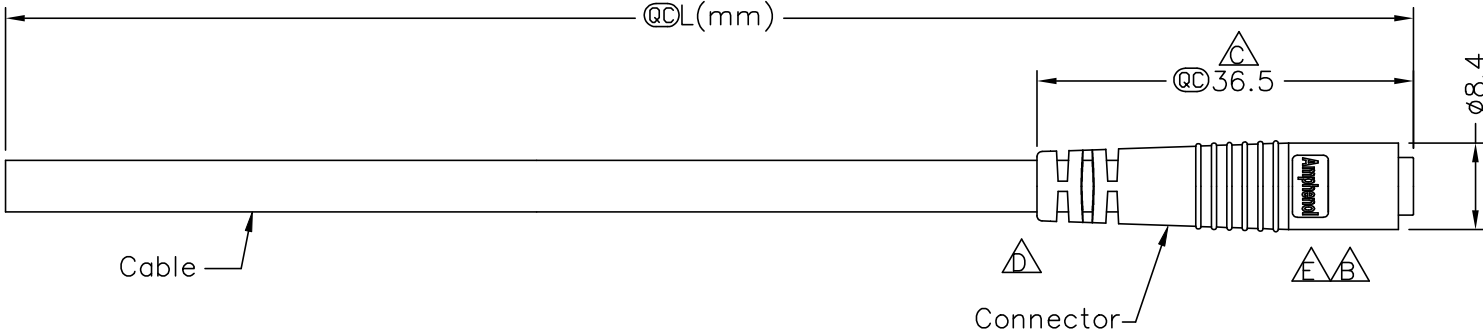

- △△△Note:
- \* RoHS Compliant
  - \* @CImportant dimension
  - △\* Waterproof rate: IP65, mated
  - \* Connector
    - Housing: Thermoplastic, Black
    - Pin: Copper alloy, Gold plated
    - Outer mold: Thermoplastic, Black
  - \* Cable: PU acket, Black
  - \* Cable length tolerance: 1M: +50/-0 mm
    - 1M < L ≤ 3M: +100/-0 mm
    - 3M < L ≤ 5M: +150/-0 mm
    - 5M < L ≤ 10M: ±100 mm
    - 10M < L ≤ 20M: ±200 mm
    - 20M < L ≤ 30M: ±300 mm
    - 30M < L ≤ 99M: ±500 mm

UNIT:mm	TITLE O SEN, M8 PLASTIC △△△ CABLE W/SR, F, F, MOLDING		
TOLERANCE	SCALE Free	SHEET 1 OF 2	
±0.5 mm	REV. G	SIZE A4	@C:Inspection Item

ITEM NO		DRAWN BY Ruru	DATE 2015/02/11
DWG.NO △ 8P-XXAFFM-QL5BXX		CHECKED BY Rita	DATE 2015/02/11
CUSTOMER ALTW		APPROVED BY Lion	DATE 2015/02/11

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

