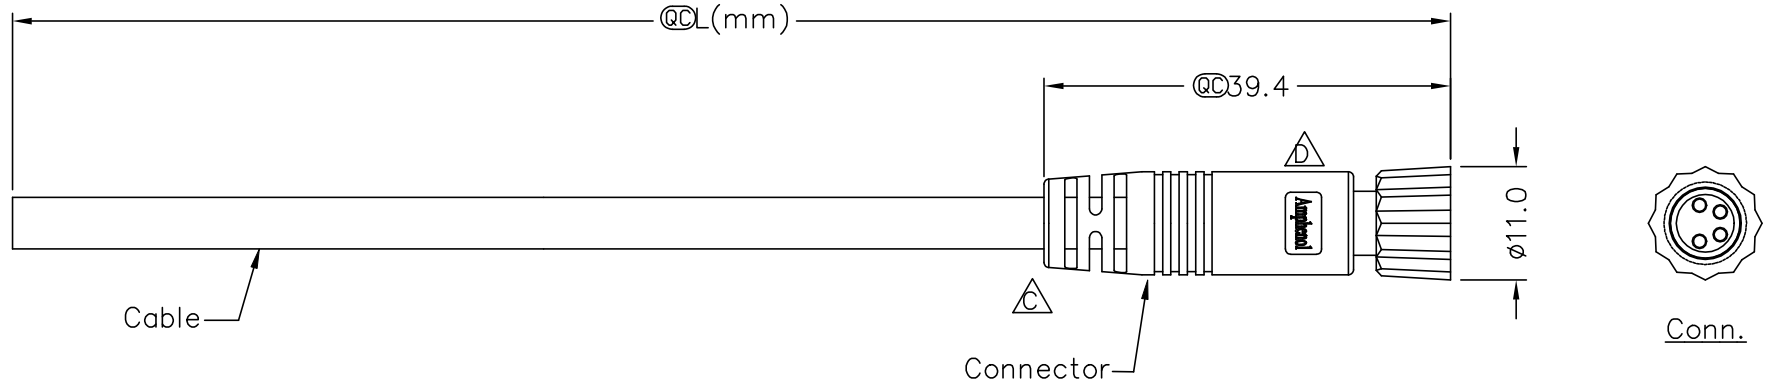


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	LEN1630122~125	2016/02/22	Ruru	Change Logo
E	C210213	2021/04/23	Ruru	△X8
F	C221880	2022/12/06	Vicky	△X1



- △△△ Note:
- * RoHS Compliant
 - * @C Important dimension
 - △* Waterproof rate: IP67, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - O-Ring: Rubber, Green
 - Nut: Thermoplastic, Black
 - Outer mold: Thermoplastic, Black
 - * Cable: PU acket, Black
 - * Cable length tolerance:
 - 1M: +50/-0 mm
 - 1M < L ≤ 3M: +100/-0 mm
 - 3M < L ≤ 5M: +150/-0 mm
 - 5M < L ≤ 10M: ±100 mm
 - 10M < L ≤ 20M: ±200 mm
 - 20M < L ≤ 30M: ±300 mm
 - 30M < L ≤ 99M: ±500 mm

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

UNIT: mm	
TOLERANCE	
±0.5 mm	

TITLE		O SEN, M8 PLASTIC △△△	
SCALE		Free	
REV.	SIZE	SHEET	OF
F	A4	1	2
△@: Inspection Item			


Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DWG. NO	CUSTOMER
	△ 8P-XXAFFM-SL7BXX	ALTW



DRAWN BY	CHECKED BY	APPROVED BY
Ruru	Rita	Lisa

DATE	DATE	DATE
2016/02/22	2016/02/22	2016/02/22

4P	4.8	22	8P-04AFFM-SL7BXX
3P	4.5	22	8P-03AFFM-SL7BXX
Contacts	Cable OD	AWG	Item No.


 8P-XXAFFM-SL7BXX
 XX: No. Of Pin

XX: 01~99Meters
 01: 01Meter
 02: 02Meters
 :
 :
 99: 99Meters

Pin Out	4 Black 黑 3 Blue 藍 1 Brown 棕	4 Black 黑 3 Blue 藍 2 White 白 1 Brown 棕
	Pin # Wire	Pin # Wire
Conn.		
	3P	4P
Pin Assignments Front View		

UNIT: mm 	TITLE 0 SEN, M8 PLASTIC CABLE W/SR, F, F, MOLDING		 Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Ruru	DATE 2016/02/22	
	TOLERANCE ±0.5 mm	SCALE Free		SHEET 2 OF 2	DWG. NO  8P-XXAFFM-SL7BXX	CHECKED BY Rita	DATE 2016/02/22
		REV. F		SIZE A4	CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016/02/22
		QC: Inspection Item					

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.