



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201735	2020/11/09	Ruru	\triangle_B X5
C	C210226	2021/03/30	Vicky	\triangle_C X4
D	C221995	2022/12/26	Vicky	\triangle_D X2

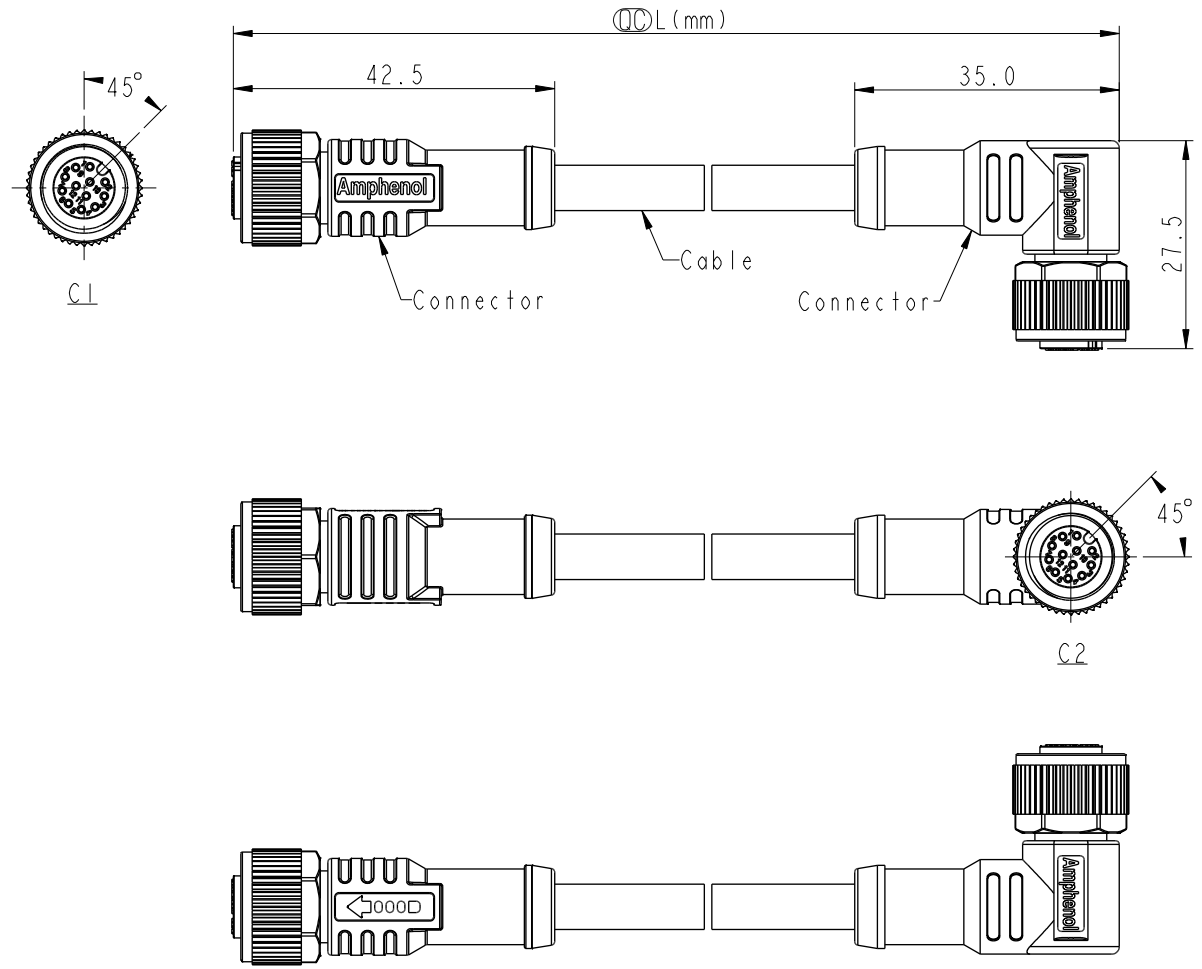

Note:

- * RoHS Compliant
- * \circ Important dimension
- * C1
- \triangle_D Waterproof rate: IP68, mated 1m/24h
IP69K, mated
- Housing: Thermoplastic, Black
- Pin: Copper alloy, Gold plated
- O-Ring: Rubber, Green
- Nut: Metal
- Outer Mold: Thermoplastic, Black

* C2

- \triangle_D Waterproof rate: IP68, mated 1m/24h
IP69K, mated
- Housing: Thermoplastic, Black
- Pin: Copper alloy, Gold plated
- O-Ring: Rubber, Green
- Nut: Metal
- Outer Mold: Thermoplastic, Black

* Cable: UL20549, PUR Jacket, Black

- * Cable Length Tolerance: 0.5M < L ≤ 1M: +60/-0 mm
- 1M < L ≤ 3M: +120/-0 mm
- 3M < L ≤ 5M: +160/-0 mm
- 5M < L ≤ 10M: ±100 mm
- 10M < L ≤ 20M: ±200 mm
- 20M < L ≤ 30M: ±300 mm
- 30M < L ≤ 99M: ±500 mm

UNIT: mm			TITLE ACC, SEN, A Code, DB-ENDED FF	\triangle_C
TOLERANCE ±0.5mm	SCALE 1:2	SIZE A4	SHEET 1 OF 2	REV. D
	WC-REV. A.1	\circ : Inspection item		

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2018-12-04
DWG NO \triangle_B M12AXXFL-12AFR-SBXXX	CHECKED BY Rita	DATE 2018-12-04
CUSTOMER ALTW	APPROVED BY Max	DATE 2018-12-04

