
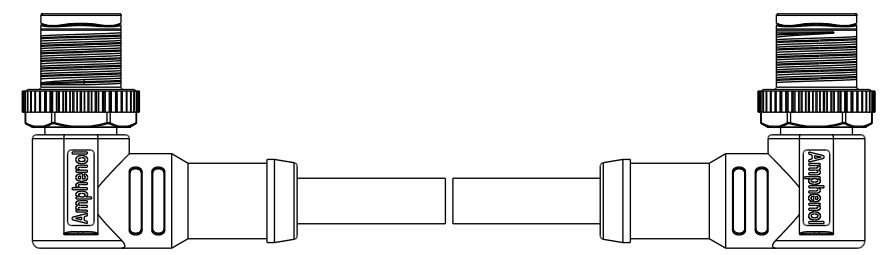
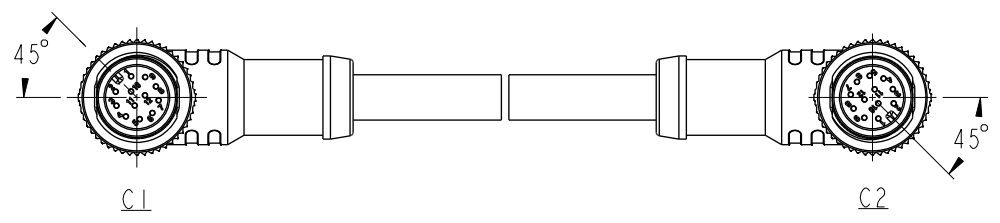


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C210022	2021/01/07	Vicky	$\triangle C$ XI
D	C210229	2021/04/01	Vicky	$\triangle D$ X4
E	C222004	2022/12/28	Vicky	$\triangle E$ XI

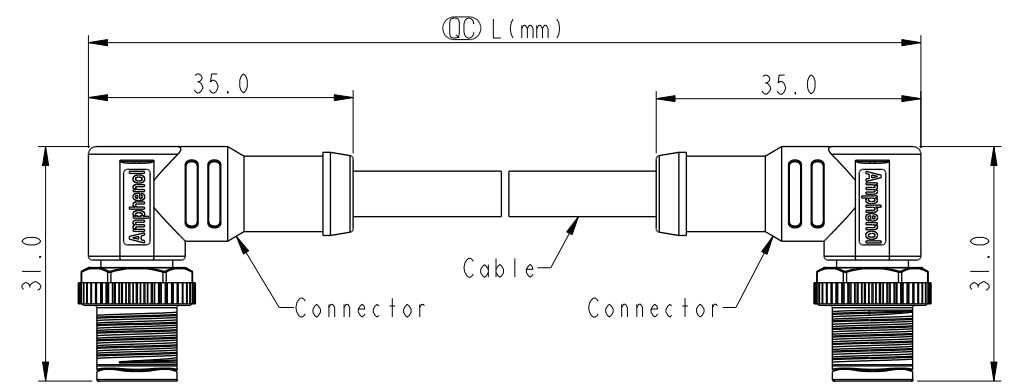

- $\triangle B \triangle D$
Note:
- * RoHS Compliant
 - * CC Important dimension
 - * $\triangle E$ Waterproof rate: IP68, mated 1m/24h
IP69K, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - * $\triangle C$ Nut: Metal
 - * Outer Mold: Thermoplastic, Black
 - * Cable: UL20549, PUR Jacket, Black
 - * Cable Length Tolerance:

0.5M < L ≤ 1M	: +60/-0 mm
1M < L ≤ 3M	: +120/-0 mm
3M < L ≤ 5M	: +160/-0 mm
5M < L ≤ 10M	: ±100 mm
10M < L ≤ 20M	: ±200 mm
20M < L ≤ 30M	: ±300 mm
30M < L ≤ 99M	: ±500 mm

UNIT: mm	CC	TITLE	$\triangle D$
TOLERANCE	$\pm 0.5\text{mm}$	ACC, SEN, A Code, DB-ENDED MM	
SCALE	1:1	SIZE	A4
REV.	E	WC-REV.	
		SHEET	1 OF 2
		CC : Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Vicky	2018-12-07
DWG NO	CHECKED BY	DATE
$\triangle B$ MI2AXXMR-12AMR-SBXXX	Rita	2018-12-07
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2018-12-07

