


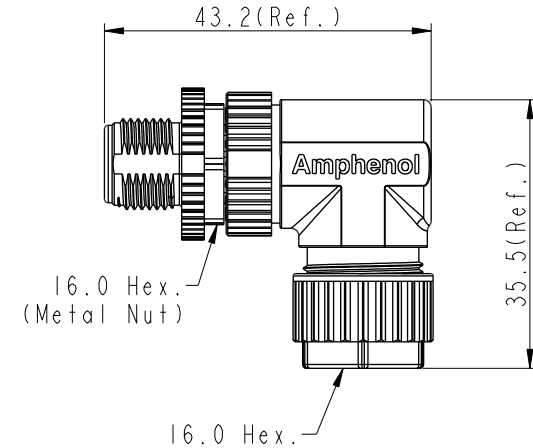





REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C210024	2021/01/08	Vicky	 X1
E	C210561	2021/04/12	Vicky	 X2
F	C221877	2022/12/09	Ruru	 X1

△ MI2B-XXBMA-SR700I
XX: No. Of Pin




Pin Assignments Front View


UNIT: mm





TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE			N SEN, M12 B, SCREW CABLE W/O SR, M, M, FI SOLDER			
SCALE		SIZE		SHEET		OF
1:1		A4		1		1
REV.		WC-REV.		QC: Inspection item		
F		A.5				



Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	JC Chen	2020-04-17
DWG NO	CHECKED BY	DATE
 MI2B-XXBMA-SR7001	Li Feng	2020-04-17
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2020-04-17

Note:

- * RoHS Compliant
- *  Important Dimension
- *  Waterproof rate: IP67, mated
- * Connector

Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
Extension Nut: Thermoplastic, Black

- *  Nut: Metal
- *  O-Ring: Rubber, Gray
- * Clamp Ring: Thermoplastic, Black
- * Sealing Nut: Thermoplastic, Black
- * Seal: Rubber, Gray, OD: $\varnothing 4.0\text{mm} \sim \varnothing 7.0\text{mm}$
- * One set unassembled in one pe bag