


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C210025	2021/01/19	Vicky	X1
D	C210497	2021/03/30	Ruru	X2
E	C230009	2023/01/03	Vicky	X1

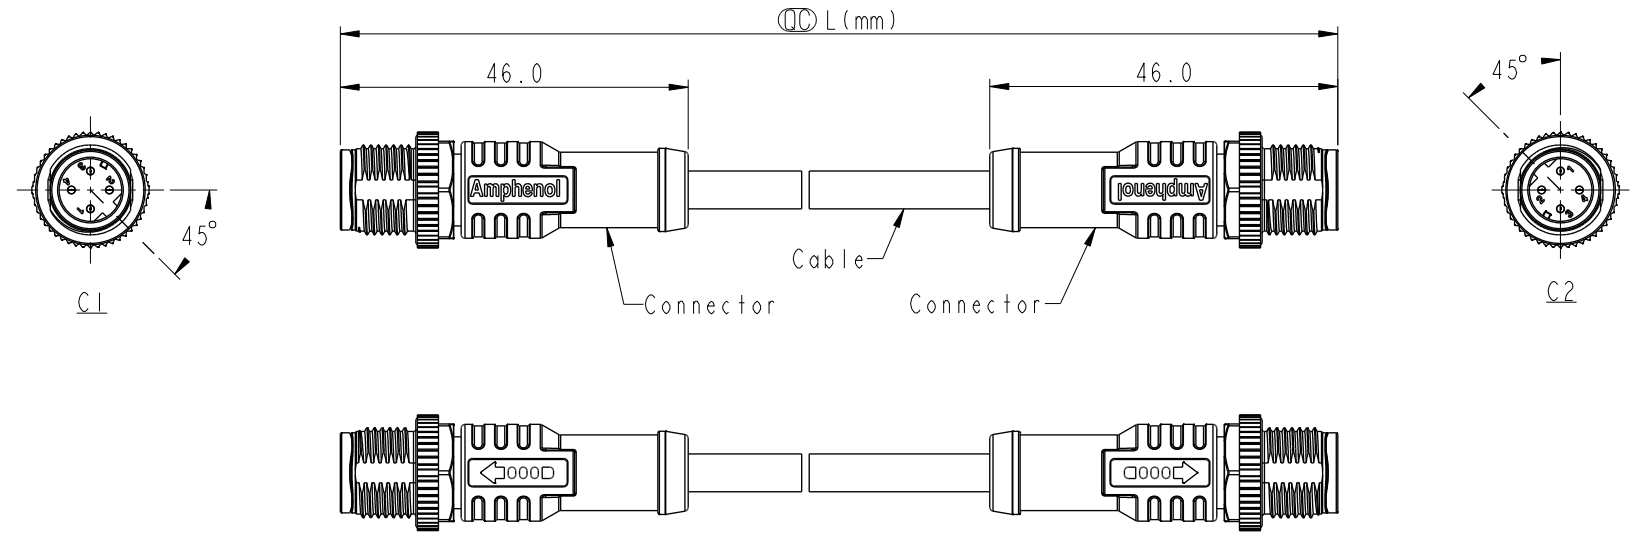

Pin Out	5	--	
	4	Black	黑
	3	Blue	藍
	2	White	白
	1	Brown	棕
	Pin #	Wire	

C1 & C2				
	①	②	③	④
	4P			
	Pin Assignments Front View			

MI2DXXML-12DML-SDXXX
 XX: No. Of Pin
 XXX: 0.5~99Meters
 A05: 0.5 Meter
 001: 1 Meter
 002: 2 Meters
 :
 099: 99 Meters

- Note:
- * RoHS Compliant
 - * Important dimension
 - * Waterproof rate: IP68, mated 1m/24h
IP69K, mated
 - * Connector:
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 Nut: Metal
 Outer mold: Thermoplastic, Black
 - * Cable: UL2517, 22#*4C, OD=4.8mm, PVC Jacket, Black
 - * Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm
 1M < L ≤ 3M: +120/-0 mm
 3M < L ≤ 5M: +160/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 20M: ±200 mm
 20M < L ≤ 30M: ±300 mm
 30M < L ≤ 99M: ±500 mm

UNIT:mm TOLERANCE ±0.5 mm	TITLE ACC, SEN, D Code, DB-ENDED MM		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY Vicky	DATE 2018-12-11
	SCALE 1:2	SIZE A4			SHEET 1	OF 1	DWG NO MI2DXXML-12DML-SDXXX
	REV. E	WC-REV. A.5	Inspection item		CUSTOMER ALTW	APPROVED BY Max	DATE 2018-12-11