




F										
E										
D										
C										
B										
A										

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/11/23	Allen Pan	Rev.01 To Rev.A
B	C210561	2021/04/13	Vicky	X4
C	C221890	2022/12/28	Vicky	X1

M12L-XXBMEB-SL7001

XX: No. Of Pin

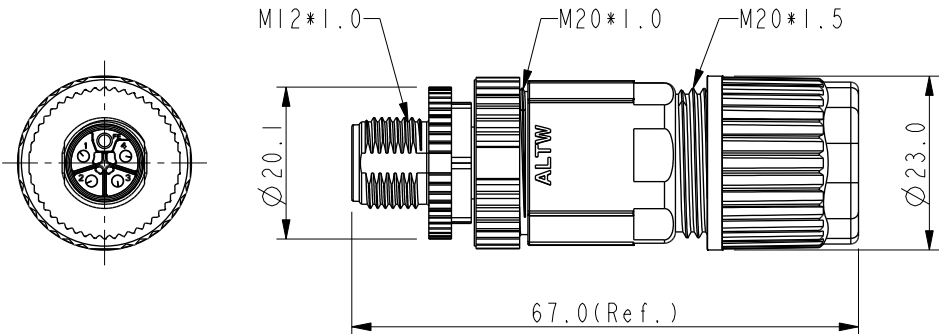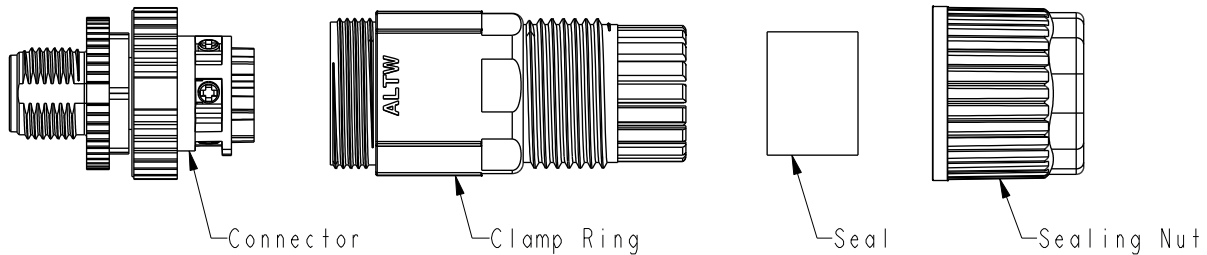

Pin Assignments  
Front View

- Note:
- \* RoHS Compliant
  - \* Important Dimension
  - \* Waterproof rate: IP67, mated
  - \* Connector
    - Housing: Thermoplastic, Black
    - Pin: Copper alloy, Gold plated
    - Extension Nut: Thermoplastic, Black
    - Nut: Metal
    - O-Ring: Rubber, Gray
  - \* Clamp Ring: Thermoplastic, Black
  - \* Sealing Nut: Thermoplastic, Black
  - \* Seal1: Rubber, Black, OD:Ø 8.0mm~Ø 10.0mm
  - \* Seal2: Rubber, Gray, OD:Ø 10.0mm~Ø 12.0mm
  - \* Seal3: Rubber, Black, OD:Ø 12.0mm~Ø 14.0mm
  - \* One set unassembled in one pe bag

UNIT:mm				TITLE N SEN, M12 L, SCREW CABLE W/O SR, M, M PWR+GND, FI SCREW IN						DRAWN BY Allen Pan				DATE 2020-11-23			
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°				SCALE 1:1		SIZE A4		SHEET 1 OF 1		DWG NO M12L-XXBMEB-SL7001				CHECKED BY Sam Ho		DATE 2020-11-23	
REV. C				WC-REV. A.1		QC: Inspection item				CUSTOMER ALTW				APPROVED BY Fred Lee		DATE 2020-11-23	

Amphenol LTW

安費諾亮泰企業股份有限公司