
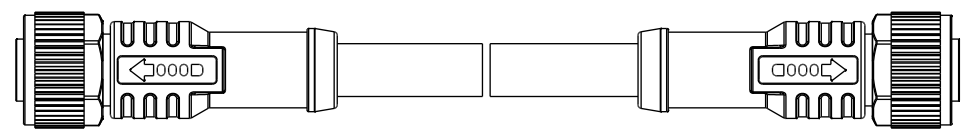


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201748	2020/11/13	Ruru	$\triangle B$ X6
C	C210229	2021/04/01	Vicky	$\triangle C$ X4
D	C230011	2023/01/05	Vicky	$\triangle D$ X1

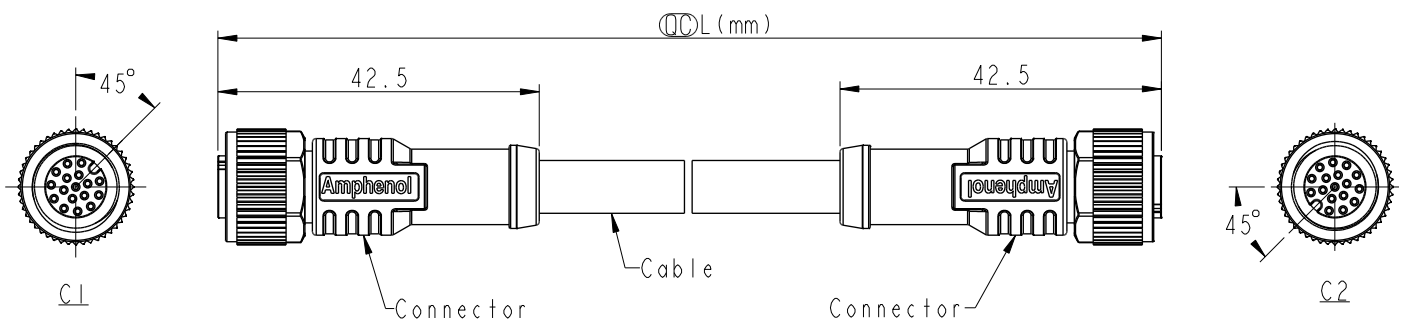

- $\triangle B$   $\triangle C$   
Note:
- \* RoHS Compliant
  - \*  $\circ$  Important dimension
  - \* Waterproof rate: IP68, mated 1m/24h  
IP69K, mated
  - \* Connector  
Housing: Thermoplastic, Black  
Pin: Copper alloy, Gold plated  
O-Ring: Rubber, Green  
Nut: Thermoplastic, Black  
Outer Mold: Thermoplastic, Black
  - \* Cable: UL20549, PUR Jacket, Black
  - \* Cable Length Tolerance:
 

0.5M < L ≤ 1M:	+60/-0 mm
1M < L ≤ 3M:	+120/-0 mm
3M < L ≤ 5M:	+160/-0 mm
5M < L ≤ 10M:	±100 mm
10M < L ≤ 20M:	±200 mm
20M < L ≤ 30M:	±300 mm
30M < L ≤ 99M:	±500 mm

UNIT: mm		TITLE	$\triangle C$
TOLERANCE	$\pm 0.5mm$	ACC, SEN, A Code, DB-ENDED FF	
SCALE	1:2	SIZE	A4
REV.	D	SHEET	1 OF 2
WC-REV.		$\circ$	Inspection item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2018-12-05
DWG NO	CHECKED BY	DATE
$\triangle B$ MSAPXXFL-SAPFL-SBXXX	Rita	2018-12-05
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2018-12-05

