


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201747	2020/11/12	Vicky	△ X3
C	C210550	2021/04/07	Vicky	△ X2
D	C221971	2022/12/21	Vicky	△ X1

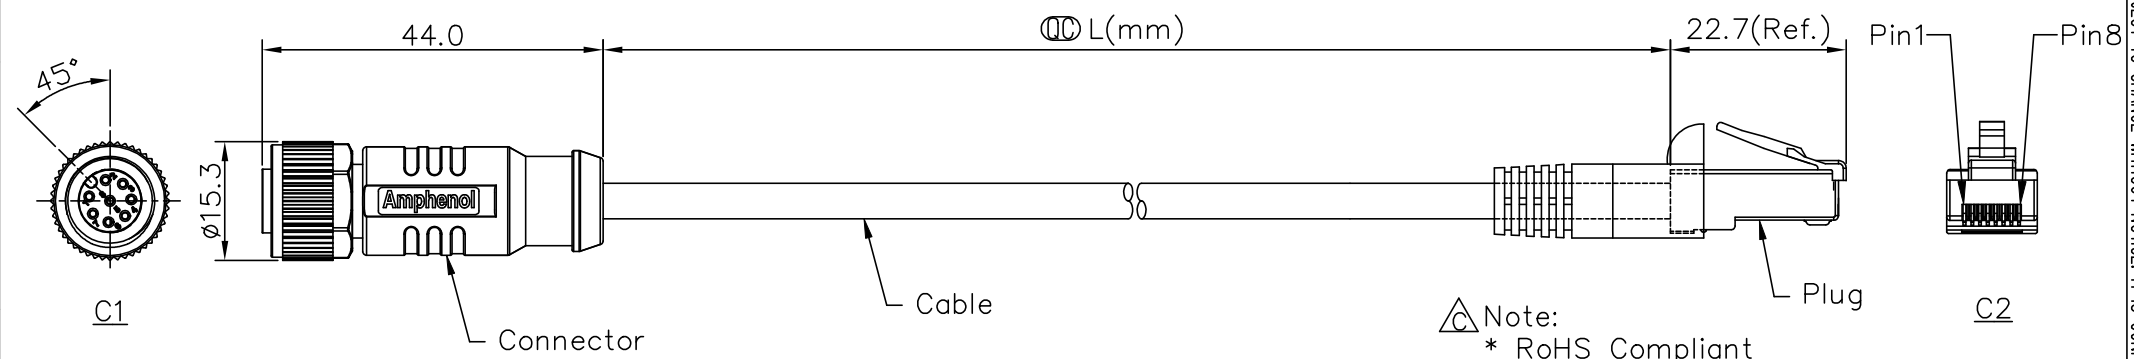

△ MSASXXFL-SPBML-SEXXX
 XX: No. Of Pin XXX: 0.5~40Meters
 A05: 0.5Meter
 001: 01Meter
 002: 02Meters
 :
 :
 040: 40Meters

- △ Note:
- * RoHS Compliant
 - * ∅ Important dimension
 - * C1
 - △ Waterproof rate: IP68, mated 1m/24h
IP69K, mated
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - O-Ring: Rubber, Gray
 - Nut: Metal
 - Shield: Metal
 - Outer mold: Thermoplastic, Black
 - * C2
 - Waterproof rate: Non-Waterproof
 - Plug: RJ45, Shielded
 - * Cable: CAT-5E, FTP, 24#*4P+AI/My+D, PVC Jacket, OD=6.5mm, Black
 - * Cable length tolerance:
- | | |
|----------------|------------|
| 0.5M < L ≤ 1M: | +60/-0 mm |
| 1M < L ≤ 3M: | +120/-0 mm |
| 3M < L ≤ 5M: | +160/-0 mm |
| 5M < L ≤ 10M: | ±100 mm |
| 10M < L ≤ 20M: | ±200 mm |
| 20M < L ≤ 30M: | ±300 mm |
| 30M < L ≤ 40M: | ±500 mm |

Shield	Drain	地線	Shield	
3	Brown	棕	8	Twist
2	White/Brown	白/棕	7	
8	Green	綠	6	Twist
5	White/Green	白/綠	3	
7	Blue	藍	4	Twist
1	White/Blue	白/藍	5	
4	Orange	橘	2	Twist
6	White/Orange	白/橘	1	
C1	Wire Color		C2	



UNIT:mm	TOLERANCE	±0.5 mm
TITLE ACC, SEN, A Code, DB-ENDED FM		
SCALE	Free	SHEET 1 OF 1
REV. D	SIZE A4	◎: Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Allen Pan	DATE 2020-04-30
DWG NO △ MSASXXFL-SPBML-SEXXX	CHECKED BY Sam Ho	DATE 2020-04-30
CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2020-04-30