
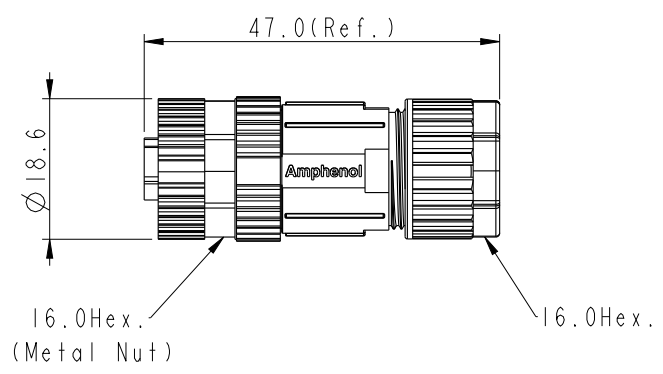

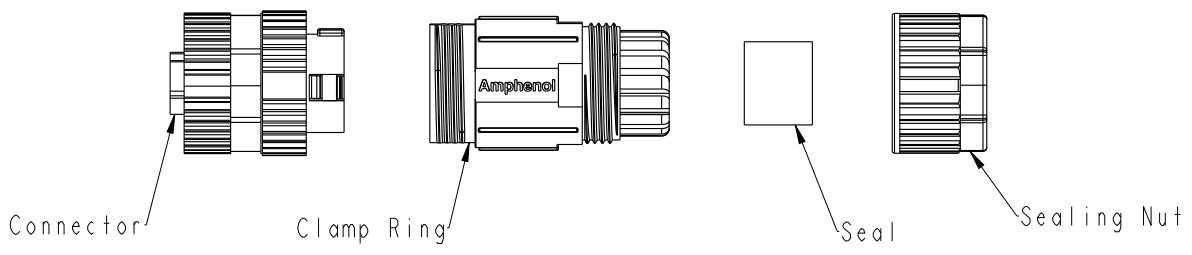


| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
|------|---------|------------|----------|-------------|
| B | C200027 | 2020/01/08 | Xiaofeng | △B XI |
| C | C200426 | 2020/04/08 | Xiaofeng | △C XI |

F
E
D
C
B
A

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

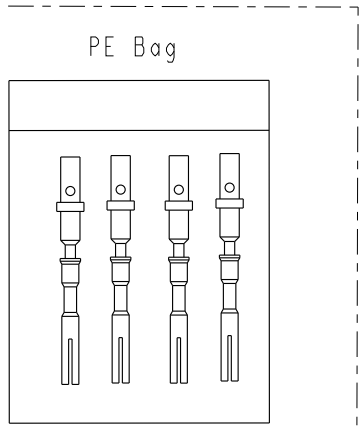

- Note:
- * (C) Important Dimension To Check.
 - * IP: IP67.
 - * Housing: Thermoplastic, Black.
 - * Female Pin: Copper Alloy, Gold Plated.
 - * O-Ring: Silicone, Grey.
 - * Clamp Ring: Thermoplastic, Black.
 - * Sealing Nut: Thermoplastic, Black.
 - * Seal For Cable OD: $\varnothing 4.0\text{mm} \sim \varnothing 8.0\text{mm}$
 - * Applicable Wire gauge (Stranded wire cross section) 20AWG ~ 24AWG
 - * Mating Recommended tightening torque: 3~4 kgf.cm / 0.29~0.39 N.m
 - * Sealing-Nut Recommended tightening torque: 4~6 kgf.cm / 0.39~0.59 N.m
 - * Detailed applicable wire specifications may vary depending on the actual wire construction.

| | | |
|-----------|--|--|
| UNIT:mm | | |
| TOLERANCE | | |
| ±0.5mm | | |

| | | | |
|---------------------------------------|---------|---------------------|----|
| TITLE | | | |
| M12 D-Code Assy 4PIN F Conn. F Pin | | | |
| SCALE | SIZE | SHEET | OF |
| Free | A4 | 1 | 1 |
| REV. | WC-REV. | QC: Inspection item | |
| C | .0 | | |

Amphenol LTW
安費諾亮泰企業股份有限公司

| | | | | | |
|----------|--------------------|-------------|----------|------|------------|
| ITEM NO | MSDP-04BFFC-SL7001 | DRAWN BY | Xiaofeng | DATE | 2019/12/17 |
| DWG NO | MSDP-04BFFC-SL7001 | CHECKED BY | Li-Feng | DATE | 2019/12/17 |
| CUSTOMER | ALTW | APPROVED BY | Jerry | DATE | 2019/12/17 |