


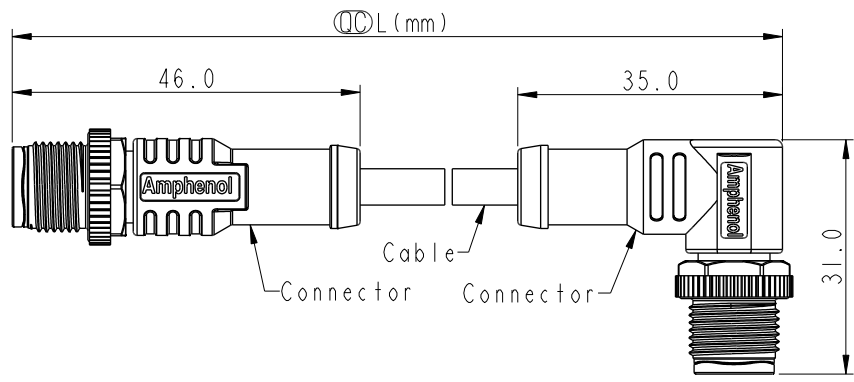


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201809	2020/11/20	Vicky	\triangle_B X3
C	C210237	2021/03/29	Ruru	\triangle_C X2
D	C230014	2022/12/30	Ruru	\triangle_D X1

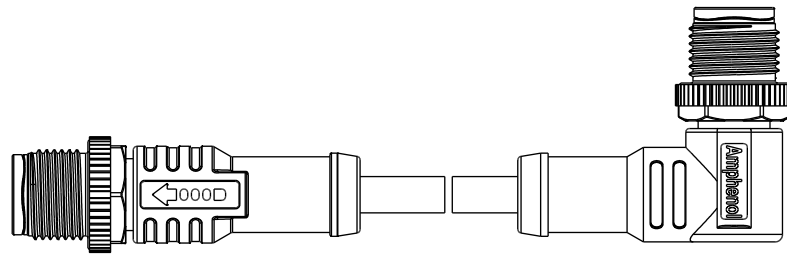

\triangle_B MSDPXML-SDPMR-SBXXX
 XX: No. Of Pin
 XXX: 0.5~99Meters
 A05: 0.5 Meter
 001: 1 Meter
 002: 2 Meters
 :
 099: 99 Meters

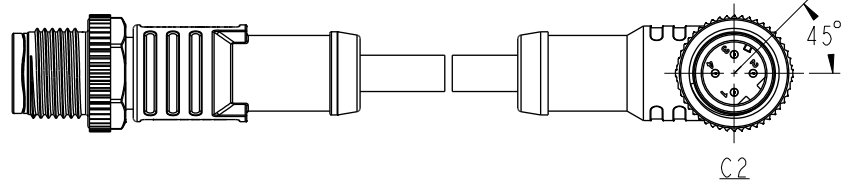

Note: \triangle_B \triangle_C
 * RoHS Compliant
 * \circledast Important dimension
 * C1
 \triangle_D Waterproof rate: IP68, mated 1m/24h
 IP69K, mated
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 Nut: Thermoplastic, Black
 Outer mold: Thermoplastic, Black
 * C2
 \triangle_D Waterproof rate: IP68, mated 1m/24h
 IP69K, mated
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 Nut: Thermoplastic, Black
 Outer mold: Thermoplastic, Black
 * Cable: UL20549, 22#*4C, OD=4.0mm, PUR Jacket, Black
 * Cable length tolerance:
 0.5M < L ≤ 1M: +60/-0 mm
 1M < L ≤ 3M: +120/-0 mm
 3M < L ≤ 5M: +160/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 20M: ±200 mm
 20M < L ≤ 30M: ±300 mm
 30M < L ≤ 99M: ±500 mm

Pin Out	5	--	
	4	Black	黑
	3	Blue	藍
	2	White	白
	1	Brown	棕
	Pin #	Wire	
C2			4P
C1			4P

UNIT:mm		
TOLERANCE		± 0.5 mm

TITLE ACC, SEN, D Code, DB-ENDED MM \triangle_C			
SCALE 1:2	SIZE A4	SHEET 1	OF 1
REV. D	WC-REV. A.5	\circledast : Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Ruru	DATE 2018-12-12
DWG NO. \triangle_B MSDPXML-SDPMR-SBXXX	CHECKED BY Rita	DATE 2018-12-12
CUSTOMER ALTW	APPROVED BY Max	DATE 2018-12-12