
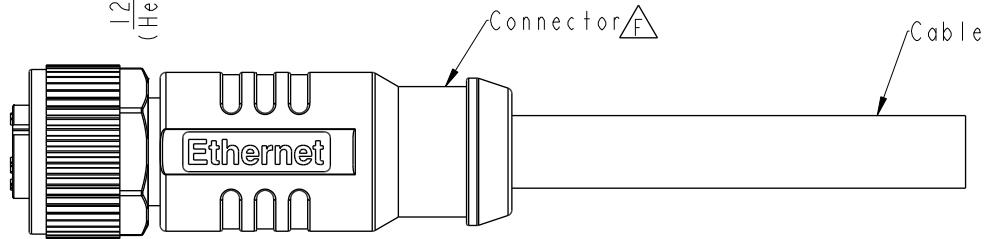

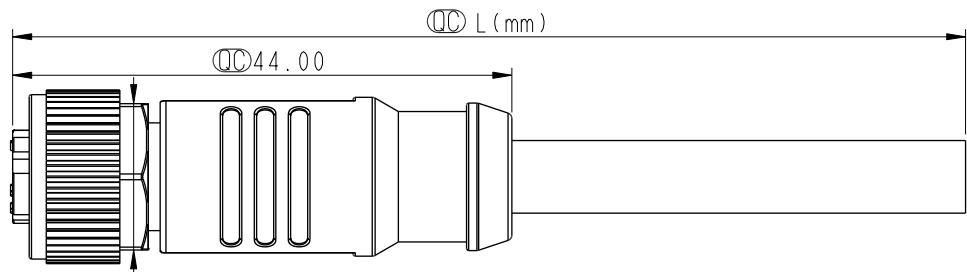


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
E	C220704	2022/05/17	Leon	△E X2
F	C222007	2022/12/28	Ruru	△F X3
G	C230039	2023/01/10	Jiahe Lin	△G X3

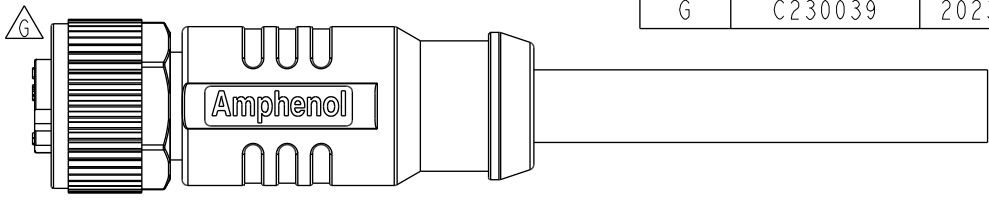

△D MSDS-XXBFFM-SL8EXX

XX: No. Of Pin

XX: 01~99Meters
 01: 01Meter
 02: 02Meters
 .
 99: 99Meters

△D

Note:


* △C Important Dimension.
 * △F Waterproof rate: IP68, mated 1m/24h, IP69K mated

* Connector:

Housing: Thermoplastic, Black.
 Pin: Copper Alloy, Gold Plated.
 Nut: Metal.
 Outer Mold: Thermoplastic, Black.

△G

* Cable: CAT-5E, 24#*2P+AL/MY+B+F, OD=6.4mm, TPU Jacket, Blue
 * Cable Length Tolerance: 1M+50/-0 mm
 1M<L≤3M:+100/-0 mm
 3M<L≤5M:+150/-0 mm
 5M<L≤10M:±100 mm
 10M<L≤20M:±200 mm
 20M<L≤30M:±300 mm
 30M<L≤99M:±500 mm




4P

Shield	Braid	Wire Color	Pin Out
4	Green	綠	Twist
2	White/Green	白/綠	Twist
3	Orange	橘	Twist
1	White/Orange	白/橘	Twist
Connector	Wire Color		

Pin Assignments Front View

UNIT:mm
 TOLERANCE
 ±0.5mm



TITLE N SEN, M12 D -SHLD, SCREW CABLE W/O SR, F, F, MOLDING			
SCALE 3:2	SIZE A4	SHEET 1 OF 1	
REV. G	WC-REV. A.3	△C: Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Leon	DATE 2021/03/16
DWG NO △D MSDS-XXBFFM-SL8EXX	CHECKED BY Wen	DATE 2021/03/16
CUSTOMER ALTW	APPROVED BY Neo	DATE 2021/03/16