

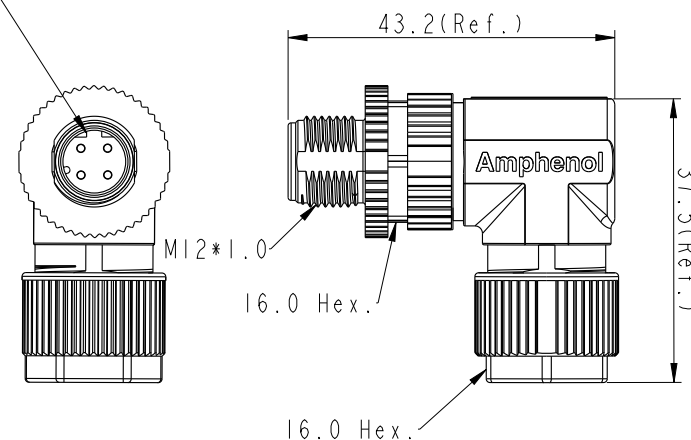
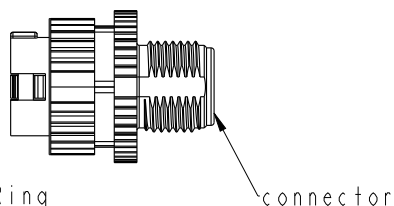
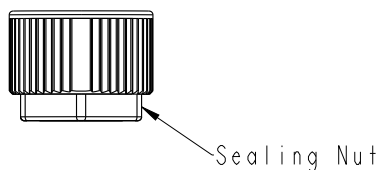

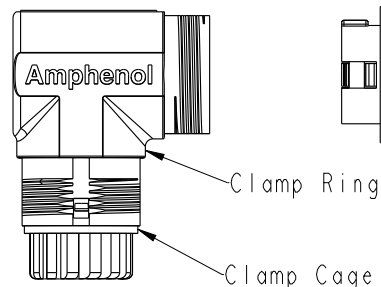


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2019/08/09	Xiaofeng	Initial Release
B	C200426	2020/04/08	Xiaofeng	△B XI

360 Adjustable Key Code Direction

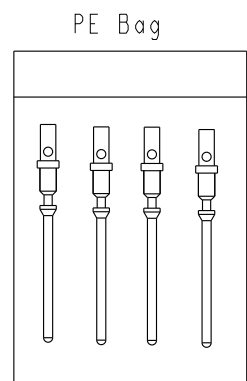

Pin Assignments
Front View

Note:

- * IP: IP67.
- * Housing: Thermoplastic, Black.
- * Male Pin: Copper Alloy, Gold Plated.
- * O-Ring: Silicone, Grey.
- * Clamp Ring: Zinc Alloy, Nickel Plated.
- * Sealing Nut: Zinc Alloy, Nickel Plated.
- * Seal For Cable OD: $\varnothing 4.0\text{mm} \sim \varnothing 7.0\text{mm}$
- * Applicable Wire gauge (Stranded wire cross section) 20AWG-24AWG
- * Mating Recommended tightening torque:
3~4 kgf.cm / 0.29~0.39 N.m
- * Sealing-Nut Recommended tightening torque:
4~6 kgf.cm / 0.39~0.59 N.m
- * Detailed applicable wire specifications may vary depending on the actual wire construction.

UNIT:mm	
TOLERANCE	± 0.5

TITLE M12 Shielded Assy 4PIN M Conn. M Pin			
SCALE Free	SIZE A4	SHEET 1	OF 1
REV. B	WC-REV. .0	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO MSDS-04BMMC-SR7001	DRAWN BY Xiaofeng	DATE 2019/08/09
DWG NO MSDS-04BMMC-SR7001	CHECKED BY Li-Feng	DATE 2019/08/09
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2019/08/09

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.