


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C210084	2021/01/18	Vicky	$\triangle C$ X1
D	C210237	2021/03/29	Ruru	$\triangle D$ X2
E	C222007	2022/12/28	Ruru	$\triangle E$ X1

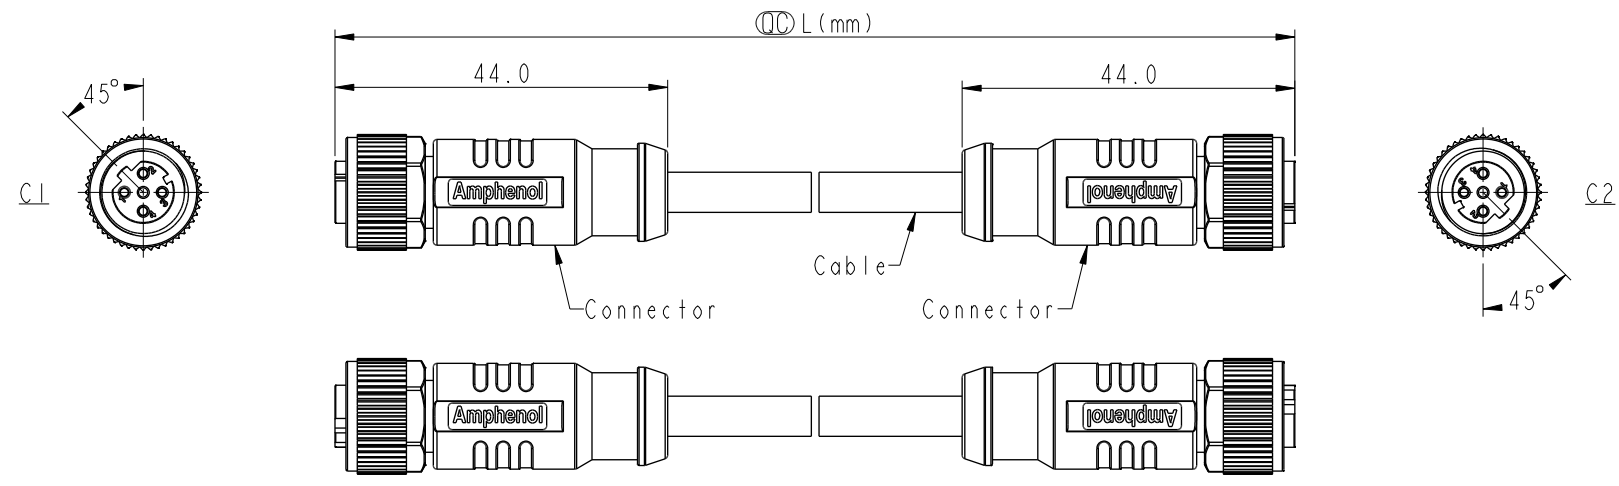

Pin Out	5	Shield	
	4	Black	黑
	3	Blue	藍
	2	White	白
	1	Brown	棕
	Pin #	Wire	
C1 & C2			
	4P		

$\triangle B$  MSDSXXFL-SDSFL-SDXXX  
 XX: No. Of Pin  
 XXX: 0.5~99Meters  
 A05: 0.5 Meter  
 001: 1 Meter  
 002: 2 Meters  
 :  
 099: 99 Meters

- Note:  $\triangle B$   $\triangle C$   $\triangle D$
- \* RoHS Compliant
  - \*  $\text{\textcircled{C}}$  Important dimension
  - $\triangle E$  \* Waterproof rate: IP68, mated 1m/24h IP69K, mated
  - \* Connector:
    - Housing: Thermoplastic, Black
    - Pin: Copper alloy, Gold plated
    - O-Ring: Rubber, Gray
    - Nut: Metal
    - Shield: Metal
    - Outer mold: Thermoplastic, Black
  - \* Cable: UL2517, Shield, 22#\*4C+AL/MY+B, OD=5.3mm, PVC Jacket, Black
  - \* Cable length tolerance:
    - 0.5M < L ≤ 1M: +60/-0 mm
    - 1M < L ≤ 3M: +120/-0 mm
    - 3M < L ≤ 5M: +160/-0 mm
    - 5M < L ≤ 10M: ±100 mm
    - 10M < L ≤ 20M: ±200 mm
    - 20M < L ≤ 30M: ±300 mm
    - 30M < L ≤ 99M: ±500 mm

UNIT:mm TOLERANCE ±0.5 mm	TITLE ACC, SEN, D Code, DB-ENDED FF		<h1>Amphenol LTW</h1> <p>安費諾亮泰企業股份有限公司</p>	ITEM NO	DRAWN BY Brady	DATE 2019-01-24		
	SCALE 1:2	SIZE A4		SHEET 1	OF 1	DWG NO $\triangle B$ MSDSXXFL-SDSFL-SDXXX	CHECKED BY Eagle	DATE 2019-01-24
	REV. E	WC-REV. A.5		$\text{\textcircled{C}}$ : Inspection item		CUSTOMER ALTW	APPROVED BY Neo	DATE 2019-01-24