



REV	ECN NO	DATE	SIGN	DESCRIPTION
D	C201809	2020-11-23	Vicky	△Dx3
E	C210237	2021-03-30	Ruru	△Ex2
F	C221951	2022-12-16	Ruru	△Fx1

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

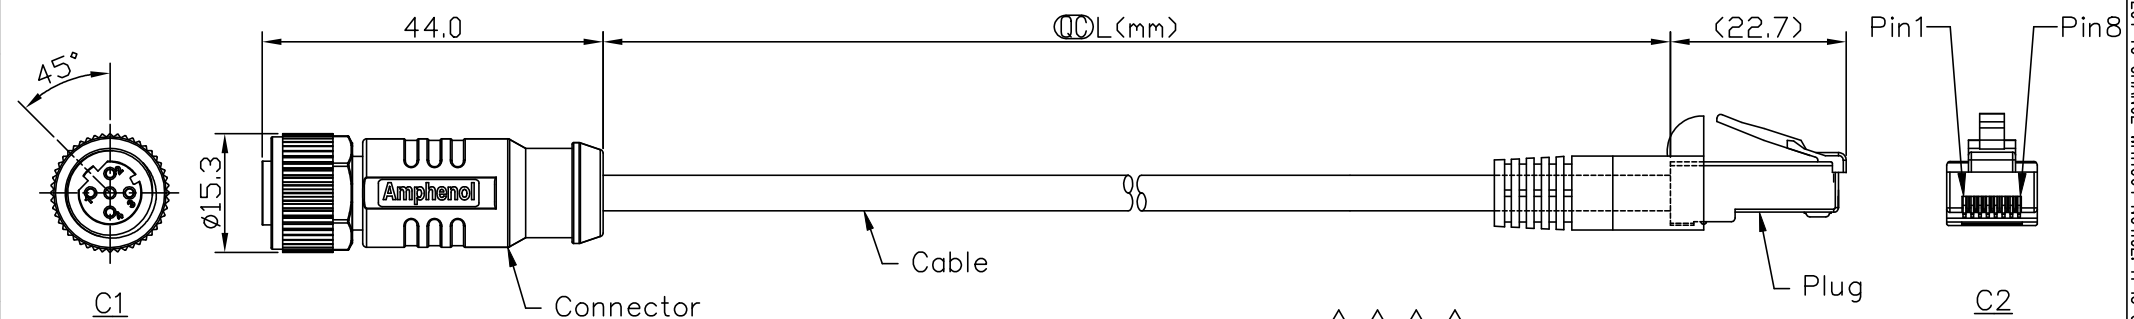

Note: △B△C△D△E
 * RoHS Compliant
 * ∅ Important dimension
 * C1
 △F Waterproof rate: IP68, mated 1m/24h
 IP69K, mated
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 O-Ring: Rubber, Gray
 Nut: Metal
 Shield: Metal
 Outer mold: Thermoplastic, Black
 * C2
 Waterproof rate: Non-Waterproof
 Plug: RJ45, Shielded
 * Cable: CAT-5E, FTP, 22#*2P+Al/MY+D, OD=6.2mm, PU Jacket, Black
 * Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm
 1M < L ≤ 3M: +120/-0 mm
 3M < L ≤ 5M: +160/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 20M: ±200 mm
 20M < L ≤ 30M: ±300 mm
 30M < L ≤ 40M: ±500 mm

△D MSDSXXFL-SPBML-SEXXX
 XX: No. Of Pin
 XXX: 0.5~40Meters
 A05: 0.5Meter
 001: 01Meter
 002: 02Meters
 :
 :
 040: 40Meters

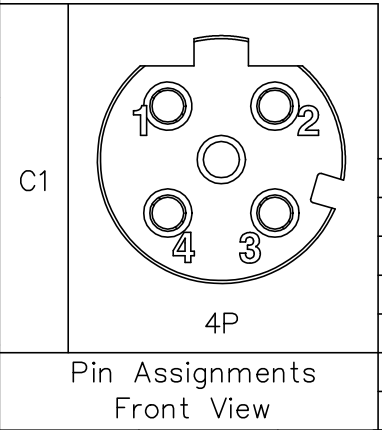

Shield	Drain	地線	Shield	
4	Green	綠	6	Twist
2	White/Green	白/綠	3	
3	Orange	橘	2	Twist
1	White/Orange	白/橘	1	
C1	Wire Color		C2	
Pin Out				

UNIT: mm	TOLERANCE ±0.5 mm	TITLE ACC, SEN, D Code, DB-ENDED FM	SCALE Free	SHEET 1 OF 1	REV. F	SIZE A4	∅: Inspection Item	Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DWG NO △D MSDSXXFL-SPBML-SEXXX	CUSTOMER ALTW	DRAWN BY Allen Pan	CHECKED BY Sam Ho	APPROVED BY Fred Lee	DATE 2020-05-11	DATE 2020-05-11	DATE 2020-05-11
----------	----------------------	--	---------------	-----------------	-----------	------------	--------------------	--------------------------------------	---------	-----------------------------------	------------------	-----------------------	----------------------	-------------------------	--------------------	--------------------	--------------------