



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C201786	2020-11-16	Ruru	$\triangle D$ x3
E	C210237	2021-03-30	Ruru	$\triangle E$ x1
F	C221951	2022-12-16	Ruru	$\triangle F$ x1

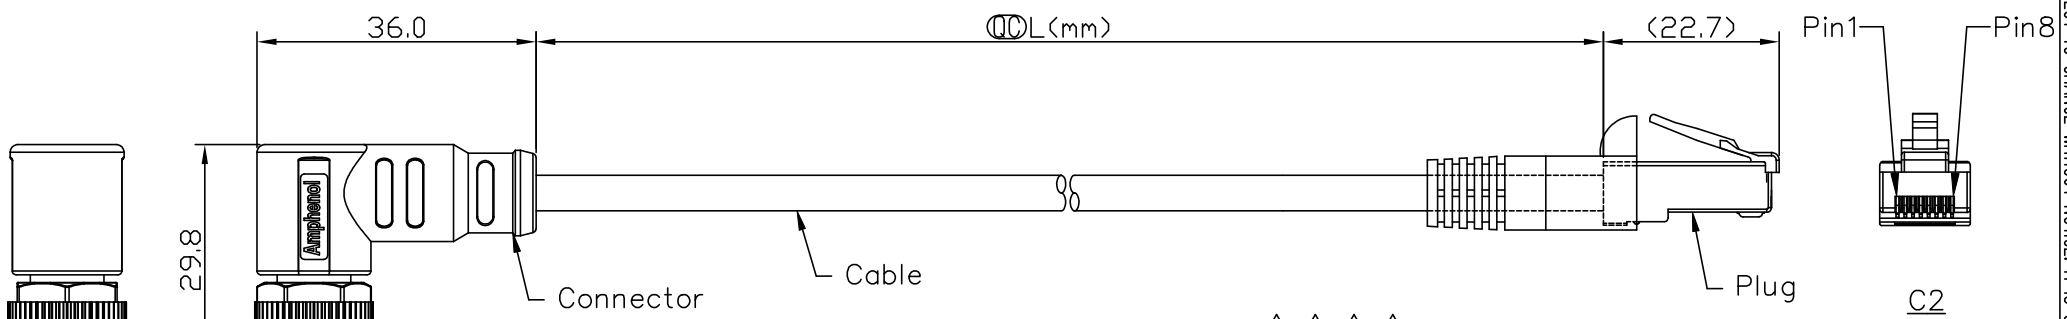

- Note: $\triangle B$ $\triangle C$ $\triangle D$ $\triangle E$
- * RoHS Compliant
 - * \odot Important dimension
 - * C1
 - $\triangle E$ Waterproof rate: IP68, mated 1m/24h
IP69K, mated
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - O-Ring: Rubber, Gray
 - Nut: Metal
 - Shield: Metal
 - Outer mold: Thermoplastic, Black
 - * C2
 - Waterproof rate: Non-Waterproof
 - Plug: RJ45, Shielded
 - * Cable: CAT-5E, FTP, 22#*2P+AI/MY+D, OD=6.2mm, PU Jacket, Black
 - * Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm
1M < L ≤ 3M: +120/-0 mm
3M < L ≤ 5M: +160/-0 mm
5M < L ≤ 10M: ±100 mm
10M < L ≤ 20M: ±200 mm
20M < L ≤ 30M: ±300 mm
30M < L ≤ 40M: ±500 mm

$\triangle D$ MSDSXXFR-SPBML-SEXXX
 XX: No. Of Pin
 XXX: 0.5~40Meters
 A05: 0.5Meter
 001: 01Meter
 002: 02Meters
 :
 :
 040: 40Meters



	$\triangle B$	$\triangle C$	$\triangle B$	$\triangle C$	
Shield	Drain	地線	Shield		
4	Green	綠	6		Twist
2	White/Green	白/綠	3		
3	Orange	橘	2		Twist
1	White/Orange	白/橘	1		
C1	Wire Color		C2		
	Pin Out				

UNIT: mm	
TOLERANCE	±0.5 mm

TITLE ACC, SEN, D Code, DB-ENDED FM	
SCALE Free	SHEET 1 OF 1
REV. F	SIZE A4
◎: Inspection Item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	$\triangle D$ MSDSXXFR-SPBML-SEXXX
CUSTOMER	ALTW

DRAWN BY Allen Pan	DATE 2020-05-11
CHECKED BY Sam Ho	DATE 2020-05-11
APPROVED BY Fred Lee	DATE 2020-05-11

DATE 2020-05-11
DATE 2020-05-11
DATE 2020-05-11