



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C201786	2020-11-17	Ruru	△D x3
E	C210237	2021-03-30	Ruru	△E x1
F	C221951	2022-12-16	Ruru	△F x1

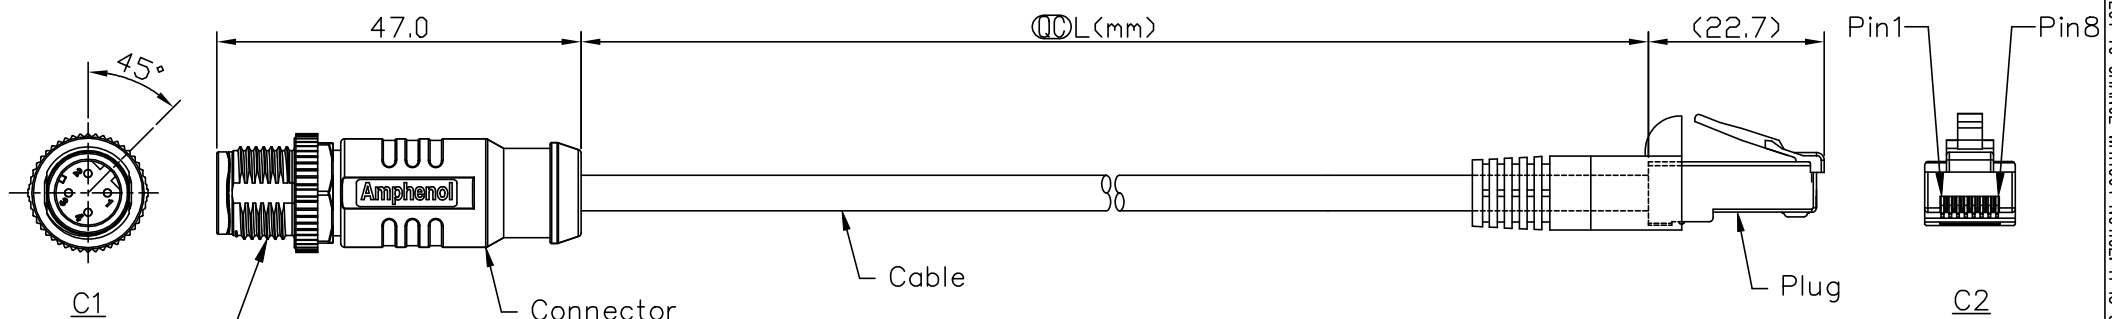

MSDSXXML-SPBML-SEXXX
 XX: No. Of Pin
 XXX: 0.5~40Meters
 A05: 0.5Meter
 001: 01Meter
 002: 02Meters
 ...
 040: 40Meters

Note: △B △C △D △E
 * RoHS Compliant
 * ∅ Important dimension
 * C1
 △F Waterproof rate: IP68, mated 1m/24h
 IP69K, mated
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 Nut: Metal
 Shield: Metal
 Outer mold: Thermoplastic, Black
 * C2
 Waterproof rate: Non-Waterproof
 Plug: RJ45, Shielded
 * Cable: CAT-5E, FTP, 22#*2P+AI/MY+D, OD=6.2mm, PU Jacket, Black
 * Cable length tolerance: 0.5M <math>< L \le 1M: +60/-0 mm</math>
 1M <math>< L \le 3M: +120/-0 mm</math>
 3M <math>< L \le 5M: +160/-0 mm</math>
 5M <math>< L \le 10M: \pm 100 mm</math>
 10M <math>< L \le 20M: \pm 200 mm</math>
 20M <math>< L \le 30M: \pm 300 mm</math>
 30M <math>< L \le 40M: \pm 500 mm</math>

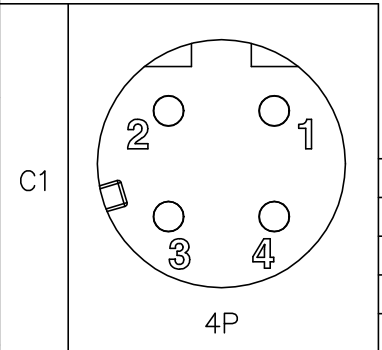

Shield	Drain	地線	Shield	
4	Green	綠	6	Twist
2	White/Green	白/綠	3	
3	Orange	橘	2	Twist
1	White/Orange	白/橘	1	
C1	Wire Color		C2	

UNIT:mm	TOLERANCE ±0.5 mm	TITLE ACC, SEN, D Code, DB-ENDED MM	<h1>Amphenol LTW</h1> <p>安費諾亮泰企業股份有限公司</p>		ITEM NO	DRAWN BY Allen Pan	DATE 2020-05-11
		SCALE Free	SHEET 1 OF 1		DWG NO △ MSDSXXML-SPBML-SEXXX	CHECKED BY Sam Ho	DATE 2020-05-11
		REV. F	SIZE A4	◎ : Inspection Item	CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2020-05-11

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.