



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV	ECN NO	DATE	SIGN	DESCRIPTION
D	C201786	2020-11-17	Ruru	△Dx3
E	C210237	2021-03-30	Ruru	△Ex1
F	C221951	2022-12-16	Ruru	△Fx1

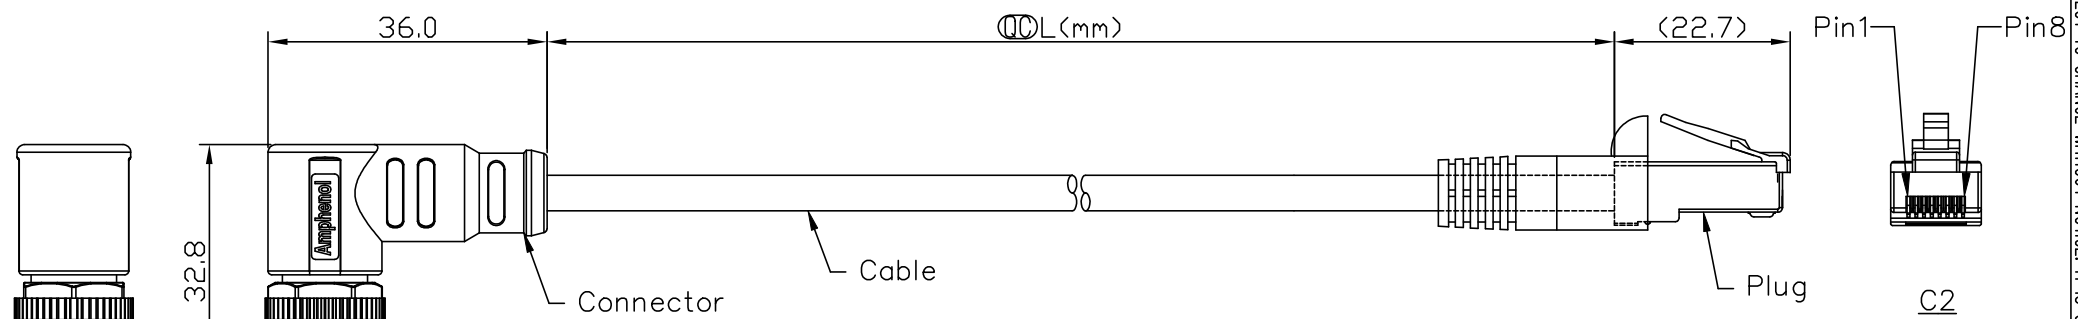


M12\*1.0  
32.8



△ MSDSXXMR-SPBML-SEXXX  
 XX: No. Of Pin  
 XXX: 0.5~40Meters  
 A05: 0.5Meter  
 001: 01Meter  
 002: 02Meters  
 :  
 :  
 040: 40Meters

Note: △B △C △D △E  
 \* RoHS Compliant  
 \* ∅ Important dimension  
 \* C1  
 △E Waterproof rate: IP68, mated 1m/24h  
 IP69K, mated  
 Housing: Thermoplastic, Black  
 Pin: Copper alloy, Gold plated  
 Nut: Metal  
 Shield: Metal  
 Outer mold: Thermoplastic, Black  
 \* C2  
 Waterproof rate: Non-Waterproof  
 Plug: RJ45, Shielded  
 \* Cable: CAT-5E, FTP, 22#\*2P+AI/MY+D, OD=6.2mm, PU Jacket, Black  
 \* Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm  
 1M < L ≤ 3M: +120/-0 mm  
 3M < L ≤ 5M: +160/-0 mm  
 5M < L ≤ 10M: ±100 mm  
 10M < L ≤ 20M: ±200 mm  
 20M < L ≤ 30M: ±300 mm  
 30M < L ≤ 40M: ±500 mm

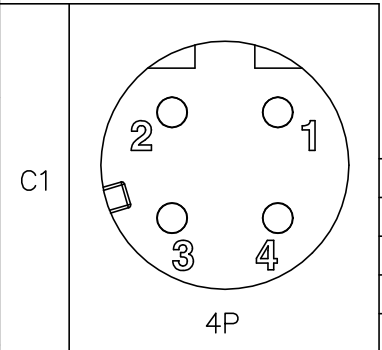

Shield	Drain	地線	Shield	
4	Green	綠	6	Twist
2	White/Green	白/綠	3	
3	Orange	橘	2	Twist
1	White/Orange	白/橘	1	
C1	Wire Color		C2	

UNIT: mm  
 TOLERANCE  
 ±0.5 mm

TITLE  
 ACC, SEN, D Code, DB-ENDED  
 MM  
 SCALE Free  
 SHEET 1 OF 1  
 REV. F  
 SIZE A4  
 ∅: Inspection Item

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO  
 DWG NO  
 △ MSDSXXMR-SPBML-SEXXX  
 CUSTOMER  
 ALTW

DRAWN BY  
 Allen Pan  
 CHECKED BY  
 Sam Ho  
 APPROVED BY  
 Fred Lee

DATE  
 2020-05-11  
 DATE  
 2020-05-11  
 DATE  
 2020-05-11