


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2021-06-01	Sam Ho	Rev.02 to A, Initial Released
B	C221951	2022-12-19	Ruru	$\triangle B$ X2

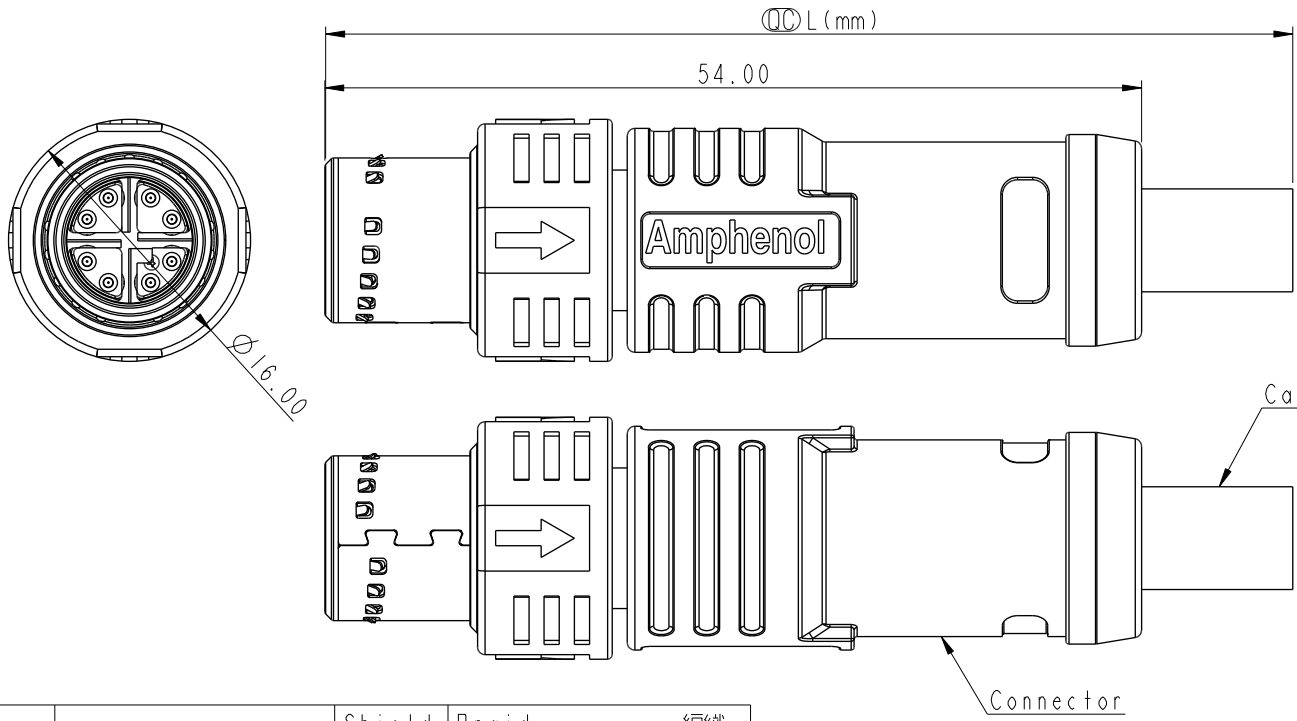

MSXS-XXBMMM-PL8XXX

XX: 01~99Meters
 01: 01Meter
 02: 02Meters
 :
 99: 99Meters

XX: No. Of Pin

- Note:
- * \varnothing Important Dimension
 - * $\triangle B$ Waterproof Rate: IP68, Mated 1m/24h
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper Alloy, Gold Plated
 - Shield & Shell & Spring: Metal
 - Nut: Thermoplastic, Black
 - Outer Mold: Thermoplastic, Black
 - * Cable: CAT-6A, 26#*4P+AL/MY+B, TPU Jacket, OD 6.8mm, GN.
 - * Cable Length Tolerance:
 - 1M < L ≤ 3M: +100/-0 mm
 - 3M < L ≤ 5M: +150/-0 mm
 - 5M < L ≤ 10M: ±100 mm
 - 10M < L ≤ 20M: ±200 mm
 - 20M < L ≤ 30M: ±300 mm
 - 30M < L ≤ 99M: ±500 mm

Shield	Braid	編織	
8	Blue	藍	Twist
7	White/Blue	白/藍	
6	Brown	棕	Twist
5	White/Brown	白/棕	
4	Green	綠	Twist
3	White/Green	白/綠	
2	Orange	橘	Twist
1	White/Orange	白/橘	
Conn.	Wire Color		
Pin Assignment Front View		Pin Out	

UNIT:mm	\varnothing	∇	TITLE
TOLERANCE			N SEN, M12 X -SHLD, PUSH PULL CABLE W/O SR, M, M, MOLDING $\triangle B$
±0.50mm			SCALE 2:1 SIZE A4 SHEET 1 OF 1
REV. B	WC-REV.	\varnothing Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Sam Ho	2021-04-09
DWG NO	CHECKED BY	DATE
MSXS-XXBMMM-PL8XXX	Fred Lee	2021-04-09
CUSTOMER	APPROVED BY	DATE
ALTW	Fred Lee	2021-04-09