



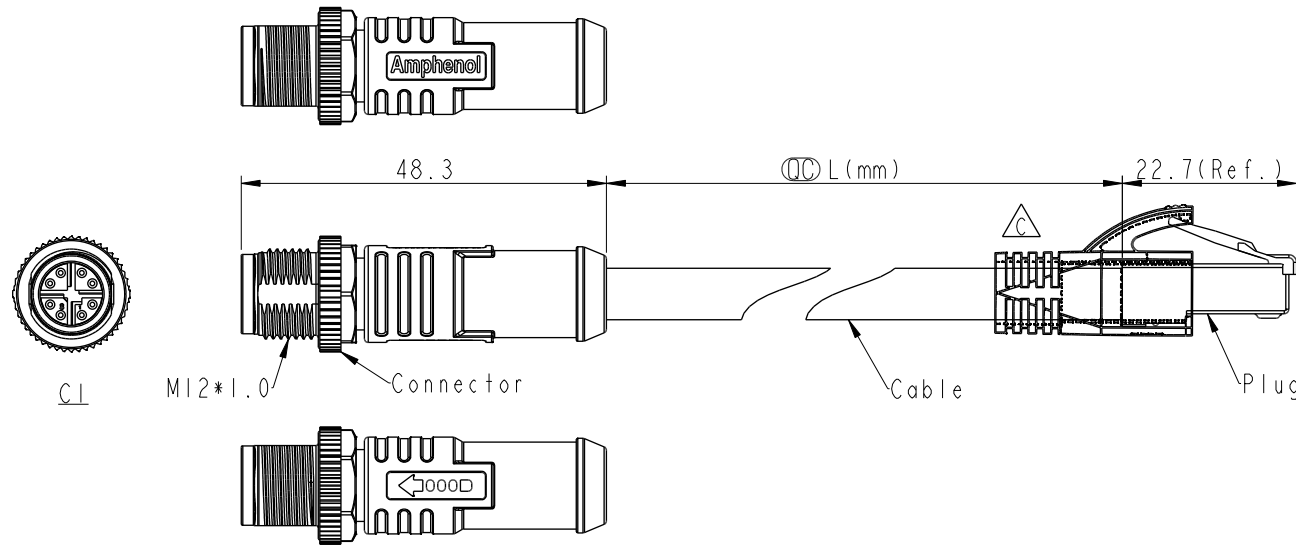


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C210337	2021/03/08	Vicky	Old Item No. MSXSXXML-SPBML-SGXXX
C	C220546	2022/03/31	Arvin Chan	 X3
D	C221951	2022/12/19	Ruru	 X1



Note:

- * RoHS Compliant
- *  Important Dimension.
- * C1
-  Waterproof rate: IP67, mated Housing: Thermoplastic, Black Pin: Copper alloy, Gold plated Nut: Metal Outer mold: Thermoplastic, Black
- * C2
- Waterproof Rate: Non-Waterproof Plug: RJ45, Shielded
- *  Cable: CAT-6A, 26#*4P+AL/MY+B TPU Jacket, OD=6.8, Green.
- * Cable Length Tolerance:
 - 0.5M< L ≤ 1M: +60/-0 mm
 - 1M< L ≤ 3M: +120/-0 mm
 - 3M< L ≤ 5M: +160/-0 mm
 - 5M< L ≤ 10M: ±100 mm
 - 10M< L ≤ 20M: ±200 mm
 - 20M< L ≤ 30M: ±300 mm
 - 30M< L ≤ 40M: ±500 mm





C1
Pin Assignments
Front View

Shield	Braid	編號	Shield	
6	Brown	棕	8	Twist
5	White/Brown	白/棕	7	Twist
4	Green	綠	6	Twist
3	White/Green	白/綠	3	Twist
8	Blue	藍	4	Twist
7	White/Blue	白/藍	5	Twist
2	Orange	橘	2	Twist
1	White/Orange	白/橘	1	
C1	Wire Color		C2	

Pin Out

MSXSXXML-SPBML-SXXXX
XX: No. Of Pin

XXX: 0.5~40Meters
A05: 0.5Meter
001: 01Meter
002: 02Meter
:
040: 40Meters

UNIT:mm		TITLE	ACC, SEN, X Code, DB-ENDED
TOLERANCE	±0.5 mm	SCALE	Free
		SIZE	A4
		SHEET	1 OF 1
		REV.	D
		WC-REV.	A.1
			Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO	CHECKED BY	DATE
	MSXSXXML-SPBML-SXXXX	Rita	2021-02-23
CUSTOMER	ALTW	APPROVED BY	DATE
		Max	2021-02-23