




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1720086~089	2017/02/09	Ruru	Change Logo & Outer Mold Design & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

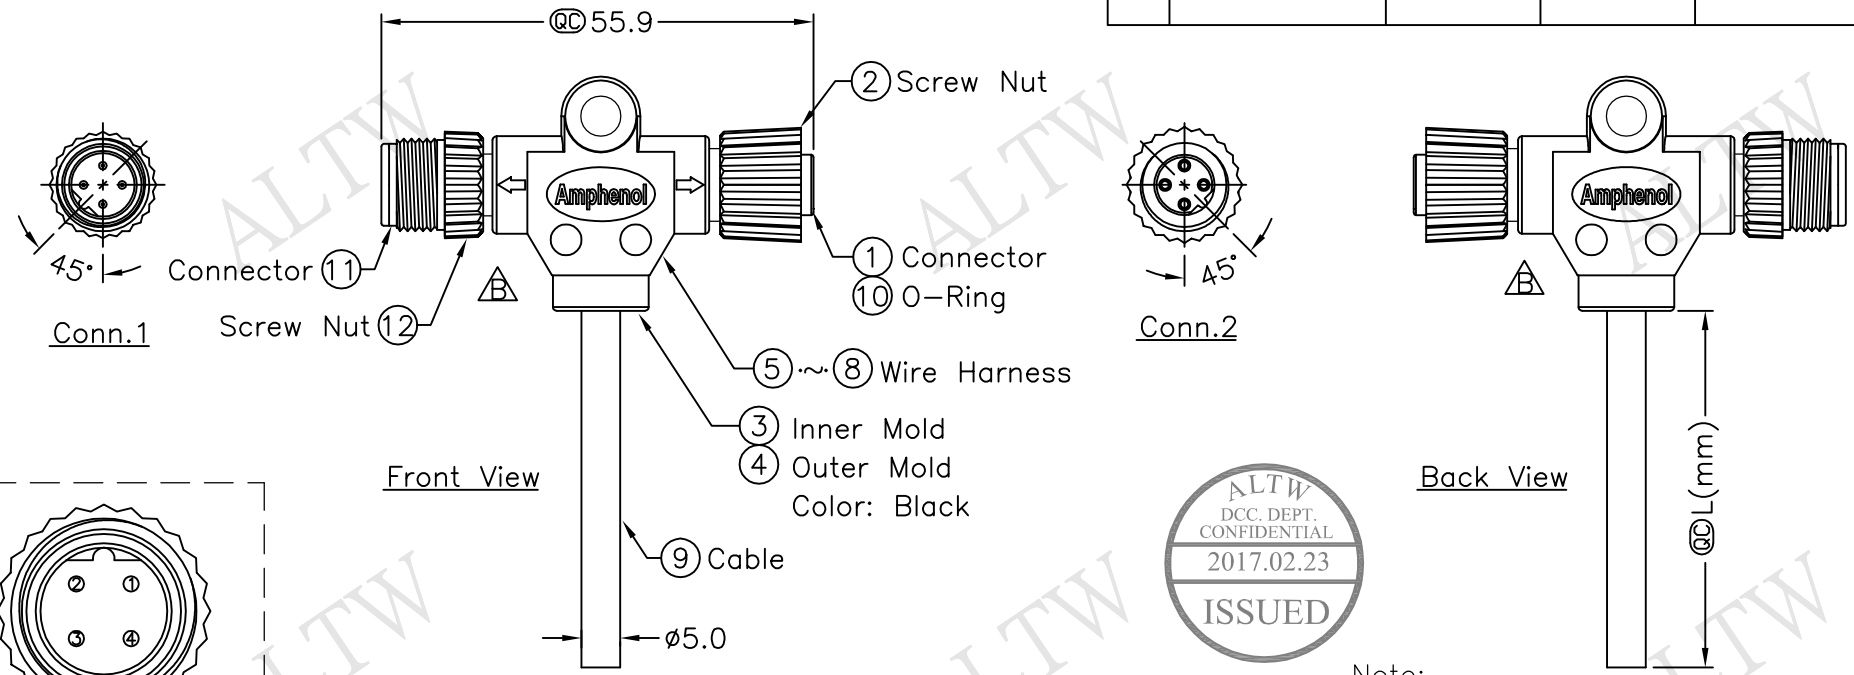

Conn.1
Pin Assignments
Front View



Conn.2
Pin Assignments
Front View



4	Black	黑	4
3	Blue	藍	3
2	White	白	2
1	Brown	棕	1
Conn.1	Wire Color		Conn.2
Pin Out			

PB-040400-MF0-TSAXX

XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters

Cable Length(L):01~99Meters



Note:

- * Ⓞ Important Dimension.
- * Waterproof Rate: IP68
- * Housing: Black, Polyurethane
- * Screw Nut: Black, Nylon+GF
- * Male Pin: Copper Alloy, Gold Plated
- * Female Pin: Copper Alloy, Gold Plated
- * Wire Harness: UL1007 24AWG, 4Pcs
- * Cable: UL2464 22AWG*4C+Talc
Black, PVC Jacket UV Resistant OD=5.0mm
- △ * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE		M12P B Coded Conn	
T Cable Screw MF Conn MF Pin			
SCALE	Free	SHEET	1 OF 1
REV.	B	SIZE	A4
		Ⓞ	:Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	PB-040400-MF0-TSAXX
CUSTOMER	ALTW

DRAWN BY	Ruru
CHECKED BY	Rita
APPROVED BY	Max

DATE	2017/02/09
DATE	2017/02/09
DATE	2017/02/09