
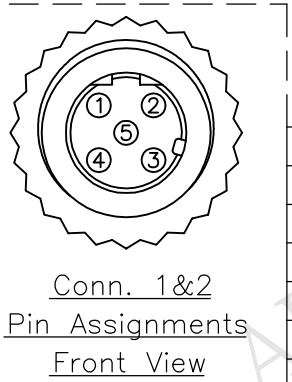

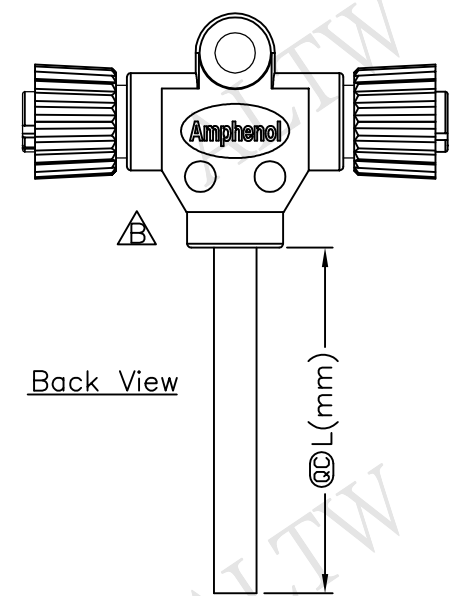

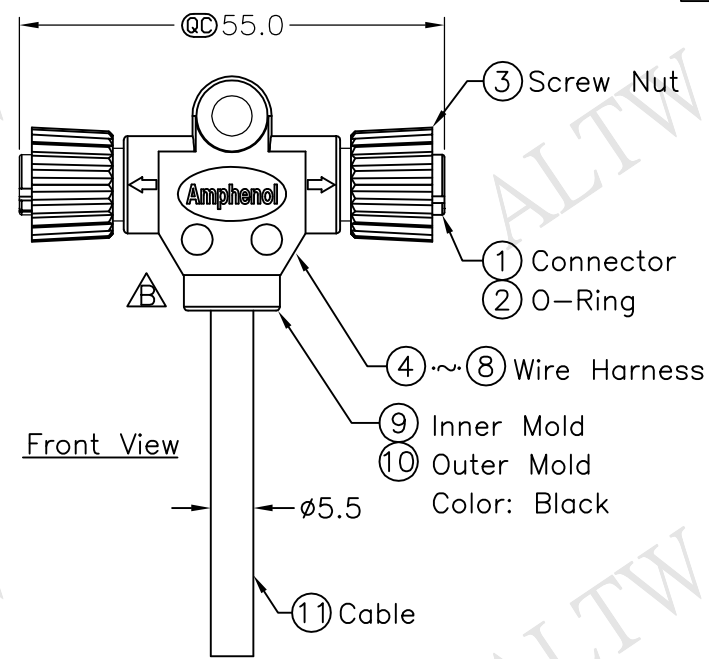


REV. B	ECN NO. LEN1720118~121	DATE 2017/02/09	SIGN Ruru	DESCRIPTION Change Logo & Outer Mold Design & Note
--------	------------------------	-----------------	-----------	--

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



5	Green	綠	5
4	Black	黑	4
3	Blue	藍	3
2	White	白	2
1	Brown	棕	1
Conn.1	Wire Color		Conn.2
Pin Out			

PD-050500-FF0-TSAXX

↑

XX:01~99Meter

01:01Meter

02:02Meters

⋮

99:99Meters

Cable Length(L):01~99Meters

- Note:
- * QC Important Dimension.
 - * Waterproof Rate: IP68
 - * Housing: Black, Polyurethane
 - * Screw Nut: Black, Nylon+GF
 - * Female Pin: Copper Alloy, Gold Plated
 - * Wire Harness: UL1007 24AWG
 - * Cable: Black, 22AWG*5C+Talc
PVC Jacket UV Resistant OD=5.5mm
 - * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT:mm		TITLE M12 Conn T Cable Screw FF Conn FF Pin	Amphenol LTW	ITEM NO	DRAWN BY Ruru	DATE 2017/02/09
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1	安費諾亮泰企業股份有限公司	DWG NO PD-050500-FF0-TSAXX	CHECKED BY Rita	DATE 2017/02/09
REV. B	SIZE A4	QC :Inspection Item		CUSTOMER ALTW	APPROVED BY Max	DATE 2017/02/09