



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1720130~133	2017/02/09	Ruru	Change Logo & Outer Mold Design & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

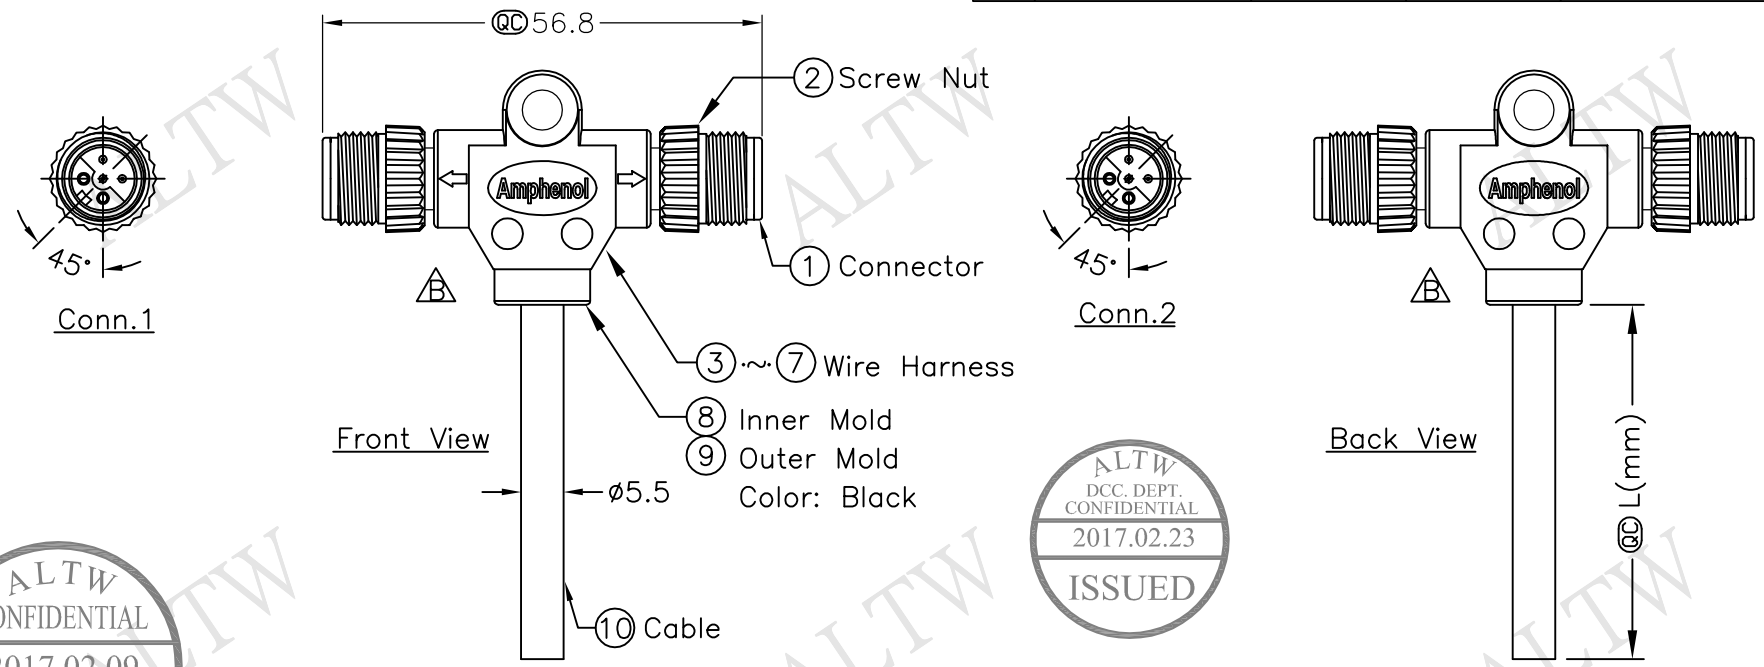

PI-050500-KK0-TSAXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * Ⓞ Important Dimension.
 - * Waterproof Rate: IP67
 - * Housing: Black, Polyurethane
 - * Screw Nut: Black, Nylon+GF
 - * Male Pin: Copper Alloy, Gold Plated
 - * Wire Harness: UL1007 24AWG,(5Pcs.)
 - * Cable: Black,UL2464 22AWG*5C+Talc PVC Jacket UV Resistant OD=5.5mm
 - * Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm



5	Green	綠	5
4	Black	黑	4
3	Blue	藍	3
2	White	白	2
1	Brown	棕	1
Conn.1	Wire Color		Conn.2
Pin Out			

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE		M12 Conn T Cable Screw MM Conn C Pin	
SCALE	Free	SHEET	1 OF 1
REV.	B	SIZE	A4
		Ⓞ :Inspection Item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
	Ruru	2017/02/09
PI-050500-KK0-TSAXX	Rita	2017/02/09
ALTW	Max	2017/02/09