





REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1720174~177	2017/02/10	Ruru	Change Logo & Outer Mold Design & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

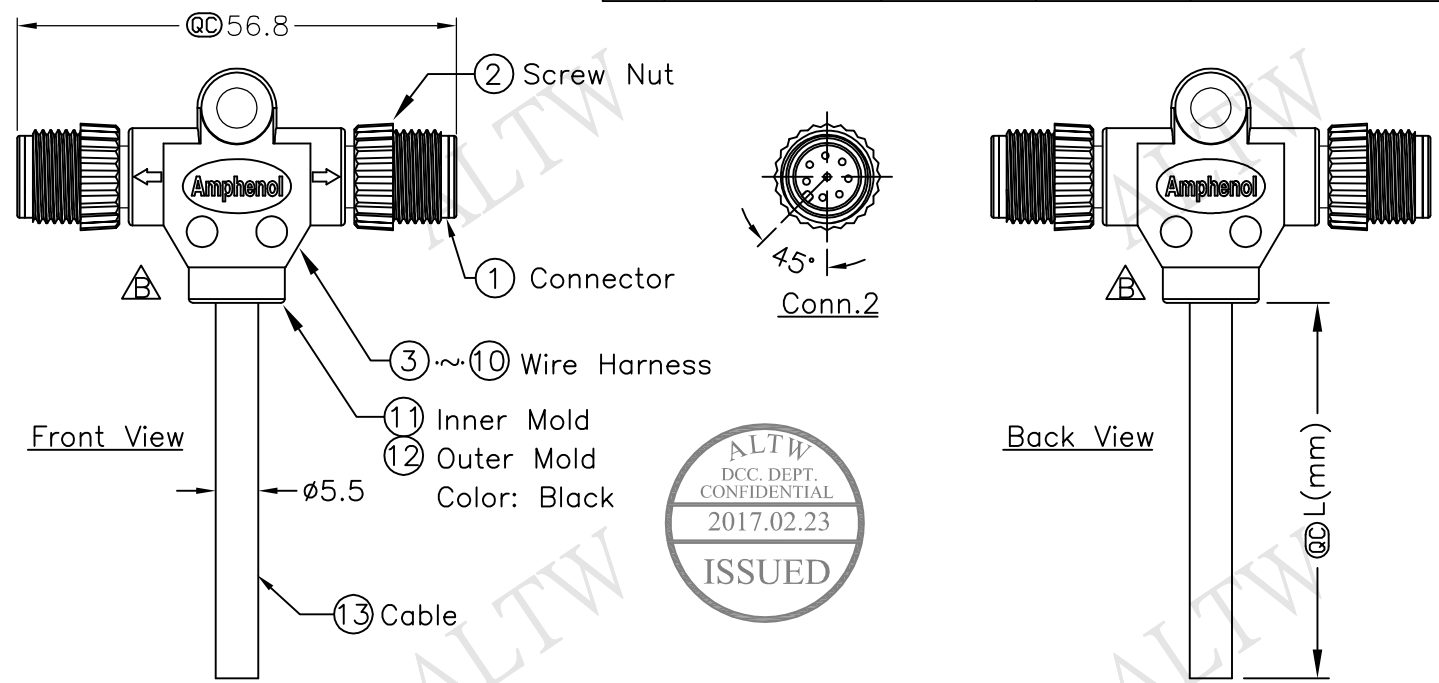

Conn.1&2
Pin Assignments
Front View

8	Gray	灰	8
7	Purple	紫	7
6	Blue	藍	6
5	Green	綠	5
4	Yellow	黃	4
3	Orange	橘	3
2	Red	紅	2
1	Brown	棕	1
Conn.1	Wire Color		Conn.2
Pin Out			

PS-080800-MM0-TSAXX

↑
XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters
Cable Length(L):01~99Meters

- Note:
- * @C Important Dimension.
 - * Waterproof Rate: IP68
 - * Housing: Black, PU
 - * Male Pin: Copper Alloy, Gold Plated
 - * Wire Harness: UL1007, 24AWG, 8Pcs.
 - * Cable: Black, UL2464 24AWG*8C+Talc PVC Jacket (UV Resistant), OD=5.5mm
 - * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE M12 Conn T Cable Screw MM Conn MM Pin	
SCALE Free	SHEET 1 OF 1
REV. B	SIZE A4 @C :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO PS-080800-MM0-TSAXX
CUSTOMER ALTW	

DRAWN BY Ruru	DATE 2017/02/10
CHECKED BY Rita	DATE 2017/02/10
APPROVED BY Max	DATE 2017/02/10