



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-880275~278	2008/03/31	Gao Ling	Add Cross
C	LEN1720305~308	2017/02/15	Ruru	Change Logo & Outer Mold Design & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

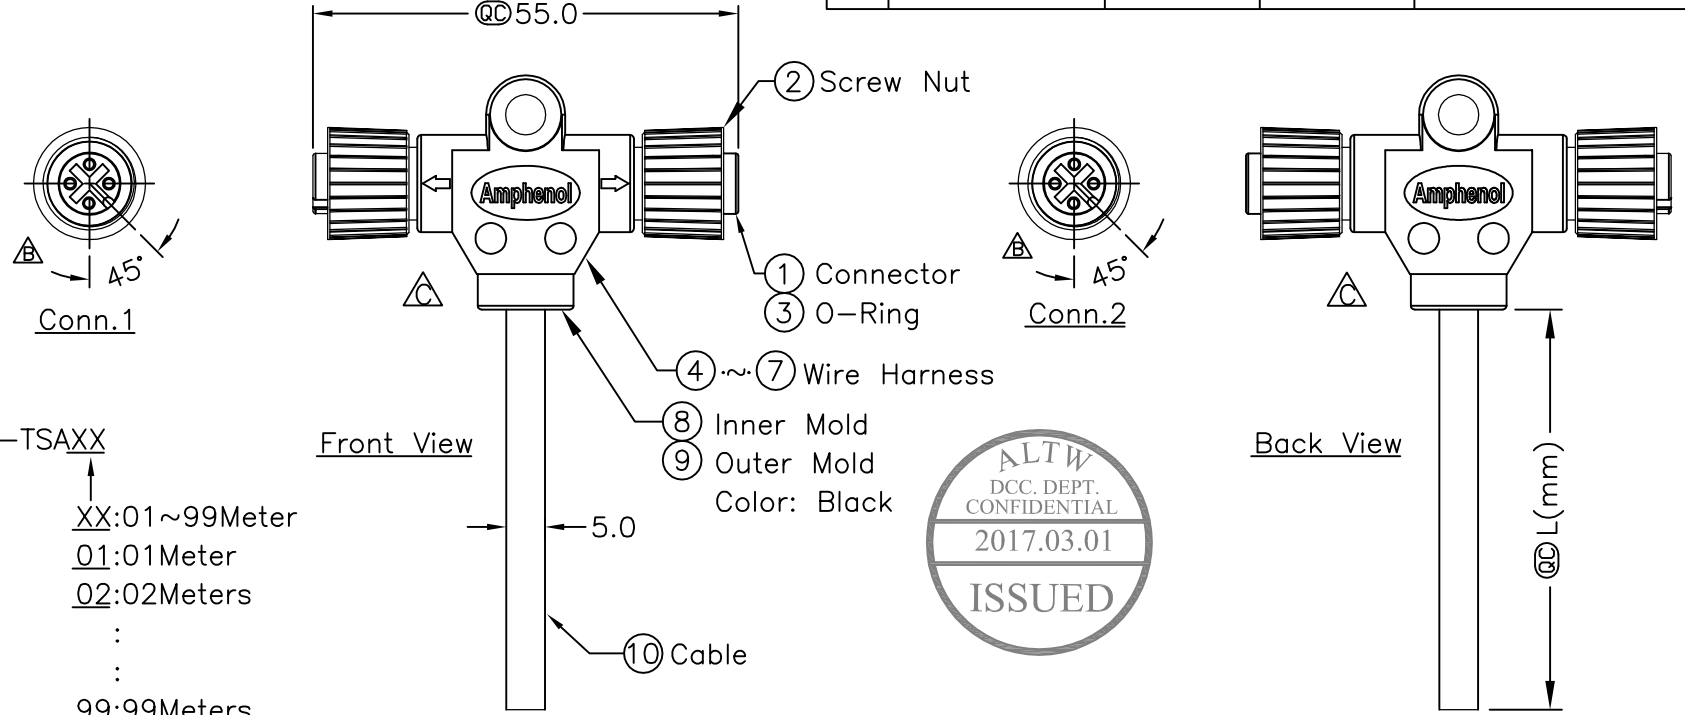

SS-040400-FF0-TSAXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters



Conn.1 & Conn.2
 Pin Assignments
 Front View

4	Black	黑	4
3	Blue	藍	3
2	White	白	2
1	Brown	棕	1
Conn.1	Wire Color		Conn.2
Pin Out			

Note:
 * QC Important Dimension.
 * Waterproof Rate: IP68
 * Housing: Black, PU
 * Female Pin: Copper Alloy, Gold Plated
 * Wire Harness: UL1007 24AWG, 4Pcs.
 * Cable: UL2464 22AWG*4C+Talc
 Black, PVC Jacket UV Resistant OD=5.0mm
 * Cable Length Tolerance: 01M: $\pm 40\text{mm}$
 02M~05M: $\pm 60\text{mm}$
 06M~10M: $\pm 100\text{mm}$
 11M~30M: $\pm 200\text{mm}$
 31M~99M: $\pm 500\text{mm}$

UNIT:mm		TITLE	M12 Conn T Cable Screw FF Conn FF Pin	Amphenol LTW	ITEM NO	SS-040400-FF0-TSAXX	DRAWN BY	Ruru	DATE	2017/02/15	
TOLERANCE	$\pm 0.5 \text{ mm}$	SCALE	Free	SHEET	1 OF 1	CUSTOMER	ALTW	CHECKED BY	Rita	DATE	2017/02/15
REV.	C	SIZE	A4	QC	:Inspection Item			APPROVED BY	Max	DATE	2017/02/15