REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C191730	2019/10/08	Vicky	Update Code & Wire Tolerance

ALTW
CONFIDENTIAL
2019-10-08
R&D DEPT.

CBD-06RFMC-RS8CXX
- 10 : 100mm
- 15 : 150mm
- 20 : 200mm
- ∫
- B A0 : 1000mm

Cable Pitch Unit:50mm
Wire Length(L):100~1000mm

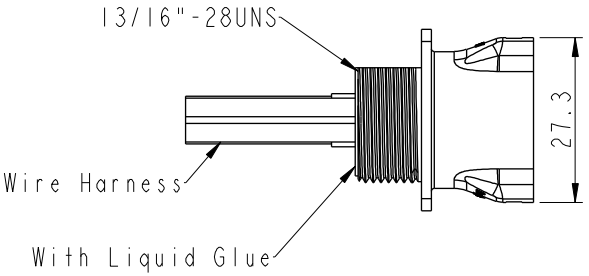

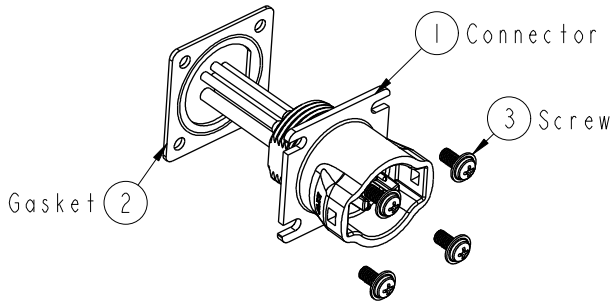

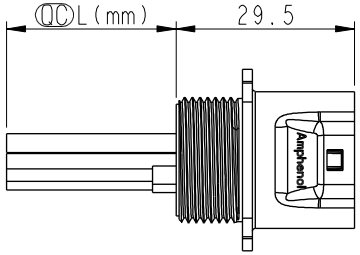



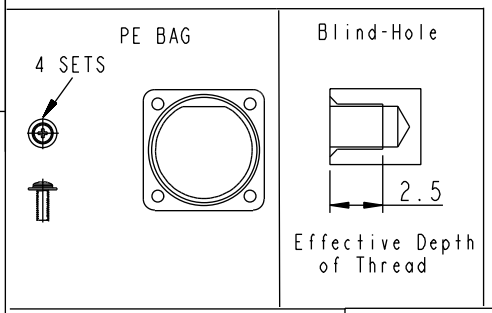



Pin Assignments
Front View

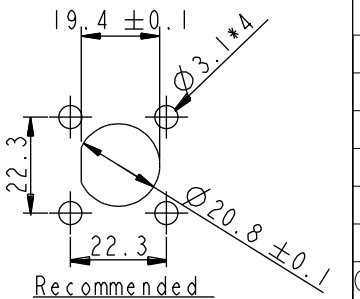

Recommended
Panel Cut-out

Conn.	Wire Color	
6	Black (20AWG)	黑
5	White (20AWG)	白
4	Green (20AWG)	綠
3	Blue (16AWG)	藍
2	Red (16AWG)	紅
1	Black (16AWG)	黑

Pin Out

Note:
- * QC Important Dimension To Check.
- * Waterproof Rate: IP68(1M/24H)
- * Housing: M-PPE, Black.
- * Male Pin: Copper Alloy, Gold Plated.
- * Gasket: Silicone, Gray.
- * Wire Harness: UL1015
- * Blind holes for the screws used M3X0.5mm
- * Blind Hole Size M3X0.5mm
- * Screw Torque: 1.5~2kgf.cm
- B * Wire harness Tolerance: 100 ±10mm
  - 101~300 ±15mm
  - 301~1000 ±20mm
- * Prohibiting the use of place in oils

UNIT:mm
TOLERANCE ±0.5mm

TITLE: Middle Panel RBL F CONN M PIN
SCALE 1:1 | SIZE A4 | SHEET 1 OF 1
REV. B | WC-REV. .0 | QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Peng	2019-01-08
DWG NO CBD-06RFMC-RS8CXX	CHECKED BY Mafei	DATE 2019-01-08
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2019-01-08

W10814-03-RM01A2

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.