



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C210219	2021/03/17	Vicky	△ X4
E	C210796	2021/05/24	Vicky	△ X1
F	C221890	2022/12/26	Vicky	△ X1

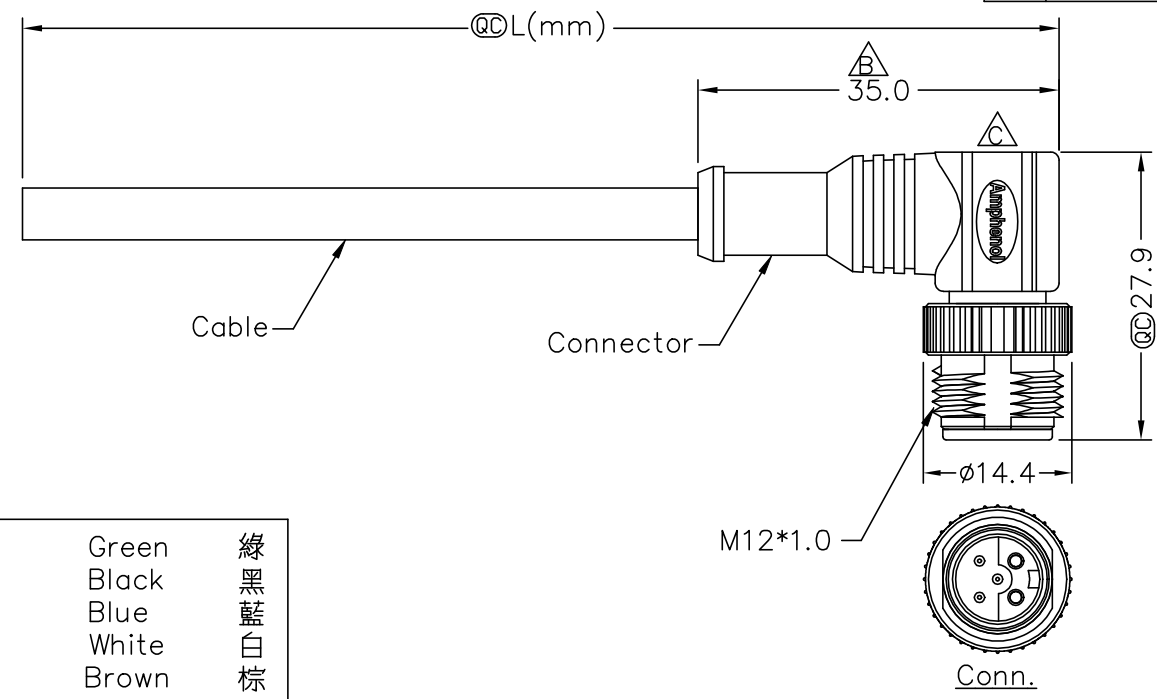

Pin Out	Pin #	Wire
5	Green	綠
4	Black	黑
3	Blue	藍
2	White	白
1	Brown	棕

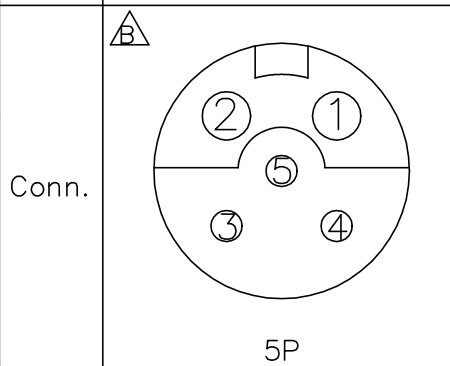

Pin Assignments Front View

△12-XXBMIM-SR8AXX
 XX: No. Of Pin
 XX: 01~99Meters
 01: 01Meter
 02: 02Meters
 :
 :
 99: 99Meters
 Cable Length(L): 01~99Meters

- △ Note:
- * RoHS Compliant
 - * @L Important dimension
 - △ * Waterproof rate: IP68, mated 1m/24h
IP69K, mated
 - * Connector
 - △ Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
Nut: Metal
Outer mold: Thermoplastic, Black
 - * Cable: UL2464, 22#*5C+Talcum, OD=5.5mm,
PVC Jacket, UV Resistant, Black
 - △ * Cable length tolerance:
 - 1M: +50/-0 mm
 - 1M < L ≤ 3M: +100/-0 mm
 - 3M < L ≤ 5M: +150/-0 mm
 - 5M < L ≤ 10M: ±100 mm
 - 10M < L ≤ 20M: ±200 mm
 - 20M < L ≤ 30M: ±300 mm
 - △ 30M < L ≤ 99M: ±500 mm

UNIT: mm	TITLE O SEN, M12 A (I) △△	Amphenol LTW		ITEM NO	DRAWN BY Prune	DATE 2009/01/14
TOLERANCE ±0.5mm	CABLE W/O SR, M, I, MOLDING	安費諾亮泰企業股份有限公司		DWG. NO △12-XXBMIM-SR8AXX	CHECKED BY Tina	DATE 2009/01/14
SCALE Free	SHEET 1 OF 1			CUSTOMER ALTW	APPROVED BY Luke	DATE 2009/03/26
REV. F	SIZE A4	@C: Inspection Item		8 W0814-03-表單01A2		

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.