



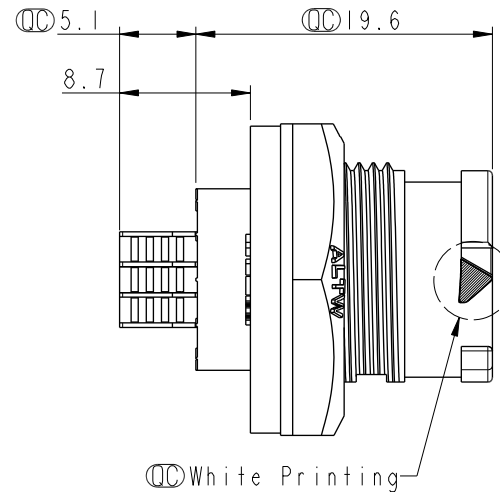


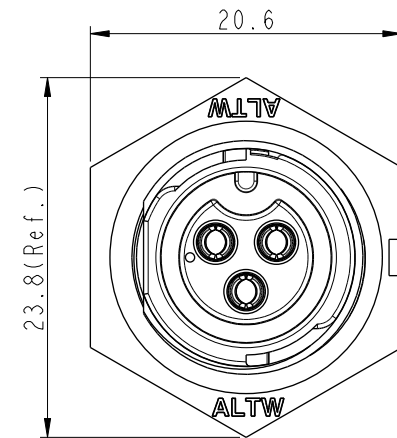

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C190411	2019/03/14	Vicky	Change Note
C	C220466	2022/04/08	Ruru	 X5
D	C230086	2023/01/31	Ruru	 X1

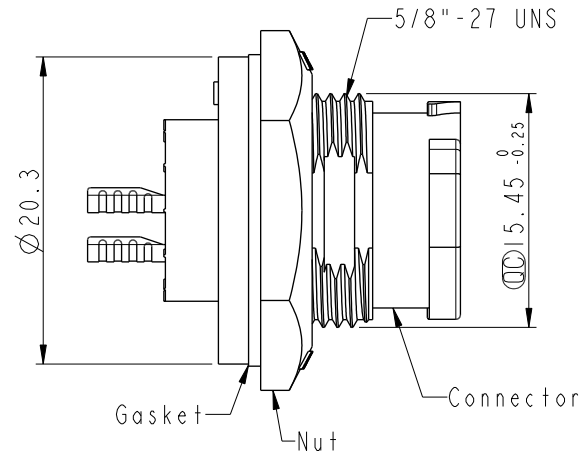


Recommended
Panel Cut-out

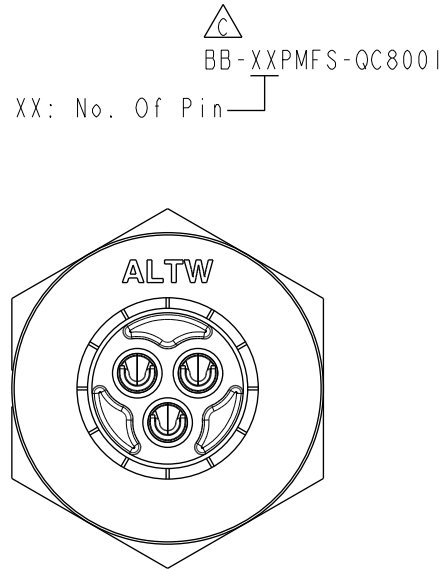


Note:

- * RoHS Compliant
- *  Important dimension
- *  Waterproof rate: IP68, unmated 1m/24h
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Gray
- * Use with waterproof cap or dust cap
Panel thickness max: 3.0mm
- * Use without waterproof cap or dust cap
Panel thickness max: 4.0mm
- * Gasket and nut are packed separately
in pe bag

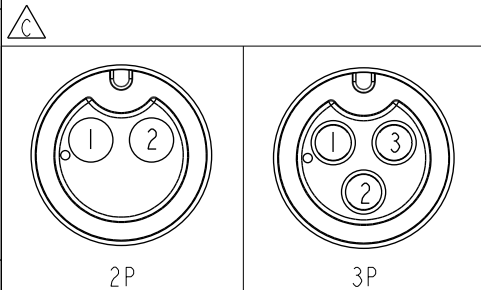


Pin Assignment Front View

UNIT:mm




TOLERANCE

.X ± 0.25 mm

TITLE				XLOK, B-10A, FRONT FASTENED M, F, SOLDER, PUSH LOCK 			
SCALE		2:1		SIZE		A4	
SHEET		1		OF		1	
REV.		D		WC-REV.		A.3	
						QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
BB-XXPMFS-QC8001 		
CUSTOMER	APPROVED BY	DATE
ALTW		