



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1540299	2015/04/16	Micky	Modify #2 Wire Color
C	C220458	2022/03/31	Ruru	△C X9
D	C230120	2023/02/03	Ruru	△D X1

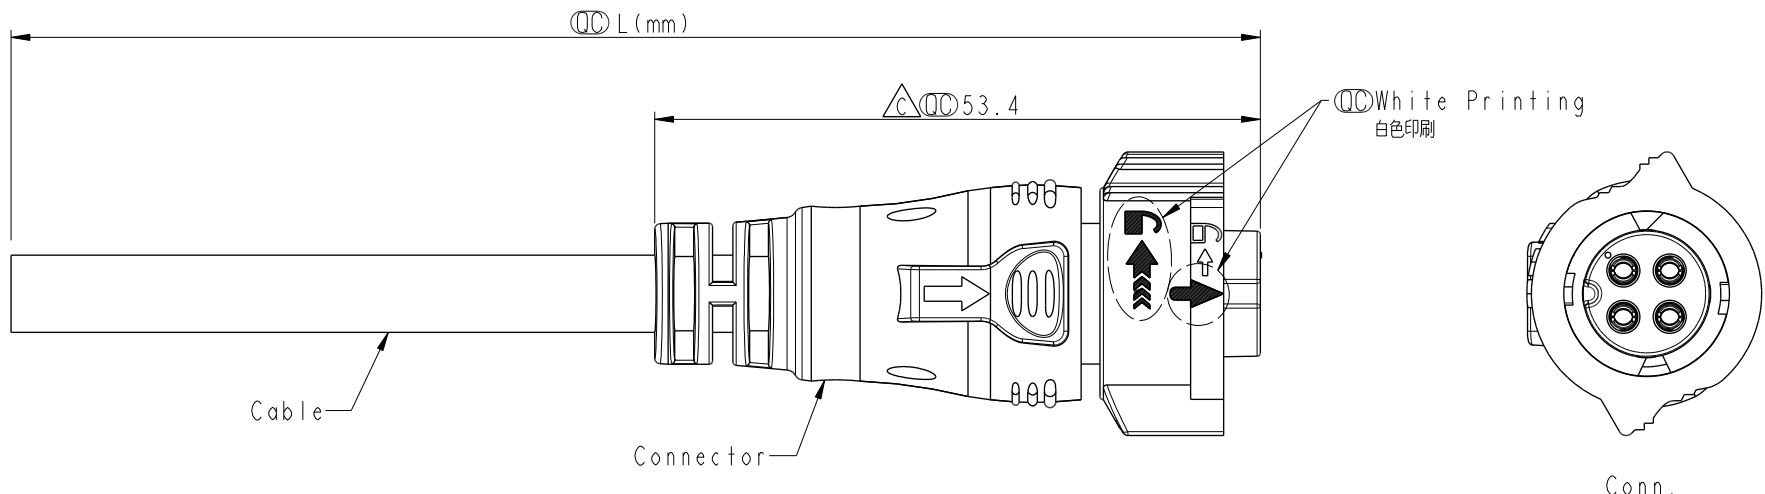

Note: △C

- \* RoHS Compliant
- \* 重要 dimension
- △D \* Waterproof rate: IP68, mated 1m/24h
- \* Connector
- Housing: Thermoplastic, Black
- Pin: Copper Alloy, Gold Plated
- O-Ring: Rubber, Dark Gray
- Nut: Thermoplastic, Black
- Outer mold: Thermoplastic, Black
- \* Cable: UL21388, PVC Jacket, Black
- \* Cable length tolerance: 1M: +50/-0 mm
- 1M < L ≤ 3M: +100/-0 mm
- 3M < L ≤ 5M: +150/-0 mm
- 5M < L ≤ 10M: ±100 mm
- 10M < L ≤ 20M: ±200 mm
- 20M < L ≤ 30M: ±300 mm
- 30M < L ≤ 99M: ±500 mm

UNIT:mm				TITLE XLOK, B-10A, CABLE W/SR F, F, MOLDING, PUSH LOCK △C				ITEM NO		DRAWN BY Micky		DATE 2014-09-12	
TOLERANCE		±0.5 mm		SCALE 3:2	SIZE A4	SHEET 1	OF 2	DWG NO BB-XXAFFM-QL8DXX △C		CHECKED BY Spring		DATE 2014-09-12	
REV. D		WC-REV. A.2		QC: Inspection item				CUSTOMER ALTW		APPROVED BY Kevin		DATE 2014-09-12	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



XX: No. Of Pin—

•  
•  
•  
•



A triangle with the letter B inside it.

△

**Amphenol LTW**  
安費諾亮泰企業股份有限公司