



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C210219	2021/03/17	Vicky	△ X4
E	C210796	2021/05/24	Vicky	△ X1
F	C221890	2022/12/26	Vicky	△ X1

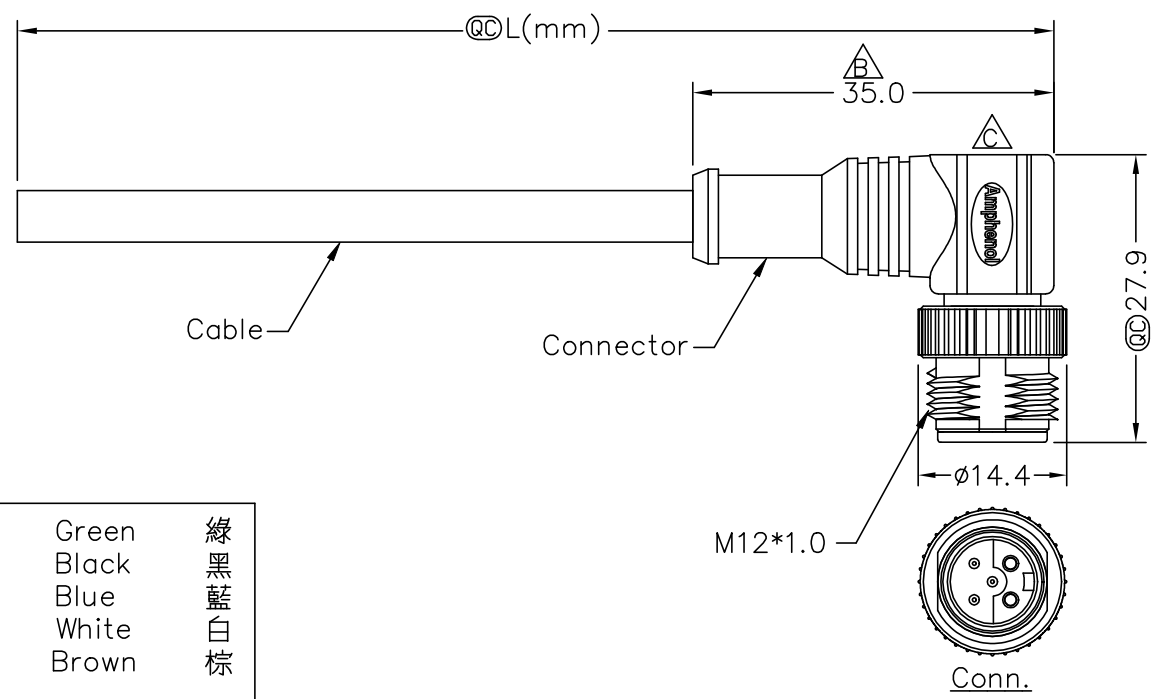

Pin Out	Pin #	Wire	Color
5		Green	綠
4		Black	黑
3		Blue	藍
2		White	白
1		Brown	棕

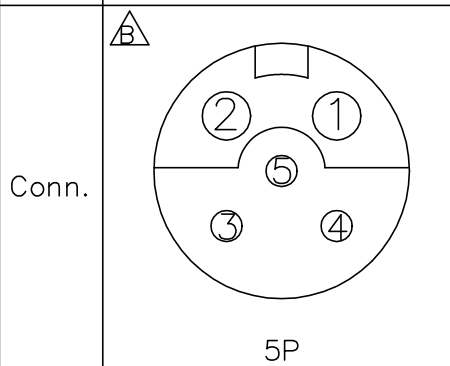

△12-XXBMIM-SR8BXX  
 XX: No. Of Pin  
 XX: 01~99Meters  
 01: 01Meter  
 02: 02Meters  
 :  
 :  
 99: 99Meters  
 Cable Length(L): 01~99Meters

- △ Note:
- \* RoHS Compliant
  - \* @C Important dimension
  - △ \* Waterproof rate: IP68, mated 1m/24h  
IP69K, mated
  - \* Connector
  - △ C Housing: Thermoplastic, Black  
Pin: Copper alloy, Gold plated  
Nut: Metal  
Outer mold: Thermoplastic, Black
  - \* Cable: 22#\*5C+Insulation, OD=5.0mm,  
PU Jacket, Black
  - △ \* Cable length tolerance:
- |                  |            |
|------------------|------------|
| 1M:              | +50/-0 mm  |
| 1M < L ≤ 3M:     | +100/-0 mm |
| 3M < L ≤ 5M:     | +150/-0 mm |
| 5M < L ≤ 10M:    | ±100 mm    |
| 10M < L ≤ 20M:   | ±200 mm    |
| 20M < L ≤ 30M:   | ±300 mm    |
| △ 30M < L ≤ 99M: | ±500 mm    |

UNIT:mm	TITLE O SEN, M12 A (I) △△	
TOLERANCE ±0.5mm	CABLE W/O SR, M, I, MOLDING	
SCALE Free	SHEET 1	OF 1
REV. F	SIZE A4	@C : Inspection Item

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Prune	DATE 2009/01/14
DWG. NO △12-XXBMIM-SR8BXX	CHECKED BY Tina	DATE 2009/01/14
CUSTOMER ALTW	APPROVED BY Luke	DATE 2009/03/26

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.