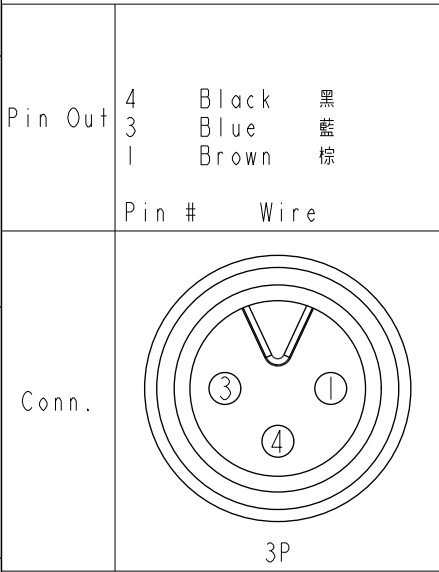
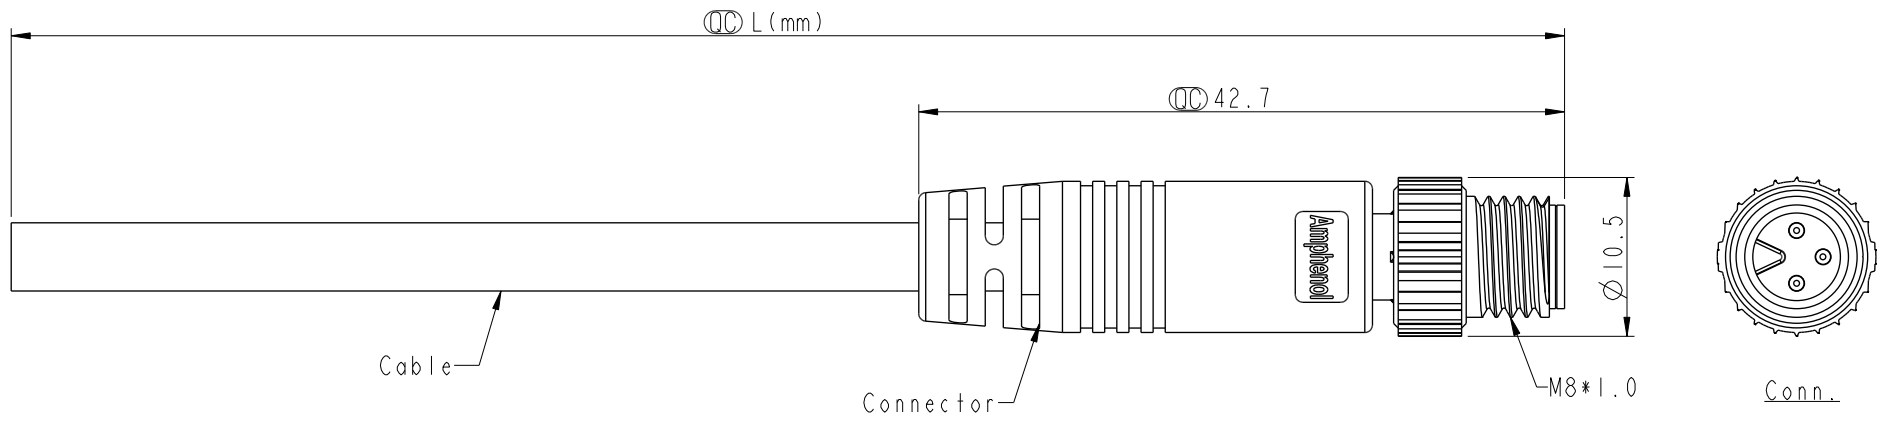





THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C210213	2021/04/22	Ruru	 X4
C	C221871	2022/12/02	Vicky	 X1





Pin Assignments Front View


UNIT:mm		
TOLERANCE	±0.5 mm	

 8A-XXAMMM-SL7BXX
XX: No. Of Pin
XX:01~99Meters
01:01Meter
02:02Meters
:
99:99Meters

-  Note:
- * RoHS Compliant
 - *  Important dimension
 - *  Waterproof rate: IP67, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Nut: Metal
 - Outer mold: Thermoplastic, Black
 - * Cable: 22#*3C, OD=4.5mm, PU Jacket, Black
 - * Cable length tolerance: 1M: +50/-0 mm
 - 1M < L ≤ 3M: +100/-0 mm
 - 3M < L ≤ 5M: +150/-0 mm
 - 5M < L ≤ 10M: ±100 mm
 - 10M < L ≤ 20M: ±200 mm
 - 20M < L ≤ 30M: ±300 mm
 - 30M < L ≤ 99M: ±500 mm

TITLE O SEN, M8 W/KEY CABLE W/SR, M, M, MOLDING 		
SCALE 2:1	SIZE A4	SHEET 1 OF 1
REV. C	WC-REV. A.1	 Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Tony-leng	DATE 2015-01-22
DWG NO  8A-XXAMMM-SL7BXX	CHECKED BY Jimmy	DATE 2015-01-22
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2015-01-22