
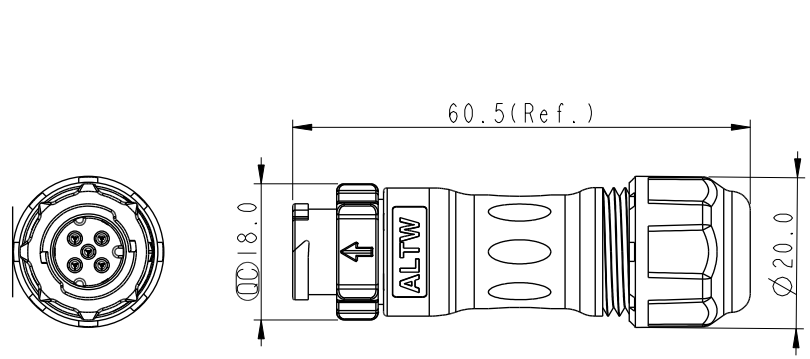



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C221184	2022-08-04	Ouyang	$\triangle B$ X1
C	C230124	2023-02-06	Ruru	$\triangle C$ X3

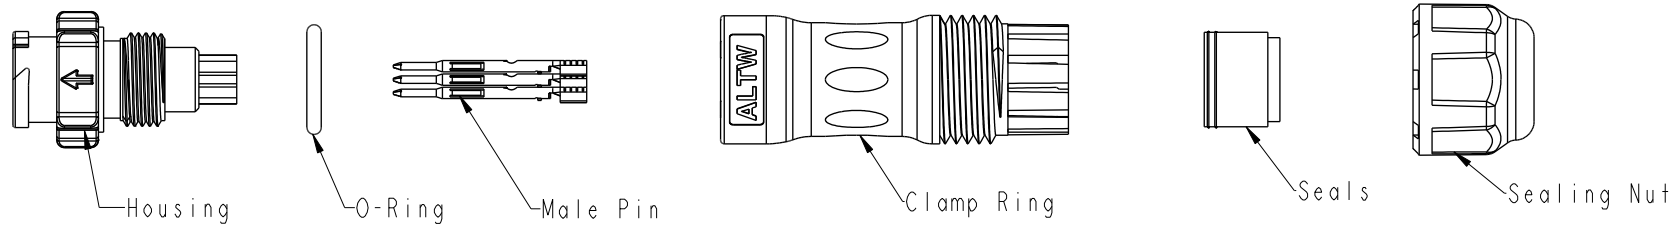

$\triangle C$   
 XX: No. Of Pin  
 S: With Red Color Seal 1, Cable OD 5.0~6.0mm.  
 M: With Yellow Color Seal 2, Cable OD 6.0~8.0mm.  
 L: With Blue Color Seal 3, Cable OD 8.0~10.0mm.  
 A: With Seal 1 & Seal 2 & Seal 3.

- Note:  $\triangle B$
- \* RoHS Compliant
  - \*  $\text{CC}$  Important Dimension
  - $\triangle C$  \* Waterproof Rate: IP68, Mated 1m/24h
  - \* Connector
  - Housing: Thermoplastic, Black
  - Pin: Copper Alloy, Gold Plated
  - Nut: Thermoplastic, Black
  - O-Ring: Rubber, Gray
  - \* Clamp Ring: Thermoplastic, Black
  - \* Sealing Nut: Thermoplastic, Black
  - \* Seal 1: Rubber, Red,
  - \* Seal 2: Rubber, Yellow,
  - \* Seal 3: Rubber, Blue,
  - \* One set unassembled in one PE bag

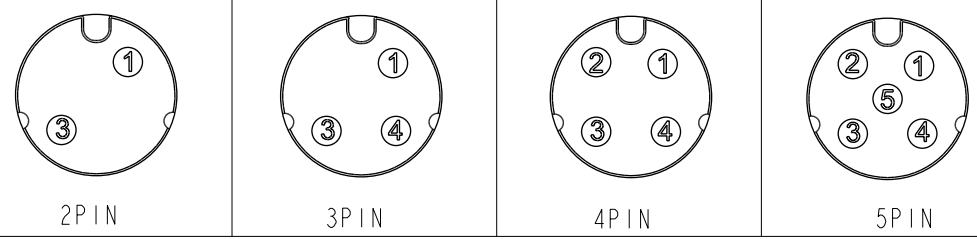

Pin Assignments Front View

UNIT: mm	$\text{CC}$	TITLE XLOK, A-5A, CABLE W/O SR M, M, FI CRIMP, PUSH LOCK $\triangle C$
TOLERANCE $\pm 0.5\text{mm}$	SCALE 1:1	SIZE A4
	REV. C	WC-REV. .0
		$\text{CC}$ : Inspection item

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ouyang	DATE 2022-06-25
DWG NO AD-XXBMMA-QL8XP0	CHECKED BY Jerry	DATE 2022-06-25
CUSTOMER ALTW	APPROVED BY Fred	DATE 2022-06-25