


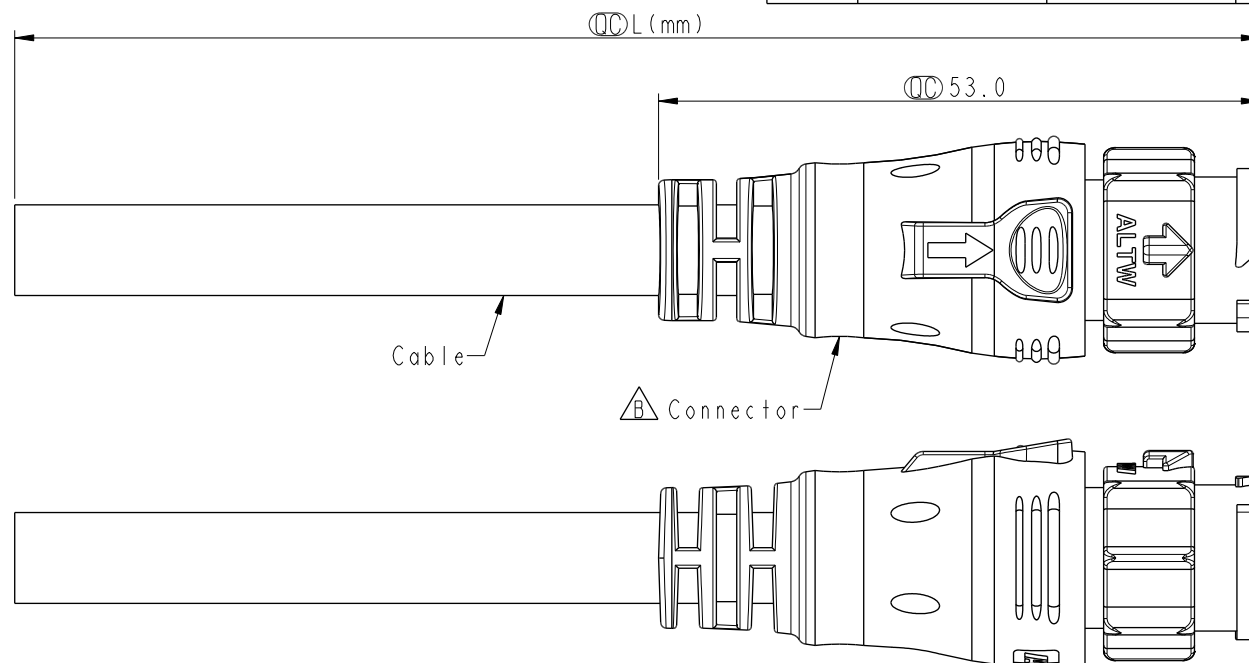





REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE31680206	2016/07/18	Tom Gu	Change Part No. of Half Finished
C	C220466	2022/04/12	Ruru	 X5
D	C230121	2023/02/06	Ruru	 X1




Pin Out	3 White 2 Green 1 Black		白 綠 黑
Conn.		3P	



△
C

BD-XXAMFM-QL8EXX

XX: No. Of Pin

XX : 01~99Meters
01 : 01Meter
02 : 02Meters
:
:
99 : 99Meters

Note:  Conn.

- * RoHS Compliant
- *  Important dimension
- *  Waterproof rate: IP68, mated 1m/24h
- * Connector

Housing: Thermoplastic, Black
Pin: Copper Alloy, Gold Plated
Outer mold: Thermoplastic, Black

- * Cable: SJTW, 18#*3C, OD=8.0, PVC Jacket, Black
- * Cable length tolerance: 1M: +50/-0 mm
1M < L ≤ 3M: +100/-0 mm
3M < L ≤ 5M: +150/-0 mm
5M < L ≤ 10M: ±100 mm
10M < L ≤ 20M: ±200 mm
20M < L ≤ 30M: ±300 mm
30M < L ≤ 99M: ±500 mm

UNIT: mm				TITLE XLOK, B-5A, CABLE W/SR M, F, MOLDING, XLOK		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO		DRAWN BY Tom Gu		DATE 2016-07-18	
TOLERANCE ±0.5 mm		SCALE 3:2		SIZE A4				SHEET 1 OF 1		DWG NO BD-XXAMFM-QL8EXX		CHECKED BY Spring Liu	
REV. D		WC-REV. A.2		QC: Inspection item				CUSTOMER ALTW		APPROVED BY Kevin Hu		DATE 2016-07-18	