
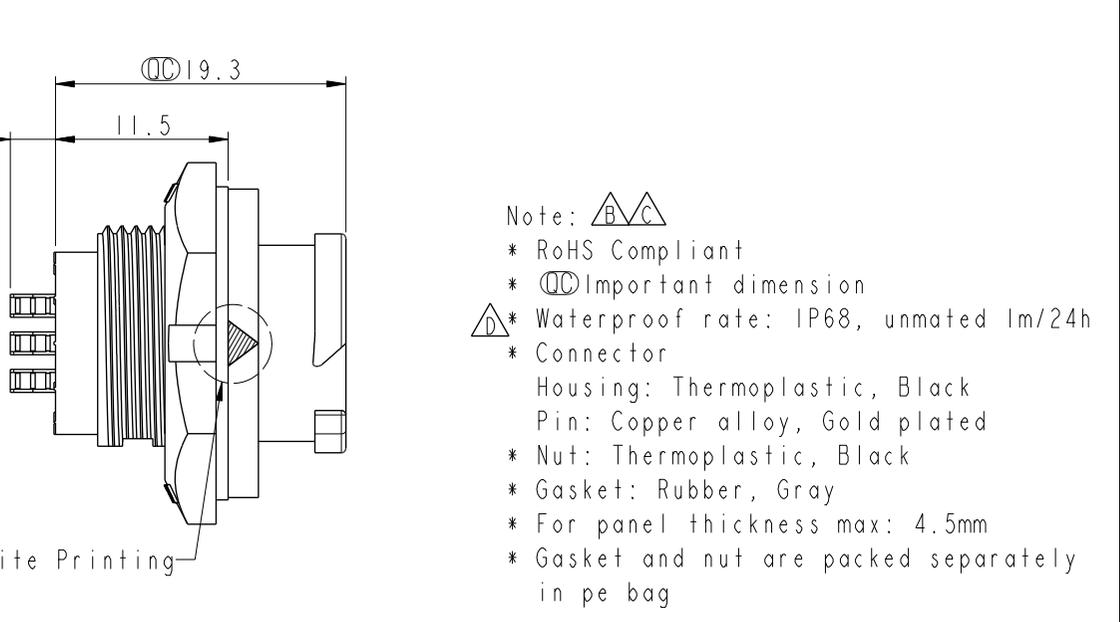
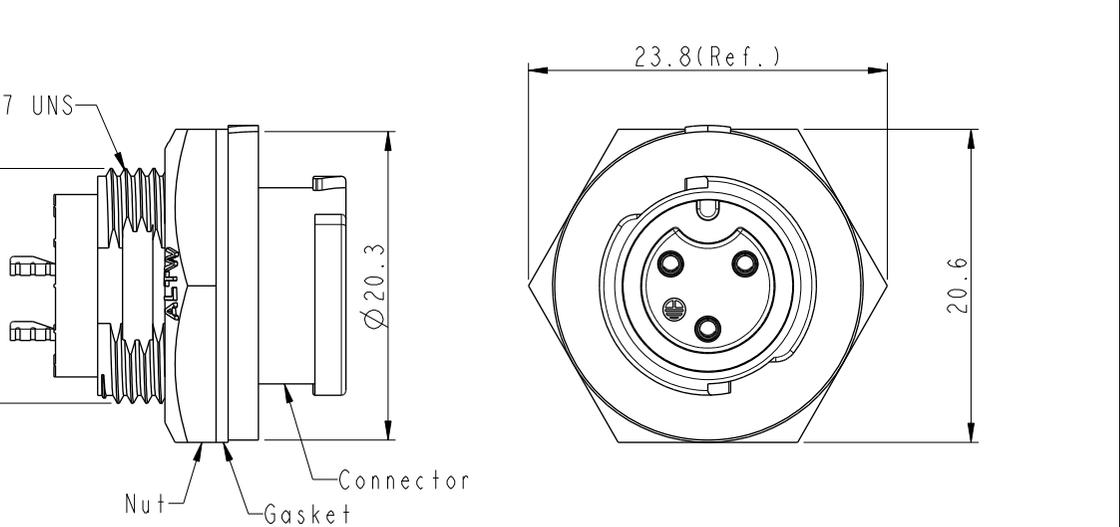
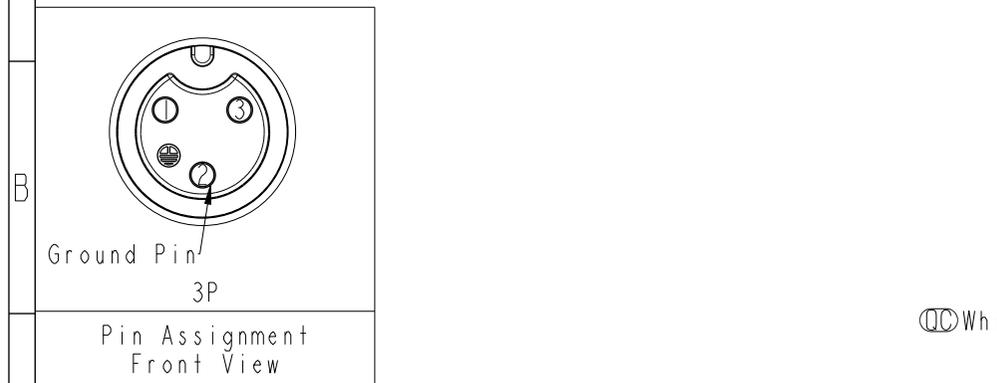
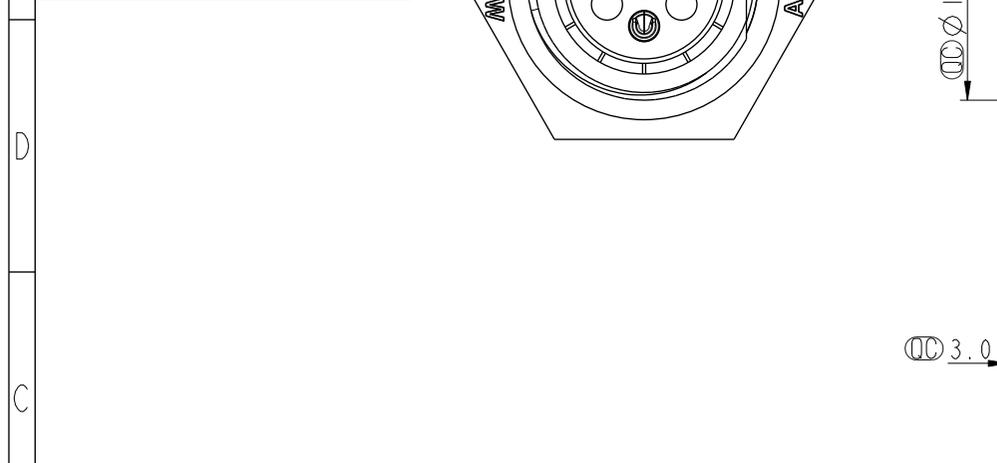


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C190411	2019/03/18	Vicky	Change Note
C	C220466	2022/04/14	Ruru	△C X4
D	C230086	2023/01/31	Ruru	△D X1

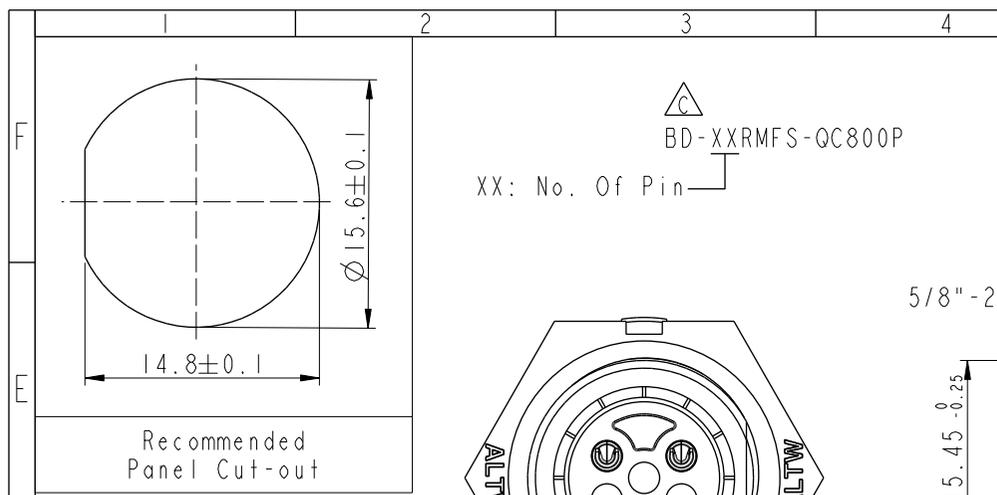

- Note: △B△C
- \* RoHS Compliant
  - \* ∅ Important dimension
  - △\* Waterproof rate: IP68, unmated 1m/24h
  - \* Connector  
Housing: Thermoplastic, Black  
Pin: Copper alloy, Gold plated
  - \* Nut: Thermoplastic, Black
  - \* Gasket: Rubber, Gray
  - \* For panel thickness max: 4.5mm
  - \* Gasket and nut are packed separately in pe bag

UNIT:mm TOLERANCE .X ± 0.25 mm	TITLE XLOK, B-5A, REAR FASTENED M, F, SOLDER, PUSH LOCK △C		
	SCALE 2:1	SIZE A4	SHEET 1 OF 1
	REV. D	WC-REV. A.1	∅: Inspection item
	Amphenol LTW 安費諾亮泰企業股份有限公司		

ITEM NO.	DRAWN BY Vicky	DATE 2019-03-18
DWG NO. BD-XXRMFS-QC800P △C	CHECKED BY Rita	DATE 2019-03-18
CUSTOMER ALTW	APPROVED BY Max	DATE 2019-03-18