
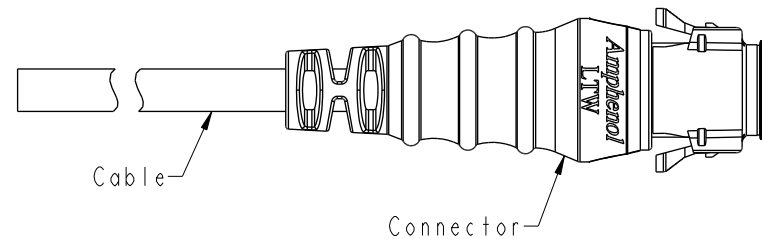
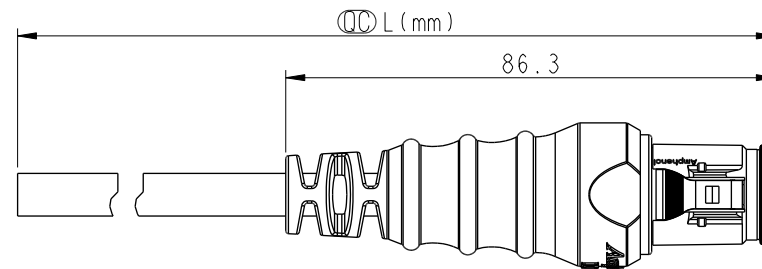



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1580284~86	2015/08/12	Lu Di	Change To Common Drawing
C	LEN1680345 LEN1680352~53	2016/08/08	Mafei	Updated The Pin Out Color.
D	C230237	2023/02/22	Vicky	 X5

Conn.

 Note:

- * RoHS Compliant
- *  Important dimension
- * Waterproof rate: IP67, mated
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - O-Ring: Rubber, Gray
 - Gasket: Rubber, Gray
 - Outer mold: Thermoplastic, Black
- * Cable: UL2464, PVC Jacket, Black
- * Cable length tolerance: 1M: +50/-0 mm

UNIT:mm	 	TITLE RBL, C-10A, CABLE W/SR M, F, MOLDING, RBL			 <h1>Amphenol LTW</h1> <h2>安費諾亮泰企業股份有限公司</h2>	ITEM NO	DRAWN BY Mafei	DATE 2016/08/08
TOLERANCE ±0.5		SCALE 3:4	SIZE A4	SHEET 1 OF 2		DWG NO CB-XXAMFM-RL7AXX	CHECKED BY Joyy	DATE 2016/08/08
		REV. D	WC-REV. A.4	QC: Inspection item		CUSTOMER ALTW	APPROVED BY Jerry	DATE 2016/08/08

△ CB-XXAMFM-RL7AXX

XX: No. Of Pin ————— XX:01~99Meters
 01:01Meter
 02:02Meters
 :
 99:99Meters

Pin Assignments Front View

A	UNIT: mm	 	TITLE RBL, C-10A, CABLE W/SR M, F, MOLDING, RBL				<h1>Amphenol LTW</h1> <h2>安費諾亮泰企業股份有限公司</h2>	ITEM NO	DRAWN BY Mafei	DATE 2016/08/08		
	TOLERANCE	±0.5			SCALE 3:4			SIZE A4	SHEET 2 OF 2	DWG NO CB-XXAMFM-RL7AXX	CHECKED BY Joyy	DATE 2016/08/08
	REV. D				MC-REV. A.4			QC: Inspection item		CUSTOMER ALTW	APPROVED BY Jerry	DATE 2016/08/08