
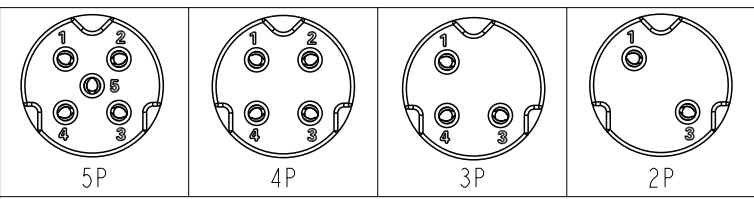
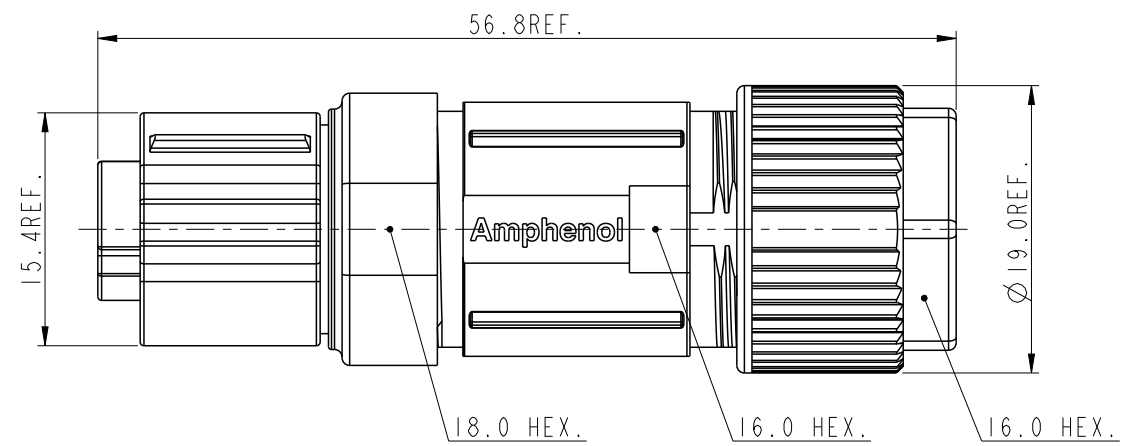


1		2		3		4		5		6		7		8	
				REV.		ECN NO.		DATE		SIGN		DESCRIPTION			
				A				2023-03-23		Sam Ho		Rev.02 to A, Initial Released			

</

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2023-03-23	Sam Ho	Rev.02 to A, Initial Released

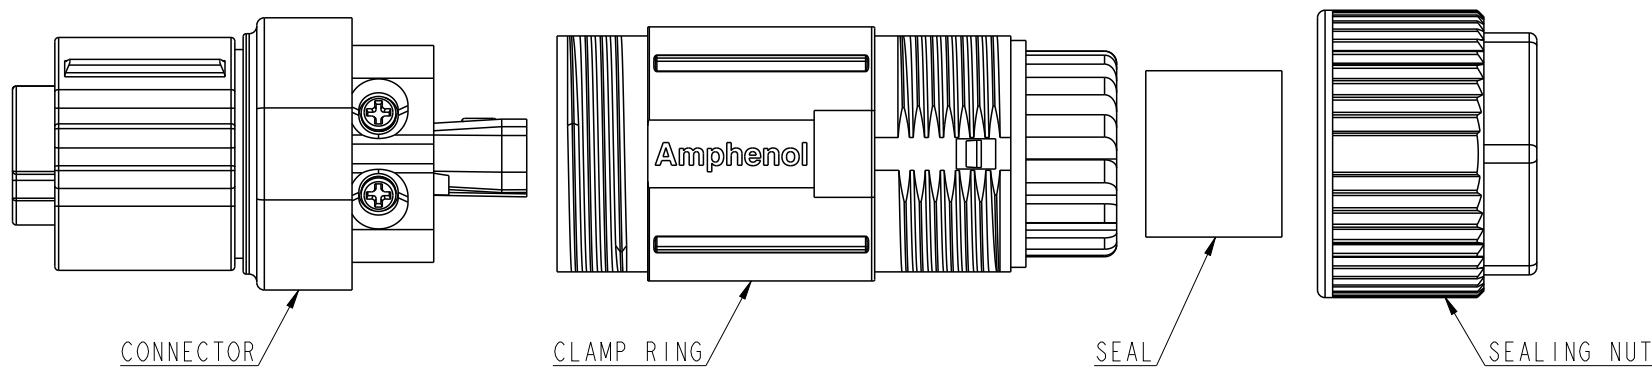

ASD-XXBFF-QL7001
XX: No. Of Pin.

- Note:
- * RoHS Compliant
 - * Important dimension
 - * Waterproof rate: IP67, mated 1m/24h
 - * Connector
 - Housing: Thermoplastic, Black
 - Terminal: Copper Alloy, Gold plated
 - Shield & Spring: Metal
 - XLOK Nut & Screw Nut: Metal
 - Screw & C-Ring: Metal
 - * Clamp Ring: Metal
 - * Seal: Rubber, Gray,
 - For Cable OD Ø4.0mm~Ø8.0mm
 - * Sealing Nut: Metal
 - * One Set Unassembled in One PE Bag.

UNIT:mm			TITLE	
			XLOK, A SHLD-5A, CABLE W/O SR	
			F, F, FI SCREW IN, PUSH LOCK	
TOLERANCE		SCALE	SIZE	SHEET
		2:1	A4	1 OF 1
±0.50mm		REV.	WC-REV.	QC: Inspection item
		A		

Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY	DATE
		ASD-XXBFF-QL7001	Sam Ho	2022-12-26
		CUSTOMER	CHECKED BY	DATE
		ALTW	Fred Lee	2022-12-26
			APPROVED BY	DATE
			Fred Lee	2022-12-26

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.