
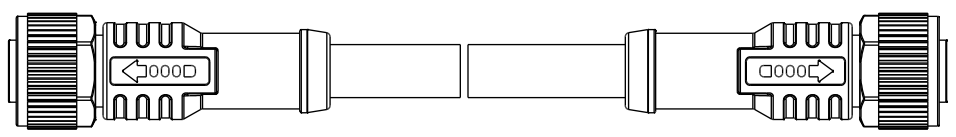


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201735	2020/11/09	Ruru	$\triangle B$ X6
C	C210226	2021/03/30	Vicky	$\triangle C$ X4
D	C221995	2022/12/26	Vicky	$\triangle D$ X1

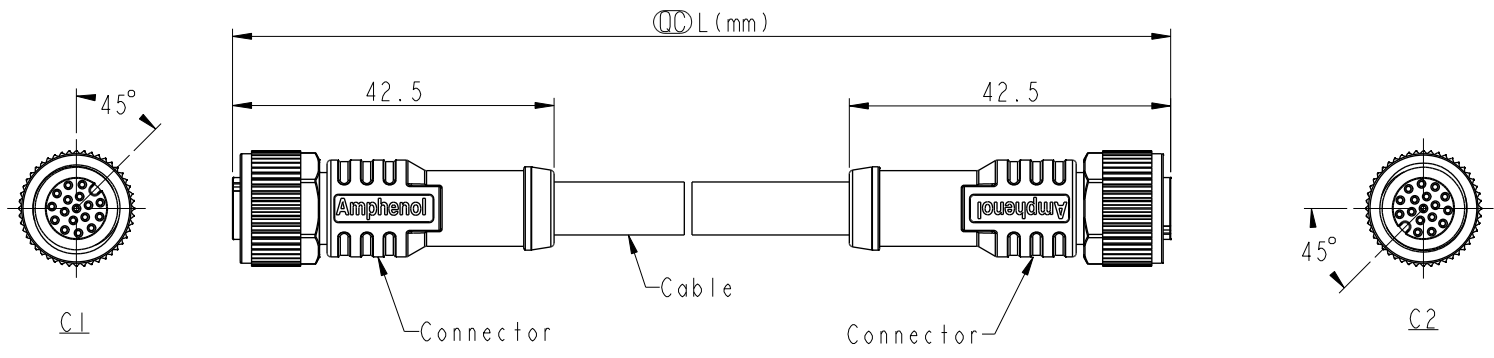

$\triangle B$ $\triangle C$

Note:

- * RoHS Compliant
- * CC Important dimension
- * $\triangle A$ Waterproof rate: IP68, mated 1m/24h
IP69K, mated

- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - O-Ring: Rubber, Green
 - Nut: Metal
 - Outer Mold: Thermoplastic, Black
- * Cable: UL20549, PUR Jacket, Black
- * Cable Length Tolerance:

0.5M < L ≤ 1M	: +60/-0 mm
1M < L ≤ 3M	: +120/-0 mm
3M < L ≤ 5M	: +160/-0 mm
5M < L ≤ 10M	: ±100 mm
10M < L ≤ 20M	: ±200 mm
20M < L ≤ 30M	: ±300 mm
30M < L ≤ 99M	: ±500 mm

UNIT: mm		TITLE	ACC, SEN, A Code, DB-ENDED FF
TOLERANCE	±0.5mm	SCALE	1:2
		SIZE	A4
		SHEET	1 OF 2
		REV.	D
		WC-REV.	
		CC	Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2018-12-05
DWG NO	CHECKED BY	DATE
$\triangle B$ M12AXXFL-12AFL-SBXXX	Rita	2018-12-05
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2018-12-05

