




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C200960	2020/06/23	Ruru	△B X4
C	C230419	2023/03/28	Vicky	△C X2

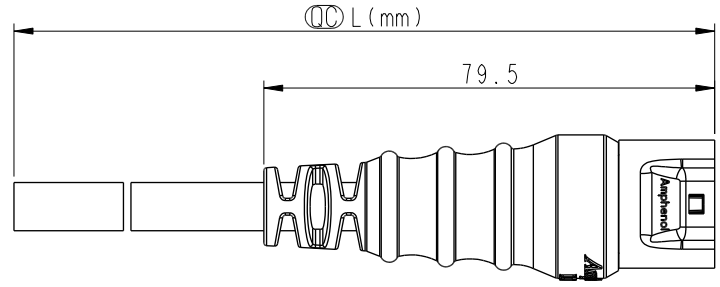


△B CBD-XXAFMM-RL8FXX

XX: No. Of Pin  
 XX: 01~99Meters  
 01: 01Meter  
 02: 02Meters  
 .  
 99: 99Meters

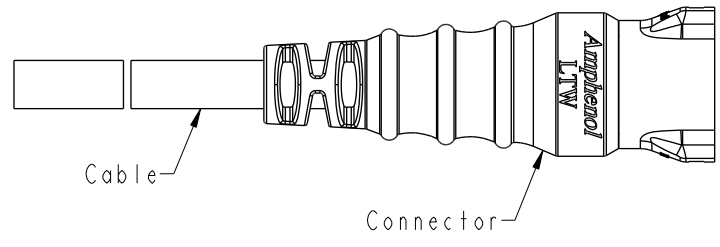

Conn.

- △B Note:
- \* RoHS Compliant
  - \* (Ⓞ) Important dimension
  - \* Waterproof rate: IP68, mated 1m/24h
  - \* Connector
    - Housing: Thermoplastic, Black
    - Pin: Copper alloy, Gold plated
  - △C O-Ring: Rubber, Gray
  - △C Outer mold: Thermoplastic, Black
  - \* Cable: UL21996 (20#\*1P+D+AL)+16#\*3C+F+AL, PVC Jacket, OD=8.5, Black
  - \* Cable length tolerance:
    - 1M < L ≤ 3M: +100/-0 mm
    - 3M < L ≤ 5M: +150/-0 mm
    - 5M < L ≤ 10M: ±100 mm
    - 10M < L ≤ 20M: ±200 mm
    - 20M < L ≤ 30M: ±300 mm
    - 30M < L ≤ 99M: ±500 mm




6P

6	Drain (20AWG)	地線	Twist
5	White (20AWG)	白	
4	Green (20AWG)	綠	
3	Blue (16AWG)	藍	
2	Red (16AWG)	紅	
1	Black (16AWG)	黑	
Conn.	Wire Color	Pin Out	

Pin Assignments Front View

UNIT:mm  
 TOLERANCE  
 ±0.5mm



TITLE RBL, C-10A+5A, CABLE W/SR F, M, MOLDING, RBL			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. C	WC-REV. A.5	Ⓞ: Inspection item	

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Peng	DATE 2019-04-30
DWG NO △B CBD-XXAFMM-RL8FXX	CHECKED BY Mafei	DATE 2019-04-30
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2019-04-30