

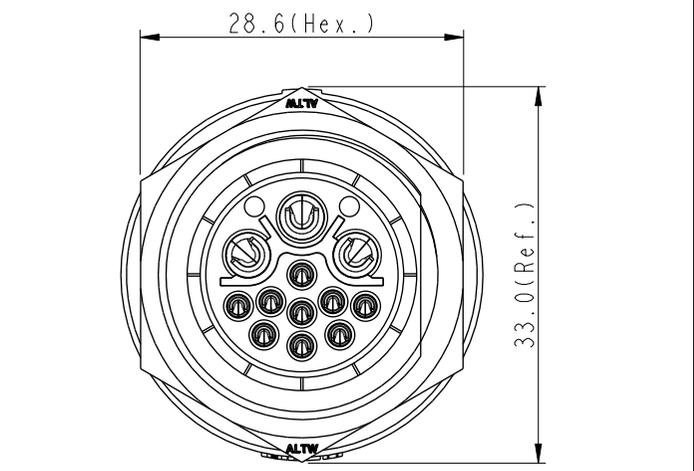
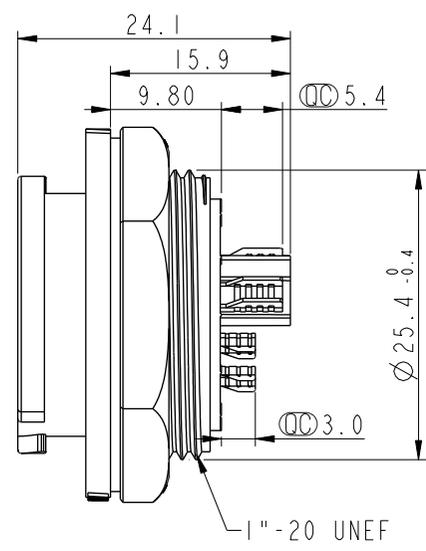
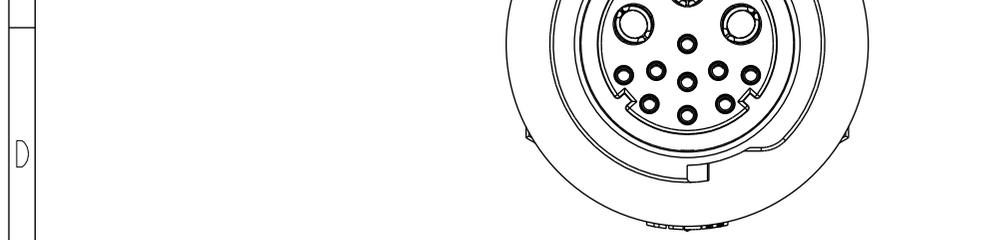
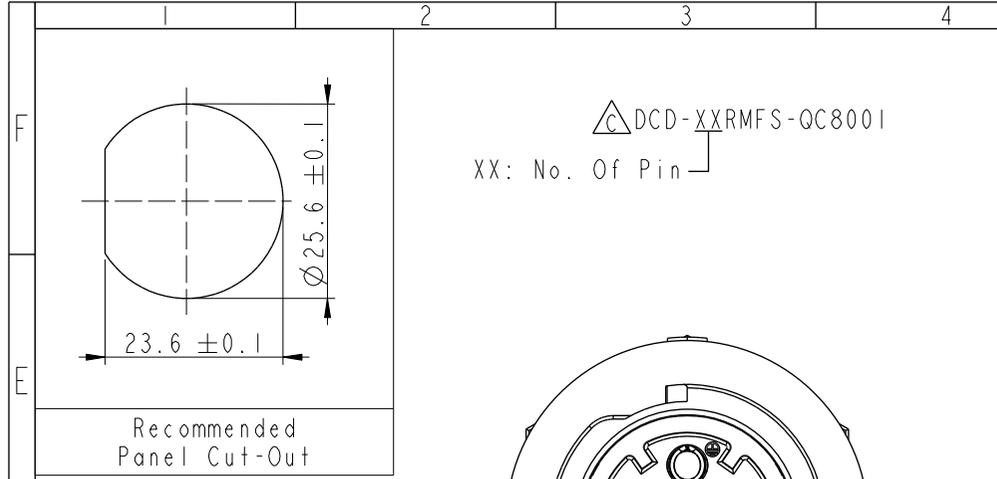


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C190403	2019/03/12	Vicky	Change Note
C	C220628	2022/05/12	Vicky	△X4
D	C230175	2023/02/13	Vicky	△XI

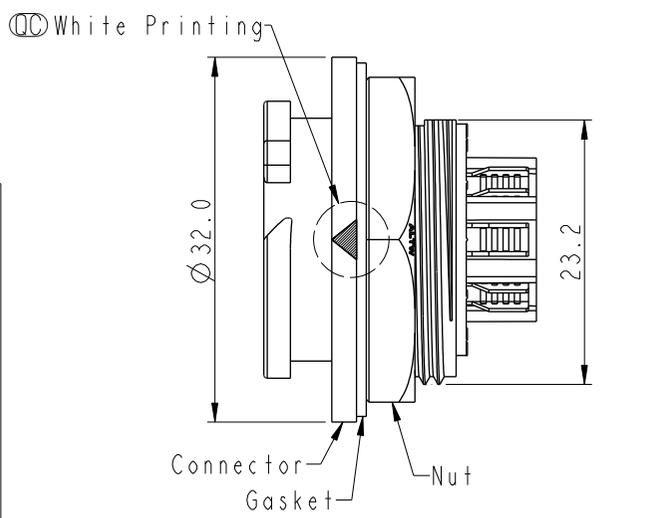

Recommended Panel Cut-Out

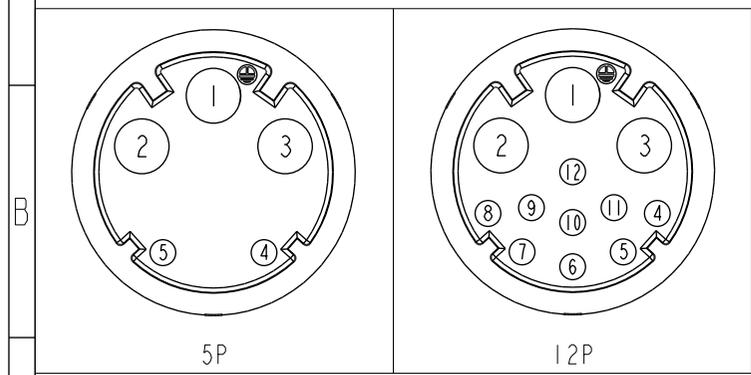

△ B △ C
Note:
* RoHS Compliant
* (QC) Important dimension
* Waterproof rate: IP68, unmated 1m/24h
* Connector
Housing: Thermoplastic, Black
Pin: Copper Alloy, Gold plated
* Nut: Thermoplastic, Black
* Gasket: Rubber, Gray
* For panel thickness max: 3.6mm
* Gasket and nut are packed separately in pe bag

UNIT: mm			TITLE XLOK, D-20A+5A, REAR FASTENED M, F, SOLDER, PUSH LOCK
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	SCALE 3:2	SIZE A4	SHEET 1 OF 1
REV. D	WC-REV. A.2	(QC): Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO.	DWG NO.	CUSTOMER	DRAWN BY	CHECKED BY	APPROVED BY	DATE
	DCD-XXRMFS-QC8001	ALTW	Vicky	Rita	Max	2019-03-12