


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	-	2023/02/06	Ouyang	Initial Release
B	C230219	2023/02/20	Ouyang	△ B x2

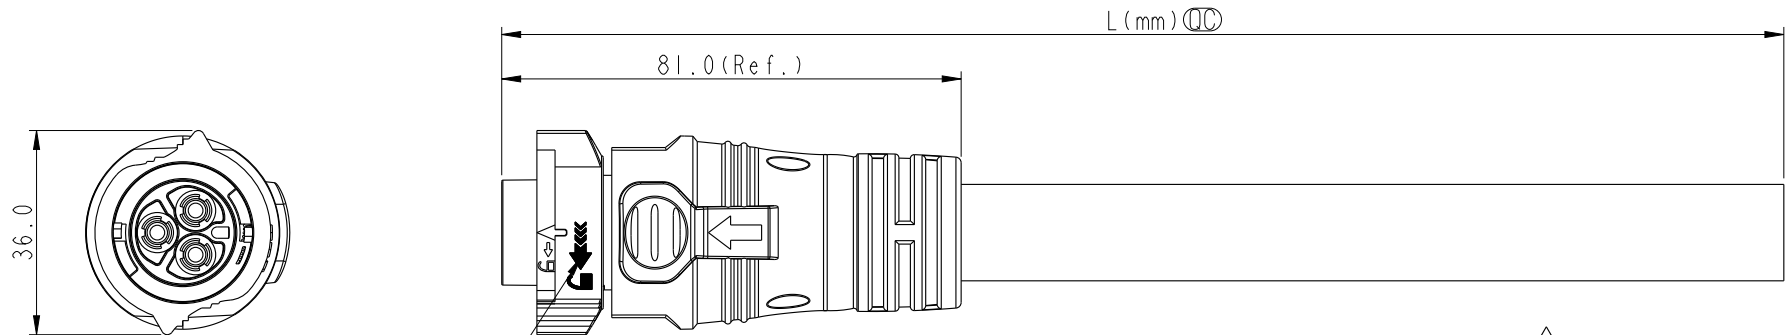


White Printing

DM-XXBFMM-QL8C XX △ B

XX: No. of pin \_\_\_\_\_ XX: 1~99 Meters  
 01: 1 Meter  
 02: 2 Meter  
 :  
 99: 99Meter

Pin	#	Wire
3	Green	綠
2	White	白
1	Black	黑



- Note:
- \* RoHS Compliant
  - \* (C) Important Dimension
  - \* Waterproof Rate: IP68, Mated 1m/24h △ B
  - \* Connector
    - Housing: Thermoplastic, Black
    - Pin: Copper Alloy, Silver Plated
    - O-Ring: Rubber, Black
    - Nut: Thermoplastic, Black
    - Outer Mold: Thermoplastic, Black
  - \* Cable: UL2517, PVC Jacket, Black
  - \* Cable Length Tolerance: 1M: +50/-0 mm
    - 1M < L ≤ 3M: +100/-0 mm
    - 3M < L ≤ 5M: +150/-0 mm
    - 5M < L ≤ 10M: ±100 mm
    - 10M < L ≤ 20M: ±200 mm
    - 20M < L ≤ 30M: ±300 mm
    - 30M < L ≤ 99M: ±500 mm

Pin Assignments  
Fronts View

UNIT:mm	
TOLERANCE	±0.5mm

TITLE X-LOK D SIZE 3PIN CONNECTOR			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. .0	(C) Inspection item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ouyang	DATE 2023/02/06
DWG NO DM-XXBFMM-QL8CXX	CHECKED BY Jerry	DATE 2023/02/06
CUSTOMER ALTW	APPROVED BY Fred	DATE 2023/02/06