






THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
|------|---------|------------|------|------------------|
| B | C231273 | 2023/10/06 | Ruru | $\triangle B$ X5 |
| C | C231384 | 2023/11/01 | Ruru | $\triangle C$ X2 |

$\triangle B$
ABB-XXBFMC-LL7XP0

XX: No. Of Pin

- A: With Red&Yellow&Blue Color Seal
- S: With Red Color Seal, Cable OD 5.0~6.0mm.
- M: With Yellow Color Seal, Cable OD 6.0~8.0mm.
- L: With Blue Color Seal, Cable OD 8.0~10.0mm.

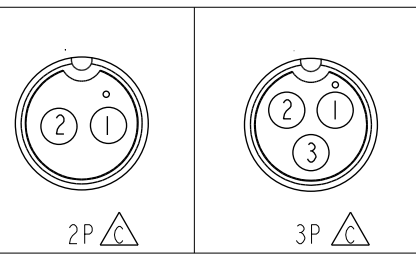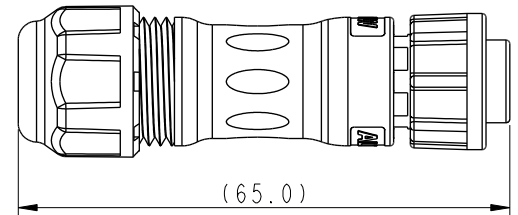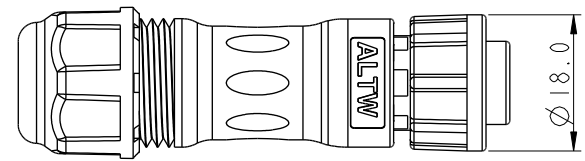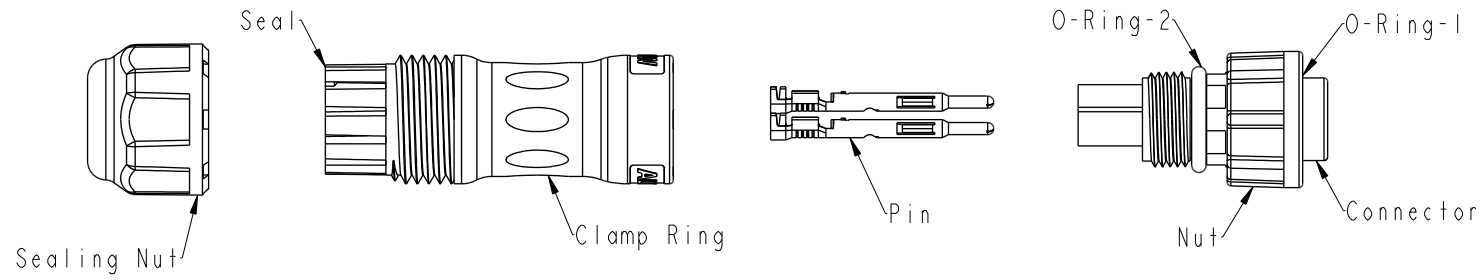

Pin Assignments Front View

- $\triangle B$ Note:
- * RoHS Compliant
 - * \varnothing Important dimension
 - * Waterproof rate: IP67, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Nut: Thermoplastic, Black
 - O-Ring-1: Rubber, Gray
 - O-Ring-2: Rubber, Dark gray
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Sealing : Rubber
 - * One set unassembled in one pe bag

| | | |
|-----------|--|--|
| UNIT:mm | | |
| TOLERANCE | | |
| ±0.5 mm | | |

| | | | |
|---|----------------|---------------------------------|--|
| TITLE N CERES, ST, B-10A, CABLE W/O SR F, M, CRIMP, 2LOCK $\triangle B$ | | | |
| SCALE 8:5 | SIZE A4 | SHEET 1 OF 1 $\triangle B$ | |
| REV. C | WC-REV. A.3 | \varnothing : Inspection item | |

Amphenol LTW
安費諾亮泰企業股份有限公司

| | | |
|--|---------------------|--------------------|
| ITEM NO. | DRAWN BY Ruru | DATE 2023-11-01 |
| DWG NO. $\triangle B$ ABB-XXBFMC-LL7XP0 | CHECKED BY Rita | DATE 2023-11-01 |
| CUSTOMER ALTW | APPROVED BY Fred | DATE 2023-11-01 |