











	1	2	3	4	5	6	7	8	
F					REV.	ECN NO.	DATE	SIGN	DESCRIPTION
					B	C231272	2023/10/05	Vicky	X4
E									
D									
C									
B									
A									






























XX: No. Of Pin




S: With Red Color Seal 1, Cable OD 6.0~8.0mm
M: With Yellow Color Seal 2, Cable OD 8.0~10.0mm
L: With Blue Color Seal 3, Cable OD 10.0~12.0mm
A: With Seal 1 & Seal 2 & Seal 3

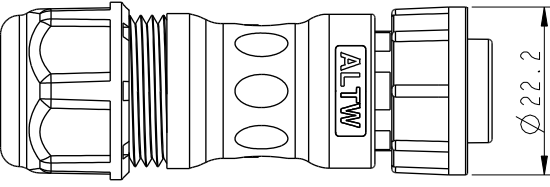


(65.0)

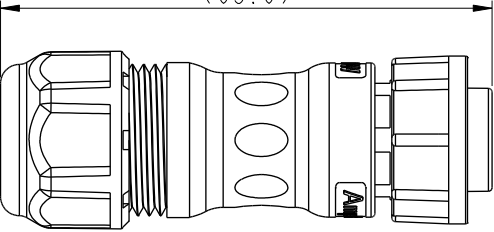




4P





5P



6P

Pin Assignments Front View

UNIT:mm



TOLERANCE

±0.5 mm

TITLE

N CERES, ST, C-10A, CABLE W/O SR

F, F, CRIMP, 2LOCK

SCALE

8:5

SIZE

A4

SHEET

1

OF

1

REV.

B

WC-REV.

A.3

Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO

DWG NO

ACB-XXBFFC-LL7XP0

CUSTOMER

ALTW

DRAWN BY

Peng

CHECKED BY

Mafei

APPROVED BY

Jerry

DATE

2018-12-15

DATE

2018-12-15

DATE

2018-12-15

Note:

* RoHS Compliant

* Important dimension

* Waterproof rate: IP67, mated

* Connector

Housing: Thermoplastic, Black

Pin: Copper Alloy, Gold plated

Nut: Thermoplastic, Black

O-Ring 1: Rubber, Gray

O-Ring 2: Rubber, Dark gray

* Clamp Ring: Thermoplastic, Black

* Sealing Nut: Thermoplastic, Black

* Seal: Rubber

* One set unassembled in one pe bag

W10814-03-0001A2

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.