
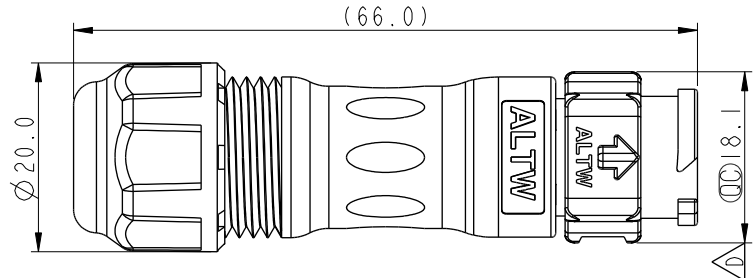



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C191760	2019/10/15	Jane	X5
D	C192023	2019/11/20	Vicky	X4
E	C231241	2023/09/22	Ruru	X2

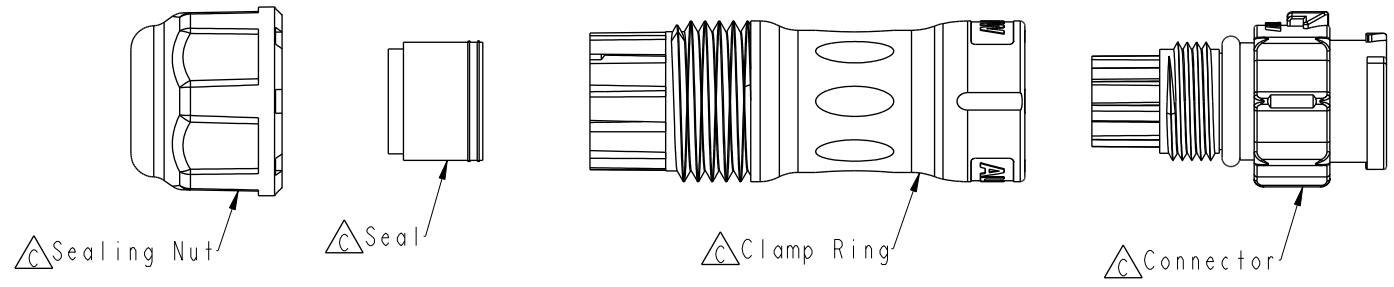

BD-XXBMM-QL8XNO  
 XX: No. Of Pin

- S: With Red Color Seal 1, Cable OD 5.0~6.0mm.
- M: With Yellow Color Seal 2, Cable OD 6.0~8.0mm.
- L: With Blue Color Seal 3, Cable OD 8.0~10.0mm.
- A: With Seal 1 & Seal 2 & Seal 3.

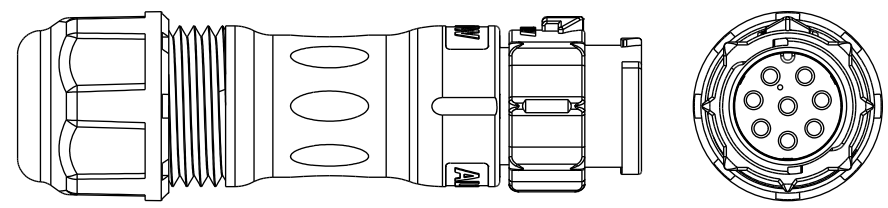

- Note:
- \* Important Dimension
  - \* Waterproof Rate: IP68, mated 1m/24h
  - \* Housing: Thermoplastic, Black
  - \* Clamp Ring: Thermoplastic, Black
  - \* Sealing Nut: Thermoplastic, Black
  - \* Seals: Rubber
  - \* One set unassembled in one pe bag

Pin Assignments Front View	2 Pin	3 Pin	4 Pin	5 Pin	6 Pin	7 Pin	8 Pin

UNIT:mm TOLERANCE ±0.5mm		TITLE XLOK, B-5A, CABLE W/O SR M, M, FI CRIMP, XLOK			<h1>Amphenol LTW</h1> <h2>安費諾亮泰企業股份有限公司</h2>		ITEM NO	DRAWN BY Brady Chung	DATE 2019-09-24
		SCALE 1:1	SIZE A4				SHEET 1	OF 1	DWG NO BD-XXBMM-QL8XNO
REV. E	WC-REV. A.5	QC: Inspection item		CUSTOMER ALTW	APPROVED BY Neo Tsai	DATE 2019-09-24			