
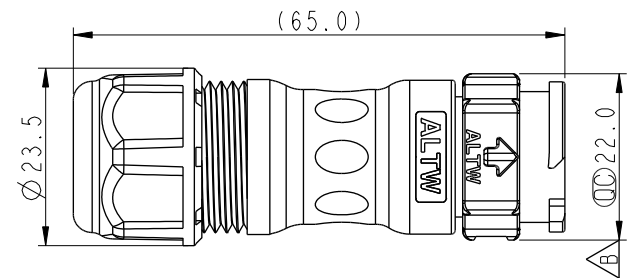


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2016/11/23	Victor Hung	Change Rev.01 To Rev.A
B	C192027	2019/11/21	Vicky	$\triangle B$ X4
C	C231238	2023/09/20	Vicky	$\triangle C$ X1

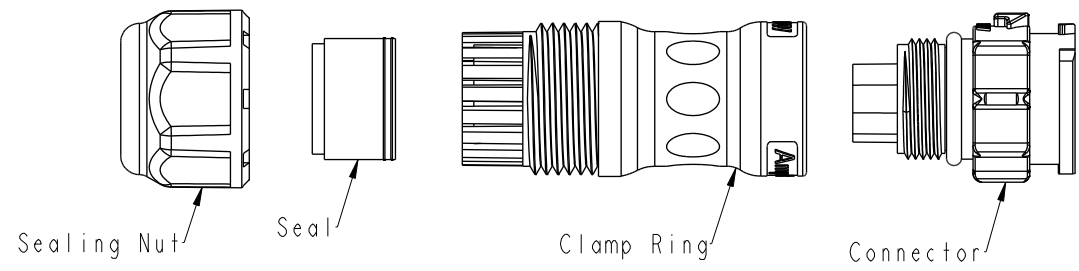

CD-XXBMFA-QL8XN0

07- 7Pin
08- 8Pin
09- 9Pin

S: With Red Color Seal 1, Cable OD 6.0~8.0mm.
M: With Yellow Color Seal 2, Cable OD 8.0~10.0mm.
L: With Blue Color Seal 3, Cable OD 10.0~12.0mm.
A: With Seal 1 & Seal 2 & Seal 3.

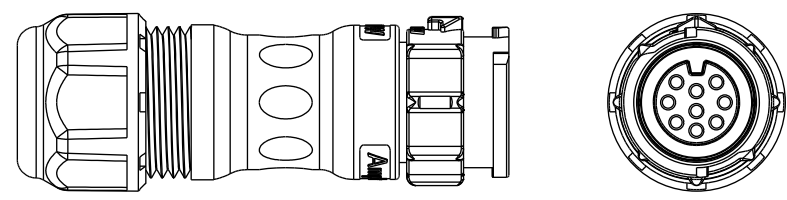

- $\triangle B$ Note:
- * \varnothing Important Dimension
 - * Waterproof Rate: IP68, Mated
IP68: 1M Depth Of Water In 24hours
 - * Housing: Thermoplastic, Black
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Seals: Rubber
 - * $\triangle C$ One set unassembled in one pe bag

Pin Assignments Front View	7 Pin	8 Pin	9 Pin

UNIT:mm		TITLE	XLOK, C-5A, CABLE W/O SR M, F, FI CRIMP, XLOK	
TOLERANCE	$\pm 0.5mm$	SCALE	1:1	SIZE A4
		REV.	C	WC-REV. A.5
				\varnothing : Inspection item

Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY	DATE
			Victor Hung	2016-11-23
		DWG NO	CHECKED BY	DATE
		CD-XXBMFA-QL8XN0 $\triangle B$	Wes Fan	2016-11-23
		CUSTOMER	APPROVED BY	DATE
		ALTW	Kevin Hu	2016-11-23