
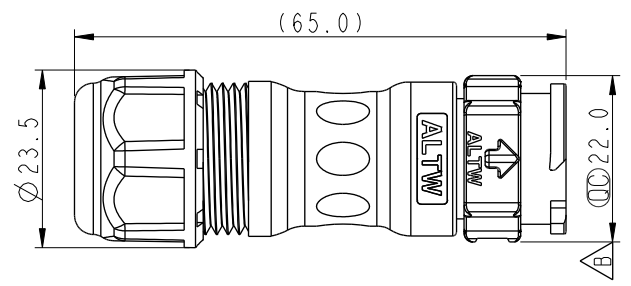


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2016/11/23	Victor Hung	Change Eev.01 To Rev.A
B	C192027	2019/11/21	Vicky	$\triangle B$ X4
C	C231238	2023/09/20	Vicky	$\triangle C$ X1

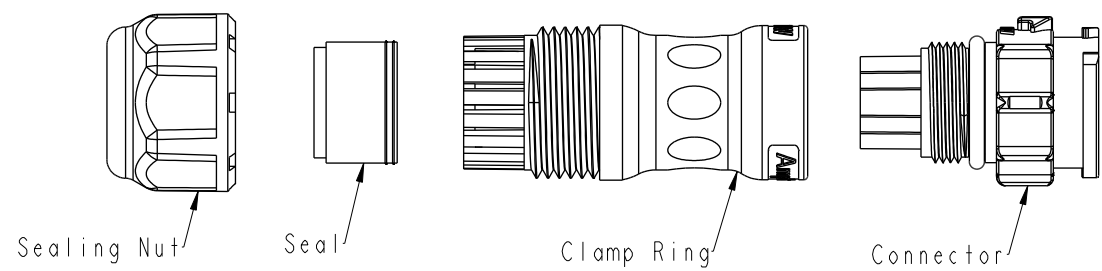

CD-XXBMMA-QL8XN0

08- 8Pin
09- 9Pin
10-10Pin
12-12Pin

S: With Red Color Seal 1, Cable OD 6.0~8.0mm.
M: With Yellow Color Seal 2, Cable OD 8.0~10.0mm.
L: With Blue Color Seal 3, Cable OD 10.0~12.0mm.
A: With Seal 1 & Seal 2 & Seal 3.

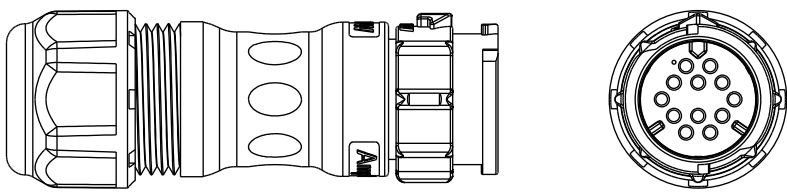

Pin Assignments Front View



8 Pin



9 Pin



10 Pin



12 Pin

- $\triangle B$ Note:
- * \varnothing Important Dimension
 - * Waterproof Rate: IP68, Mated
IP68: 1M Depth Of Water In 24hours
 - * Housing: Thermoplastic, Black
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Seals: Rubber
- $\triangle C$ * One set unassembled in one pe bag

A	UNIT:mm	\varnothing	∇	TITLE	XLOK, C-5A, CABLE W/O SR M, M, FI CRIMP, XLOK		Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRWN BY	DATE	
	TOLERANCE	$\pm 0.5mm$		SCALE	1:1	SIZE		A4	DWG NO	CHECKED BY	DATE
		REV.	C	WC-REV.	A.5	SHEET		1	OF	1	APPROVED BY
							\varnothing : Inspection item	CUSTOMER	ALTW	WES FAN	
									Victor Hung	2016-11-23	
									Wes Fan	2016-11-23	
									Kevin Hu	2016-11-23	